

- Note**
- Ask an authorised Daikin dealer to install Daikin products. Do not try to install the product yourself or get it installed by any unauthorised dealer. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion. Warranty of the product shall be void if not installed by an authorised Daikin dealer.
  - Use only those parts and accessories supplied or specified by Daikin. Ask authorised Daikin dealer for any repair or component. Warranty of the product / component shall be void if non-specified spares are used or repaired by a non Daikin dealer.
  - Please ensure to install ELCB (Earth Leakage Circuit Breaker) for outdoor units to prevent ground fault effects.
  - Read the user's manual carefully before using the product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

For any enquiry, either call the numbers mentioned below or contact your nearest Daikin dealer.



WORLD'S LEADING AIR CONDITIONING  
COMPANY FROM JAPAN



# ADVANTAGE

**X' TENSIVE**  
RANGE

**X' TRA**  
POWER SAVINGS

**X' CELLENT**  
TECHNOLOGY

**X' TENDED**  
RELIABILITY

**DAIKIN**

#816, 8th Floor, Purshottam Place Delta Tower 1, Westland, Nairobi, Kenya

- The specifications, designs, and information in this brochure are subject to change without notice.

DAIPL-2020/20-VRVXEA-1A

PRESENTING THE NEW  
Heat Pump | Cooling Only



# INDEX

SALIENT FEATURES .....	6
OUTDOOR UNIT LINE-UP .....	19
INDOOR UNIT LINE-UP .....	20
SPECIFICATIONS .....	42
OUTDOOR UNIT COMBINATIONS .....	62
OPTION LIST .....	63
CONTROL SYSTEMS .....	68
AIR TREATMENT EQUIPMENT LINE-UP .....	92

## VRV X

Equipped with Advanced Technology, that results in high energy efficiency. This technological innovation gives end user the advantage of better comfort and works further towards creating a sustainable environment.





# DAIKIN

## The world leader in air conditioning

At Daikin, we are a leading innovator and provider of advanced, high-quality air conditioning solutions for residential, commercial and industrial applications.

As world's leading air conditioning company, we are committed to deliver air conditioning solutions that enhance the quality of life all around the world.

Established in 1924, Daikin Industries Ltd., is a diverse multinational company, active in air conditioning, chemicals and oil hydraulics. With headquarters at Osaka, Japan, our Daikin family has more than 67,000 members, working across 80 production base and 208 consolidated subsidiaries worldwide.

As the world's sole manufacturer that develops a long line of products from refrigerants to air conditioners, we advocate comfortable living on the strength of advanced technologies.

We are present in USA, Europe and Russia, The Middle East, Africa, Asia, Oceania and Middle-South America. We aim to serve our customers in each of these markets by providing optimal air conditioning solutions.



### EUROPE / MIDDLE EAST / AFRICA



Daikin Europe N.V.



Daikin Airconditioning France



Daikin Airconditioning Germany



Daikin Airconditioning Central Europe



Daikin Airconditioning Spain



Daikin Airconditioning Italy



Daikin Airconditioning UK



Daikin Industries Czech Republic



Daikin Chemical France

### CHINA



Daikin (China) Investment



Daikin Airconditioning Shanghai



Xi'an Daikin Qing'an Compressor



Hui Zhou Daikin Suns Airconditioning



Daikin Device (Suzhou)



Daikin Fluoro Coating Shanghai



Daikin Fluorochemicals China

### ASIA / OCEANIA



Daikin Airconditioning India



Daikin Compressor Industries



Daikin Airconditioning Singapore



Daikin Australia



Daikin Industries Thailand



Daikin Industries Head Office Japan (Inside Umeda Centre Building)

### NORTH AMERICA / CENTRAL & SOUTH AMERICA



Daikin America



Daikin AC America



Daikin Holding USA



## Exploring new R&D frontiers

At Daikin, we are creating value through innovative technologies. As a global industry front-runner, we are carrying out research and development on the world's most advanced air conditioning technology.


Our strong R&D edge has helped us create futuristic products that enrich people's lives. As symbolised by the VRV, Daikin has put forth a multitude of products and varied technology that have always been and continue to be, at the forefront of innovation.

To be able to offer such products and services that delight and astound our customers, we have constructed an advanced R&D architecture.



Formation of a three-division system of research, IT and development to support our superior products.


To create more advanced functions and new value, we have instituted specialised R&D divisions: the 'Environmental Technology Research Laboratory' and the 'Solution Product Development Centre'. In combination with the Product Development Group, each of the three divisions work in close co-operation to precisely ascertain the customers' needs and to enable commercialisation of products, incorporating advanced technology that take the lead over our competitors.

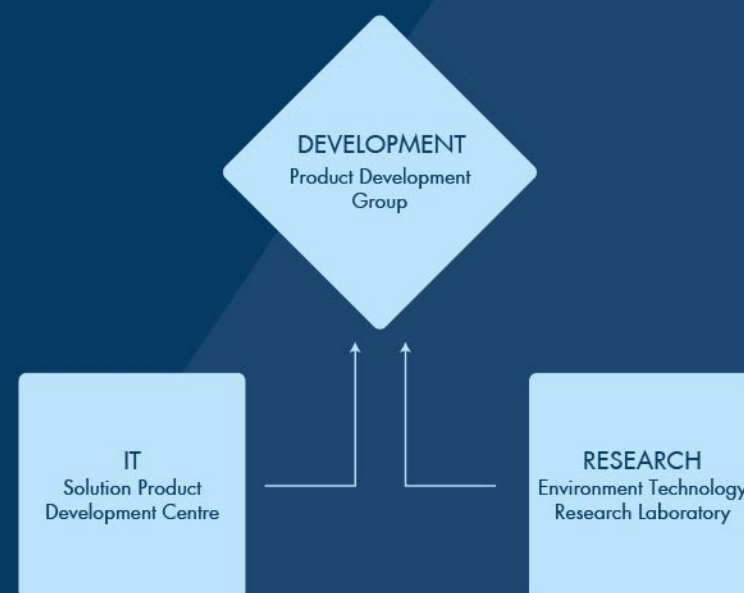

Environmental Technology Research Laboratory: Intensive Research on Environmentally Conscious, Energy Saving Air Conditioning Technology

Accelerating globalisation of our air conditioning business and varied needs of customers across geographies are increasing our research challenges. We have established a research laboratory devoted to the two fields of 'air conditioning' and 'the environment'. With our mission to promote energy savings in air conditioners, we are engaged in R&D on cutting-edge technologies. Our aim is to create futuristic products from fundamental research on motor inverters and other areas to support individual product development.

Going forward, we will elevate our technology edge to achieve further business expansion globally.

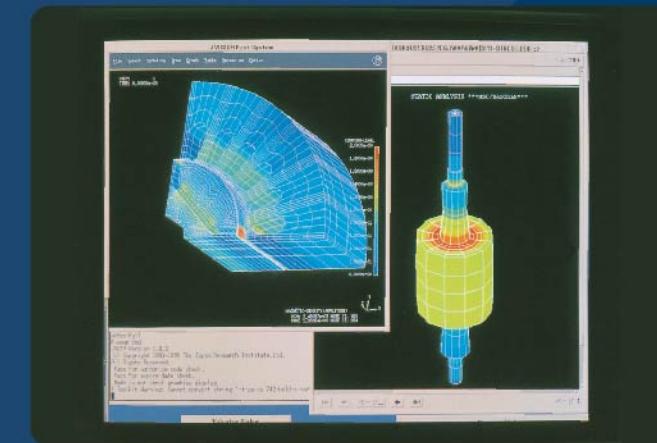

The Solutions Product Development Centre: Integrating Air Conditioners with IT

Keeping in mind the changes in business brought in by the computerisation and networking of society, we have integrated IT into our airconditioners, including communication technology, software technology and digital control. We are initiating R&D that will offer new system services - a comfortable environment with superior energy savings by networking air conditioners. Such a scenario will enable them to exchange information with service centres.

Technology & Innovation Centre, Japan:

Aiming for new value creation as a core base for technology development.





## X' TENSIVE RANGE UP TO 60 HP



World's most advanced **VRV X** air conditioning system with Innovative VRT technology.

First launched in Japan in 1982, the Daikin VRV system has been embraced by the world markets for over three decades. Now, we at Daikin introduce the next generation VRV X system to reinforce our industry leadership. The system offers an enhanced line-up to meet an ever widening variety of needs, while improving energy savings, comfort and ease of installation.

The VRV X is the most advanced air conditioning system in the world and is ideal for small and large spaces.

### Energy saving technology for VRV X System

#### X' TRA POWER SAVINGS

Next Generation Compressor & VRT Smart Control

#### VRT-Variable Refrigerant Temperature in Indoor Unit (IDU) and Outdoor Unit (ODU)

The new VRV X system now features VRT technology in IDU & ODU. VRT automatically adjusts refrigerant temperature to individual building load and climate requirement, thus further improving annual energy efficiency and maintaining comfort. With this technology, running costs are reduced.

**X' TENSIVE RANGE**  
Up to 60 HP

**X' CELLENT TECHNOLOGY**  
4D Inverter System

**X' TENDED RELIABILITY**  
Auto-Optimisation Refrigerant Charging

### Standard Type


New series with compact and light weight design

6 HP-60 HP with 56 models line-up (For Heat Pump & Cooling Only)



Installation Space	0.95 m <sup>2</sup>
Product Weight*	285 kg

\*For cooling only model

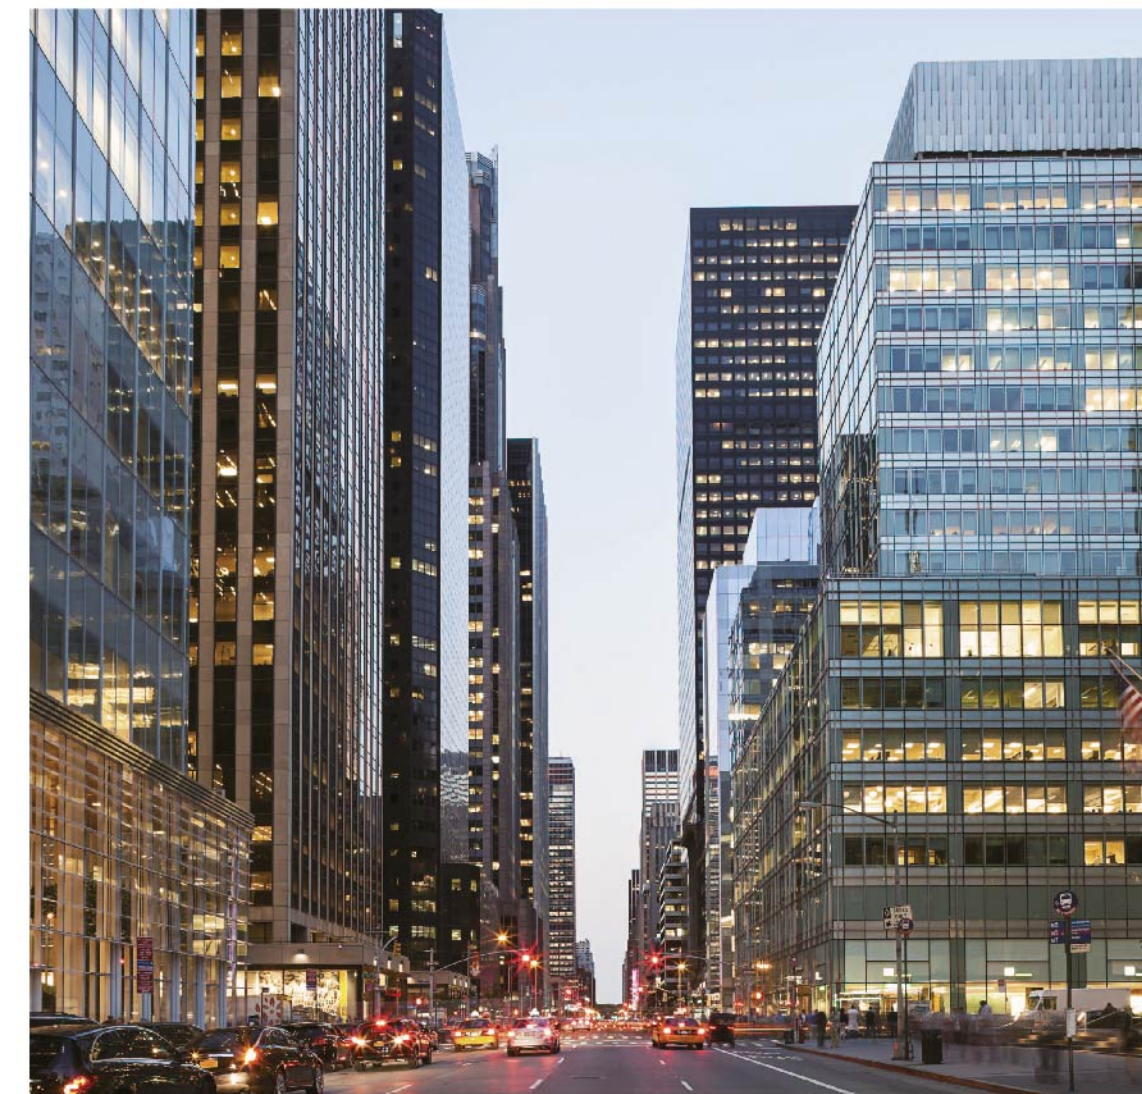

#### Line-up

HP	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
Cooling Only/ Heat Pump	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●



# X' TRA POWER SAVING



## New heights in energy efficiency during actual operation


The key to innovative energy savings is to increase efficiency during low-load operation.

Using data gathered from actual operation, Daikin discovered that air conditioning systems operate at a load factor of 50% or less for 70% of their annual operation period.

This inspired us to develop new technologies to enhance energy efficiency during low loads.

Utilising these technologies, Daikin's new VRV X series raise the standard for energy efficiency.

• Correlation between the load factor for the rated capacity and operation time  
\* According to a survey by Daikin (based on Air Conditioning Network Service System data)

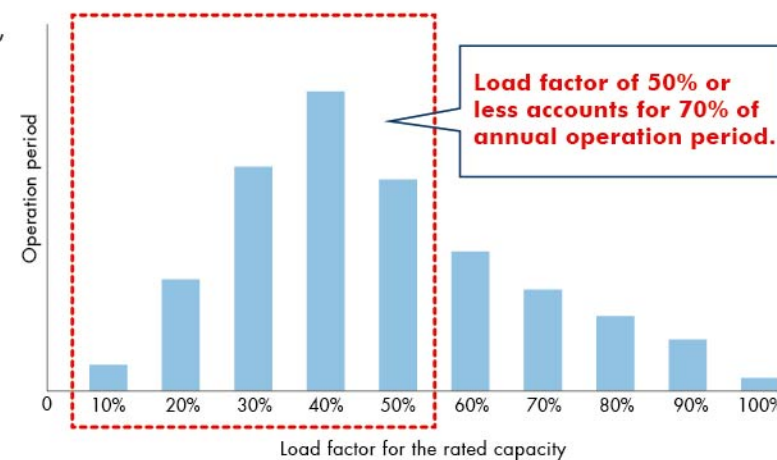


## New Scroll Compressor\*

### Refrigerant leakage is minimised during low-load operation.

Operation loss due to refrigerant leakage is reduced by the proprietary back pressure control mechanism to ensure stable low-load operation.

Hardware technology

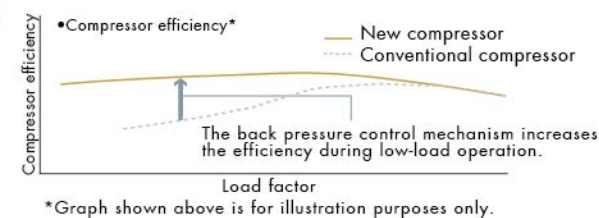

\* Graph shown above is for illustration purposes only.

## Back pressure control mechanism

### Conventional mechanism


The movable scroll is pressed by the pressure difference between high and low pressures. The force pressing the movable scroll decreases during low-load operation, results in compression leakage from movable parts.



The force pressing the movable scroll decreases during low-load operation.


### New intermediate pressure mechanism

The force pressing the movable scroll is optimised according to operating conditions. The behaviour of the movable scroll has been stabilised to increase efficiency during low-load operation.

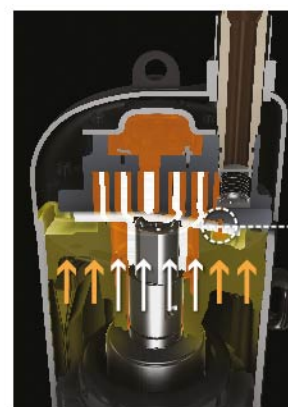

The intermediate pressure keeps pressing the movable scroll during low-load operation.

Intermediate pressure adjustment port  
The intermediate pressure (back pressure) optimises the force pressing the movable scroll depending on the operating condition.

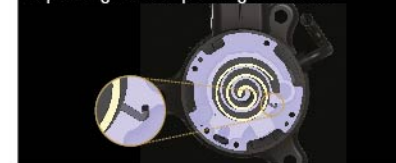

## Energy saving

VRV+VRT+VAV

Uniting advanced software and hardware technologies for greater energy savings during actual operation.

### VRT Smart Control (Fully Automatic Energy-saving Refrigerant Control)


Software technology

#### Optimally supply only for the needed capacity of indoor units

Daikin developed VRT smart control by combining air volume control (VAV: Variable Air Volume) for indoor units with conventional VRT control, which optimises compressor speed by calculating the required load for the entire system and optimal target refrigerant temperature based on data sent from each indoor unit. Coordination with the air volume control reduces compressor load and minimises operation loss based on detailed control. VRT smart control ensures energy savings and comfortable air conditioning to meet actual operating conditions.


- Overview of the control (system control flow)

Different automatic energy-saving refrigerant control applies depending on the indoor units connected.

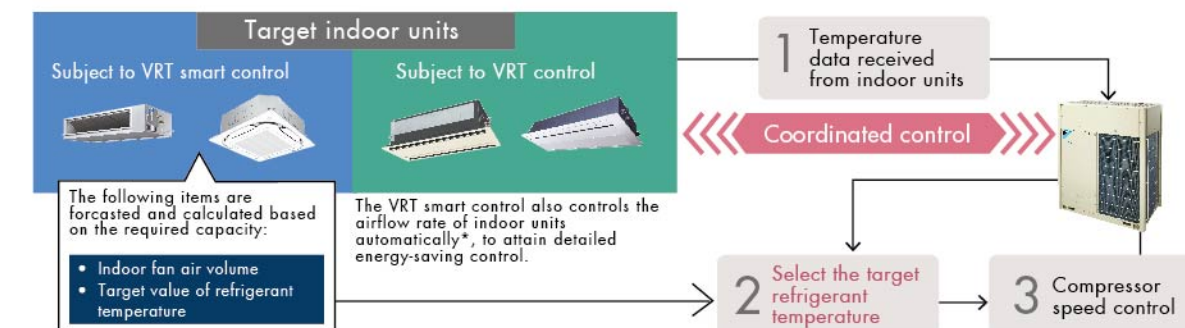

The smooth control (which keeps the compressor running) saves energy and ensures comfort during low-load operation.

- Changes in the air-conditioned room temperature during low-load operation\*

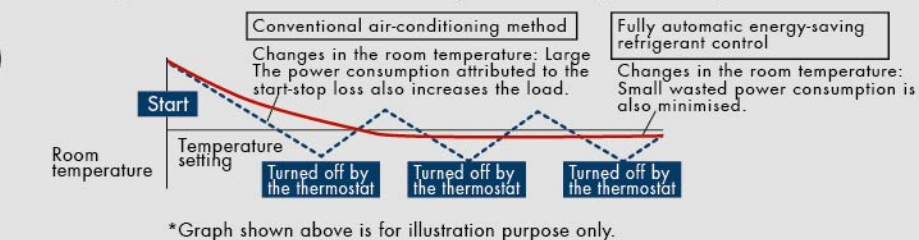


\* Graph shown above is for illustration purpose only.

Note:

- For the classification of indoor units (VRT smart control and VRT control), refer to page 20.
- In case system is having both VRT Control and VRT Smart Control types of Indoor units, system will operate under VRT Control.
- If a system has air handling unit or outdoor-air processing type indoor units, VRT smart control and VRT control are disabled.

## Higher efficiency is provided during rated operation.

COP at 100% operation load

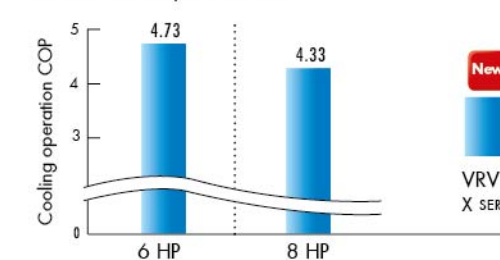

Cooling operation conditions: Indoor temp, of 27°CDB, 19°CWB and outdoor temp, of 35°CDB.

## Advanced oil temperature control

### Standby power consumption is reduced

The advanced oil temperature control reduces standby power consumption compared to conventional models. Standby power is needed for preheating refrigerator oil, which consumes substantial standby power and is reduced to save energy when the air conditioner is stopped.



# VRT - VARIABLE REFRIGERANT TEMPERATURE



## State-of-the-art energy saving technology for VRV system


### Customise your VRV system for optimal annual efficiency

The new VRV X system features VRT technology. VRT automatically adjusts refrigerant temperature to individual building and climate requirement, thus further improving annual energy efficiency and maintaining comfort.


With this excellent technology, running costs are reduced.

How is energy reduced?

During cooling, the refrigerant evaporating temperature ( $T_e$ ) is raised to minimise the difference with the condensing temperature. During heating, the condensing temperature ( $T_c$ ) is lowered to minimise the difference to the evaporating temperature. Compressors work less and this reduces power consumption.

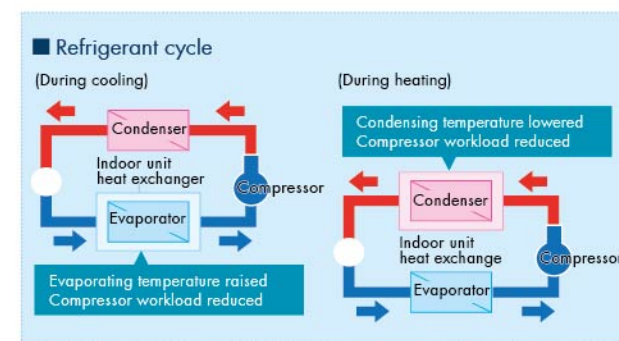


Typical changes in evaporating temperature and COP depending on changing indoor load

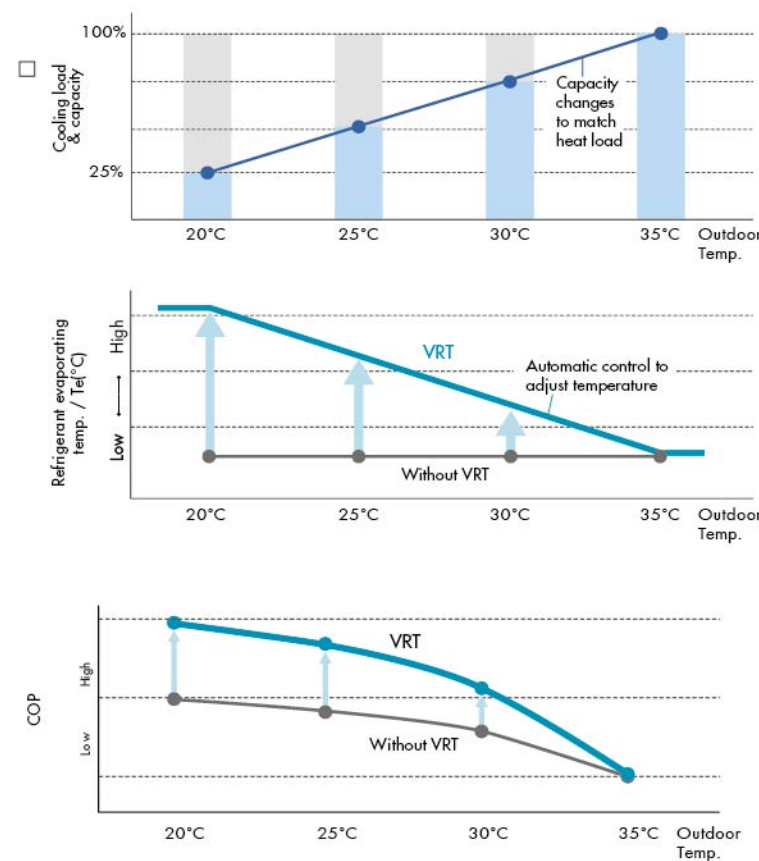


## Fine control to match user preference available through mode selection

Basic mode is selected to maintain optimal comfort.

VRT is selected to save energy and prevent excessive cooling or heating.

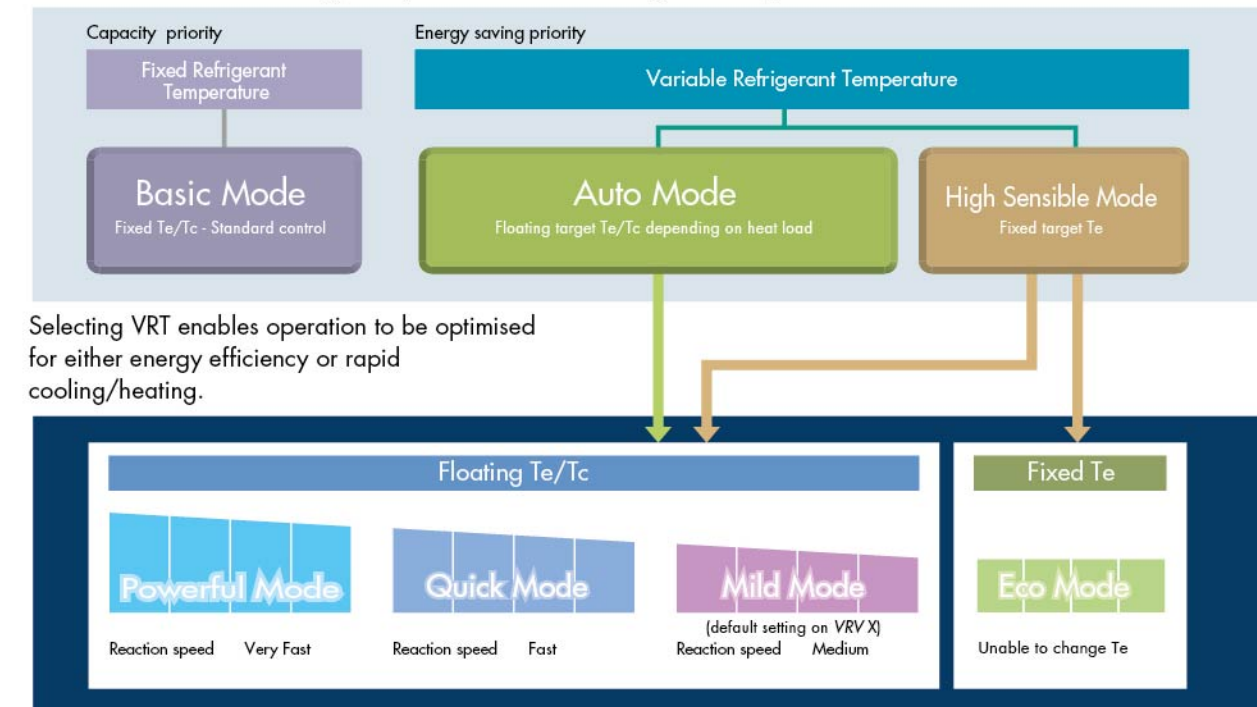


VRT offers quicker cool down to shorten uncomfortable pull down time.

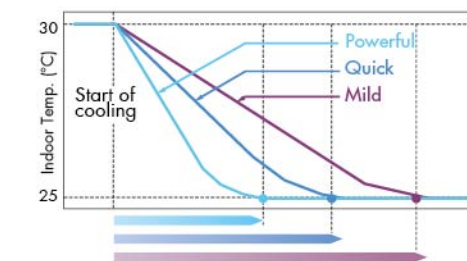

<b>Powerful mode</b>	The refrigerant temperature can go low in cooling (high in heating) than the set minimum (maximum in heating). Gives priority to very fast reaction speed. The refrigerant temperature goes down (or up in heating) fast to keep the room setpoint stable.
<b>Quick mode</b>	Gives priority to fast reaction speed. The refrigerant temperature goes down (or up in heating) fast to keep the room setpoint stable.
<b>Mild mode</b>	Gives priority to efficiency. The refrigerant temperature goes down (or up in heating) gradually, giving priority to the efficiency of the system instead of the reaction speed.


## Recommended for use in these situations

□ Cooling only regions having differences in daily temperature.

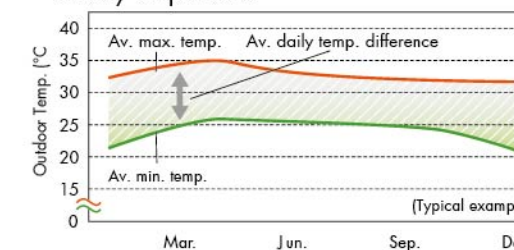

VRT is particularly effective at night when temperatures are low.

□ Cooling/heating regions having periods of mild outdoor temperatures.

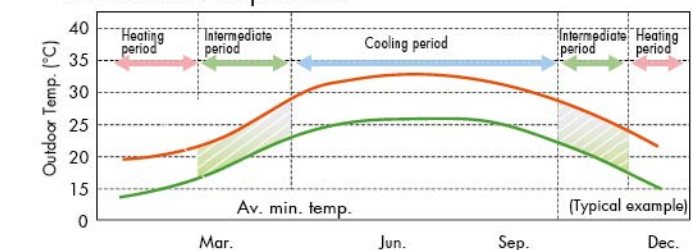

VRT is particularly effective during the intermediate periods.



## X' CELLENT TECHNOLOGY




### Large capacity all DC inverter compressor in compact casing


Large capacity inverter compressor using high tensile strength material, realise 12 HP compressor using 8 HP casing.

#### Compact & high efficiency concentrated winding motor

Distributed winding motor  
(Current 8 HP compressor)

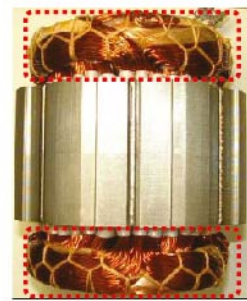

Concentrated winding motor  
(New 12 HP compressor)

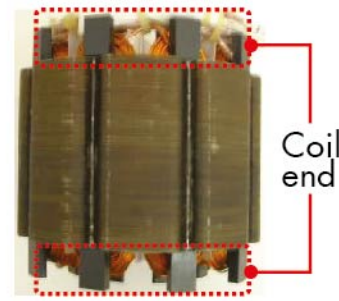


Small size coil end using concentrated winding, reduces copper loss(winding resistance).  
Improves motor efficiency in low rpm range (improves intermediate efficiency).


### Highly integrated heat exchanger

Improves performance by increasing heat exchanger area while maintaining the same installation space.

#### Conventional



Fine Louvre Fin



Waffle Fin

Realises highly integrated heat exchanger performance by employing 3 rows and reduced fin pitch coil as well as reduction in airflow resistance by adopting small pipe size design.



20 HP

3 rows with small pipe design, increase heat transfer efficiency




### 4D Inverter Technology

Improved reliability by introducing Daikin 3-phase capacitor-less 4D Inverter technology

4Ds mean...

- Direct Inverter
- Dynamic
- Drive
- High Energy Density

- Direct conversion circuit which eliminates the electrolytic capacitor and minimise the reactor size
- Dynamic waveform control that suppresses the resonance phenomenon generated by miniaturizing parts
- Drive technology
- High Density integration of parts on small printed circuit board

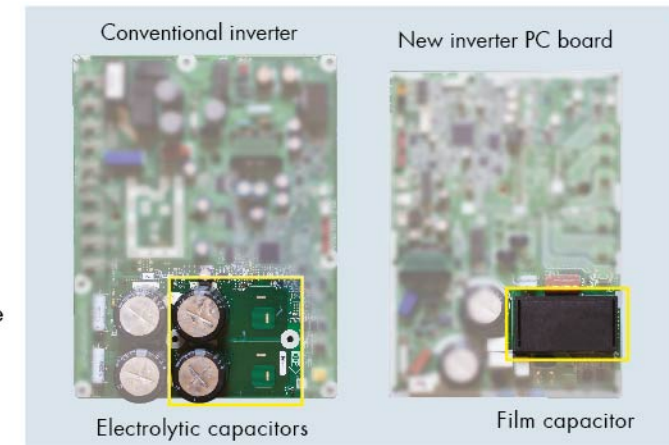

#### New Inverter PC Board

The control functions of inverter technology have been integrated on printed circuit boards. As well as improving reliability, this has reduced the number of parts and enabled downsizing.

- New waveform control improves tolerance of variations in power supply voltage. Even if the power supply has irregularities, rises in current are suppressed and operation continues.
- Durability of the inverter printed circuit board improved by changing the electrolytic capacitors for the compressor to film capacitors.

### Excellent Performance

#### Various advanced control main PC board

##### SMT\* packaging technology


SMT packing technology adopted by the whole computer control panel improve the anti-clutter performance.

Protects your computer board from adverse effect of sandy and humid weather.

SMT packaging material




\*SMT: Surface mounted technology

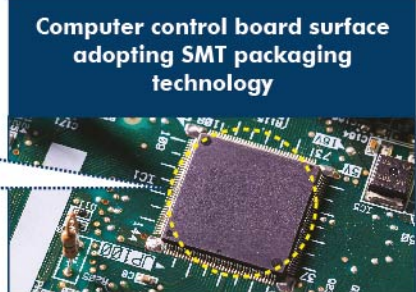

#### Improved inner design to increase smooth airflow

Downsizes electric component, relocates to dead space of bell mouth side to decrease airflow resistance.

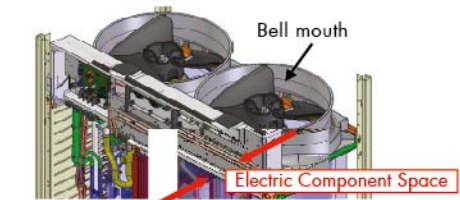



## ADVANCE TECHNOLOGY ACHIEVED

## X' TENDED RELIABILITY



## ● Excellent Performance ●

VRV X



**Refrigerant cooling technology,  
ensures stability of PCB temperature**

**Improves reliability at high ambient temperature**

It is possible to cool the inverter power module stability even at high ambient temperature. This helps to keep air conditioning capacity and also ensures efficient and reliable operation.


## ● Comfort ●

**Lower operation sound**

Improves heat exchanger efficiency, helps to reduce operation sound.

Large airflow, high static pressure and quiet technology.

Without increasing operation sound, advanced analytic technologies are utilised to optimise fan design, increase airflow rate and external static pressure.

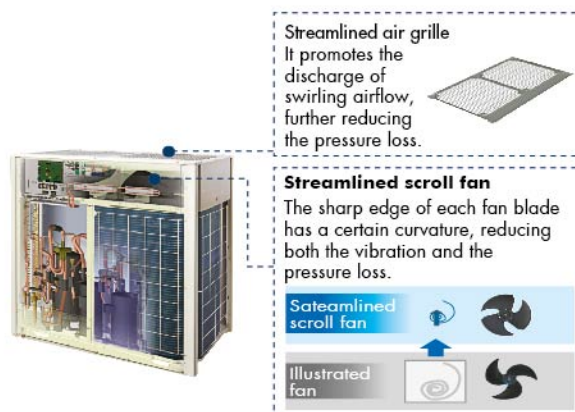


	6 HP	8 HP	10 HP	12 HP
VRV X	56	56	57	59

Sound level[dB(A)]

**Quiet night-time operation function**

Outdoor PCB automatically memorises the time when the peak outdoor temperature appears. It enables quiet operation mode after 8 h\*1 and returns to normal mode after it keeps this on for 9 h\*2.

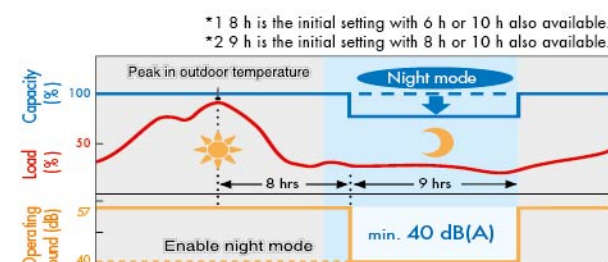


Notes:

- This function is available in field setting.
- The operating sound in quiet operation mode is the actual value measured by Daikin.
- The relationship of outdoor temperature (load) and time shown above is just an example.
- For 10 HP ODU.

**Ease of Maintenance**

VRV X series provides a maintenance feature\* which allows the shut down of indoor unit without shutting down the whole VRV system. This feature comes in handy during maintenance period as the remaining indoor units continue to operate.

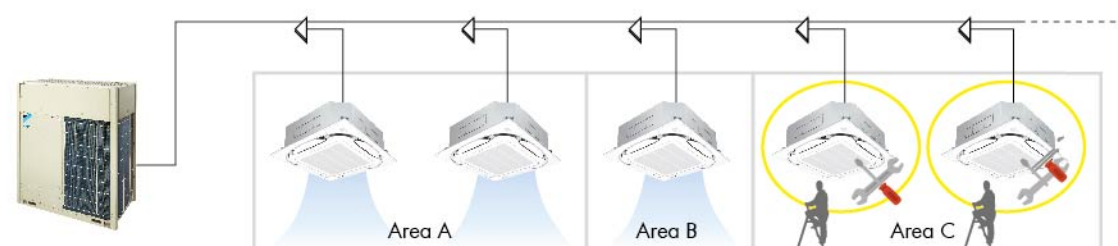

\* Field setting is required.  
This feature does not apply to residential indoor unit connection.  
For more information, please contact Daikin sales office.


## ● Automatic Refrigerant Charge Function ●

**Contribute to optimised operation efficiency,  
higher quality and easier installation**

**Optimised operation efficiency**

The automatic refrigerant charge function automatically determines the optimal amount of refrigerant to be charged.

This function prevents a capacity shortage or energy loss due to excessive or insufficient refrigerant.

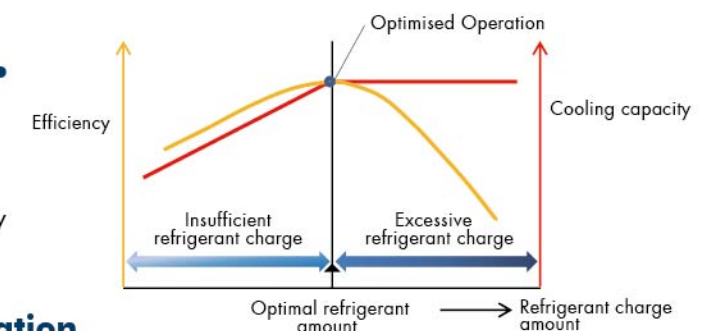**Higher quality and easier installation**

The automatic refrigerant charge function automates the charging of the proper refrigerant amount and the closing of shut-off valves with just one press of the switch after pre-charging. Simplified installation eliminates excessive and insufficient refrigerant charge amounts due to calculation mistakes and this has led to higher installation quality.

**Conventional**

- 1 Calculate necessary refrigerant amount from design drawing
- 2 Recalculate refrigerant amount from final installation drawing
- 3 Charge refrigerant
- 4 Regularly check refrigerant weight on weighing scale
- 5 Complete by manually closing valves when proper weight is reached

VRV X

- 1 Calculation of necessary refrigerant amount from design drawing
- 2 Pre-charge of refrigerant\*
- 3 Start of automatic refrigerant charge operation

Automatic completion with optimal refrigerant amount

Monitoring refrigerant charging is not required

No recalculation of charge amounts due to minor design changes at site

\*Pre-charge amount changes according to conditions, and there are cases when pre-charging is unnecessary.

**Multiple Advanced Features Ensuring More Accurate Test Operation And Stable System****Efficient automatic test operation**

Automatically checks the wirings between outdoor units and indoor units to confirm whether there is a defective wiring.

**Confirms and corrects the actual piping length.**

Automatically checks whether the stop valve in each outdoor unit is in normal status to ensure the smooth operation of air conditioning system.

**Automatic check**

Wiring check

Piping check

Stop valve check

**Free Phase Technology**

Phase reversal occurs in areas where power supply is frequent. At the time of power recovery, phase reversal may take place due to AC source and device may stop for PCB protection. By employing Free Phase technology, continued operation is achieved.




## X' TENDED RELIABILITY

Simplified commissioning  
and after-sales serviceFunction of information display  
by luminous digital tube


VRV X system utilises the 7-segment luminous digital tubes to display system operation information, enabling the operational state to be visually displayed whilst facilitating simplified commissioning and after-sales service.

7-segment digital display

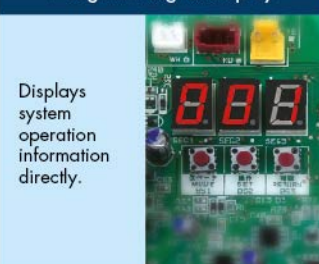

Displays system operation information directly.


Conventional LED display

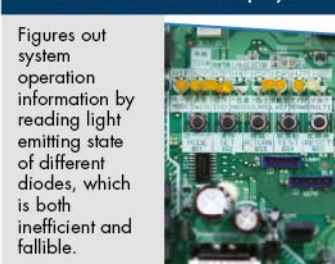

Figures out system operation information by reading light emitting state of different diodes, which is both inefficient and fallible.

## VRV configurator


- The VRV configurator is an advanced solution that allows for easy system configuration and commissioning.
- Less time is required on the roof configuring the outdoor unit.
- Multiple system at different sites can be managed in exactly the same way, thus offering simplified commissioning for key accounts.
- Initial setting on the outdoor unit can be easily retrieved.

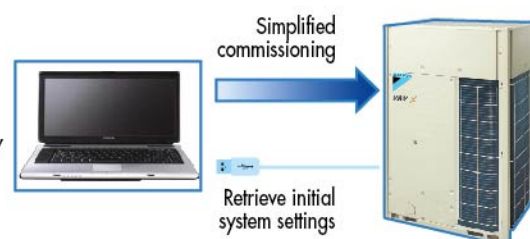

## Outdoor unit sequencing technology

## Automatic sequencing operation

During start-up, the Daikin VRV X unit sequencing operation will be automatically enabled to ensure balanced operation of each outdoor unit to improve longevity of equipment and stable operation.

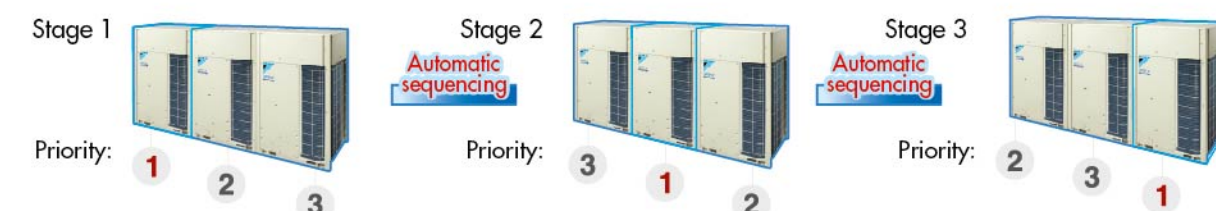Double back-up operation functions responding  
resiliently to various unexpected situations

## Double back-up operation functions

Daikin VRV X system boasts double back-up operation functions, which can secure the use of air conditioners in this area to the greatest extent by emergently enabling double back-up operation functions even if failure occurs in a set of air conditioning equipment. In the event of a failure, emergency operation can be enabled conveniently to allow the remaining system to operate in a limited fashion.

## Compressor back-up Operation Function

If malfunction occurs in a compressor...

Emergency operation can be easily set and enabled by the outdoor unit (for a single outdoor unit system RXQ16-20ARY6 : for Cooling only model RXYQ14-20ARY6: for Heat Pump model).



## Unit back-up operation function

If malfunction occurs in an outdoor unit, emergency operation can be conveniently set and enabled by the remote controller for indoor unit (for systems composed of two or more outdoor units).




## MORE FLEXIBLE SYSTEM DESIGN

More options for  
installation location

## Long piping length

The long piping length provides more design flexibility, which can match even large-sized buildings.

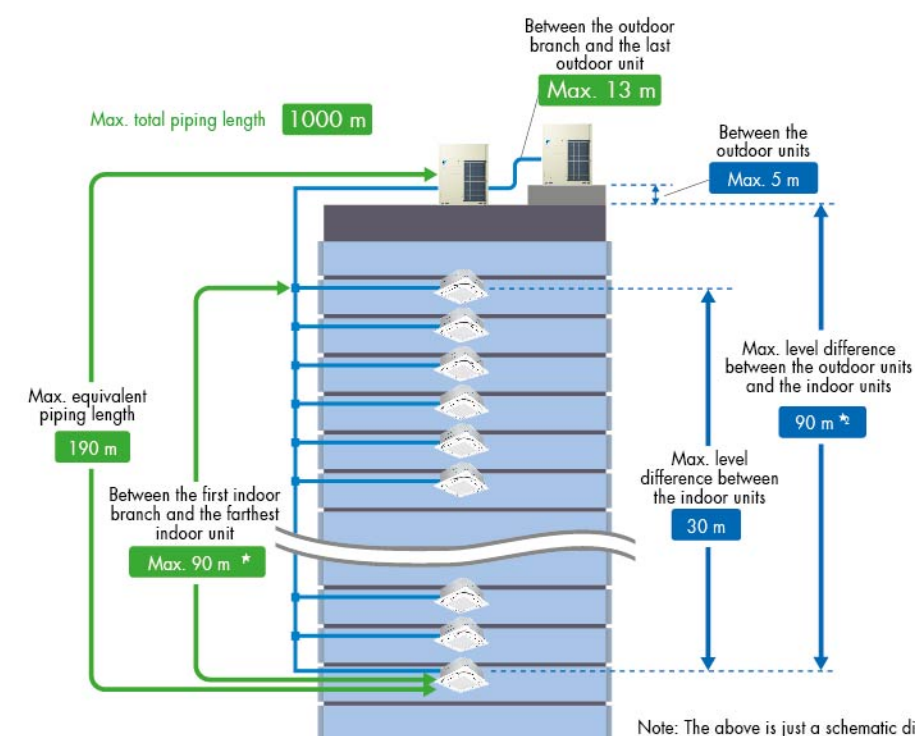

Maximum allowable piping length	Actual piping length (Equivalent)	165 m (190 m)
	Total piping length	1000 m
	Between the first indoor branch and the farthest indoor unit	90 m <sup>*1</sup>
Maximum allowable level difference	Between the outdoor branch and the last outdoor unit (Equivalent)	10 m (13 m)
	Between the outdoor units (Multiple use)	5 m
	Between the indoor units	30 m
	Between the outdoor units and the indoor units	90m <sup>*2</sup>

- No special requirements up to 40 m. The maximum actual piping length can be 90 m, depending on conditions. Various conditions and requirements have to be met to allow utilisation of 90 m piping length.
- When level differences are 50 m or more, the diameter of the main liquid piping size must be increased. If the outdoor unit is above the indoor unit, a dedicated setting on the outdoor unit is required.

## Connection ratio

Connection capacity  
at maximum is 200%.

Connection ratio  
50%–200%

$$\text{Connection ratio} = \frac{\text{Total capacity index of the indoor units}}{\text{Capacity index of the outdoor units}}$$

Conditions of VRV indoor unit connection capacity

Applicable VRV indoor units	FXDQ,	FXMQ-PB,	FXAQ, models	Other VRV indoor unit models <sup>*1</sup>
Single outdoor units	200%			200%
Double outdoor units				160%
Triple outdoor units				130%

<sup>\*1</sup> For the FXFQ25 and FXVQ models, maximum connection ratio is 130% for the entire range of outdoor units.

Note: If the operational capacity of indoor units is more than 130%, low airflow operation is enforced in all the indoor units.

<sup>\*</sup>Refer to page 65 for outdoor unit combination details.



## OUTDOOR UNIT LINE-UP



### High external static pressure

VRV X outdoor unit has achieved high external static pressure up to 78.4 Pa, ensuring the efficient heat dissipation and stable operation of equipment in either hierarchical or intensive arrangement.

**78.4 Pa**

- More options in the opening/angle of louver
- Outstanding heat dissipation effect in both hierarchical and intensive arrangement



### Outdoor Units

#### The outdoor unit capacity is up to 60 HP in increment of 2 HP.

- VRV X outdoor unit offers a higher capacity of up to 60 HP, responding to the needs of large-sized buildings.
- The single outdoor unit has only 2 different shapes and dimensions, not only simplifying the design process, but also bringing the system flexibility to a new level.
- With the outdoor unit capacity increased in increment of 2 HP, customers' needs can be precisely met.

#### Standard Type

##### Single Outdoor Units

6, 8, 10, 12 HP



RX(Y)Q6ARY6(1)  
RX(Y)Q8ARY6(1)  
RX(Y)Q10ARY6(1)  
RX(Y)Q12ARY6(1)

14, 16 HP



RX(Y)Q14ARY6(1)  
RX(Y)Q16ARY6(1)

18, 20 HP



RX(Y)Q18ARY6(1)  
RX(Y)Q20ARY6(1)

22, 24 HP



RX(Y)Q22ARY6(1)  
RX(Y)Q24ARY6(1)

26, 28, 30 HP



RX(Y)Q26ARY6(1)  
RX(Y)Q28ARY6(1)  
RX(Y)Q30ARY6(1)

##### Double Outdoor Units

32, 34, 36, 38, 40 HP



RX(Y)Q32ARY6(1)  
RX(Y)Q34ARY6(1)  
RX(Y)Q36ARY6(1)  
RX(Y)Q38ARY6(1)  
RX(Y)Q40ARY6(1)

##### Triple Outdoor Units

42, 44, 46, 48, 50, 52 HP



RX(Y)Q42ARY6(1)  
RX(Y)Q44ARY6(1)  
RX(Y)Q46ARY6(1)  
RX(Y)Q48ARY6(1)  
RX(Y)Q50ARY6(1)  
RX(Y)Q52ARY6(1)

54, 56, 58, 60 HP



RX(Y)Q54ARY6(1)  
RX(Y)Q56ARY6(1)  
RX(Y)Q58ARY6(1)  
RX(Y)Q60ARY6(1)

#### Line-up

HP	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
Cooling Only/ Heat Pump	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●



## INDOOR UNIT LINE-UP



## Enhanced Range Of Choices

A variety of VRV indoor units is enabled in one system, opening the door to stylish and quiet indoor units.

## VRV Indoor Units

16 types 77 models

Type	Model Name	Capacity Range Capacity Index	0.8 HP 20	1 HP 25	1.25 HP 31.25	1.6 HP 40	2 HP 50	2.5 HP 62.5	3 HP 71	3.2 HP 80	4 HP 100	5 HP 125	6 HP 140	7 HP 170	8 HP 200	10 HP 250	16 HP 400	20 HP 500
Ceiling Mounted Cassette Round Flow & Round Flow with Sensing (Optional)	<b>New</b> FXFSQ-ARV1 VRT Smart Control			●	●	●	●	●		●	●	●	●					
Ceiling Mounted Cassette (Compact Multi Flow)	<b>VRT</b> FXZQ-MVE		●	●	●	●	●											
Ceiling Mounted Cassette (Double Flow)	<b>New</b> FXCQ-AVM			●	●	●	●			●		●						
Slim Ceiling Mounted Duct	<b>New</b> FXDQ-PDVM (with drain pump) VRT Smart Control	 (700 mm width type)	●	●	●													
	<b>New</b> FXDQ-NDVM (with drain pump) VRT Smart Control	 (900/1,100 mm width type)				●	●	●										
Ceiling Mounted Duct	<b>New</b> FXMQ-P VRT Smart Control		●	●	●	●	●			●	●	●	●					
	<b>VRT</b> FXMQ-NVE													●	●	●		
Mid Static Ceiling Mounted Duct	<b>VRT</b> FXMQ-ARV1 <b>New</b>					●	●	●	●	●	●							
Ceiling Suspended	<b>VRT</b> FXHQ-MAVE			●			●				●							
4-Way Flow Ceiling Suspended	<b>VRT</b> FXUQ-AVEB							●			●							
Wall Mounted	<b>New</b> FXAQ-ARVE6 VRT Smart Control		●	●	●	●	●											
Floor Standing	<b>VRT</b> FXLQ-MAVE			●			●	●										
Concealed Floor Standing	<b>VRT</b> FXNQ-MAVE			●			●	●										

At Daikin, we offer a wide range of indoor units, including both VRV and residential models, responding to a variety of needs of our customers that require air conditioning solutions.

## VRV Indoor Units

Ceiling Mounted Cassette  
Round Flow & Round Flow  
with Sensing (Optional)

FXFSQ-ARV1

**New**

Presence of people and floor  
temperature can be detected to  
provide comfort and energy savings



Ceiling Mounted Cassette  
(Compact Multi Flow) Type

FXZQ-MVE



Quiet, compact and designed for  
users comfort



Ceiling Mounted Cassette  
(Double Flow) Type

FXCQ-AVM

**New**

Add finishing touch to your ceiling,  
with enhancing function and design



Slim Ceiling Mounted Duct  
Type

FXDQ-PDV



FXDQ-NDV



Slim design, quietness and  
static pressure switching



Ceiling Mounted Duct Type

FXMQ-P



FXMQ-ARV1



FXMQ-NVE

High/Mid external static pressure  
allows flexible installations



4-Way Flow Ceiling  
Suspended Type

FXUQ-AVEB



This slim and stylish indoor unit  
achieves optimum air distribution,  
and can be installed without the  
need for ceiling cavity.



Ceiling Suspended Type

FXHQ-MAVE



Slim body with quiet and wide  
airflow



Floor Standing Type

FXLQ-MAVE



Concealed Floor Standing  
Type

FXNQ-MAVE



Suitable for perimeter zone air conditioning





## INDOOR UNIT LINE-UP



## Wall Mounted Type

FXAQ-ARVE6

New



Stylish flat panel design  
harmonised with your interior  
décor



## VRV Indoor Units

## Ceiling Mounted Cassette Round Flow &amp; Round Flow with Sensing (Optional)

FXFSQ25A / FXFSQ32A / FXFSQ40A /  
FXFSQ50A / FXFSQ63A / FXFSQ80A /  
FXFSQ100A / FXFSQ125A /  
FXFSQ140A


New

VRT Smart Control



**Round flow  
with sensing**  
(Optional)

**Presence of people and floor temperature can be  
detected to provide comfort and energy savings**

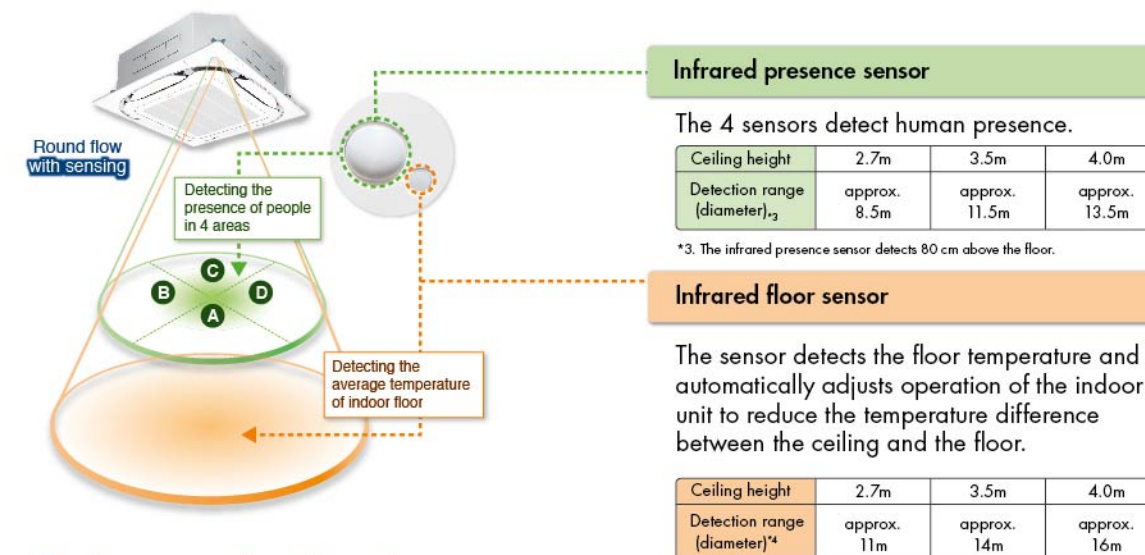Dual sensors<sup>\*1</sup>


## Various sensing functions

Sensing sensor mode<sup>\*5\*6</sup>

## Sensing sensor low mode (default: OFF)

When there are no people in a room, the set temperature is shifted automatically.

The system automatically saves energy by detecting whether or not the room is occupied. The set temperature is shifted automatically if the room is unoccupied.

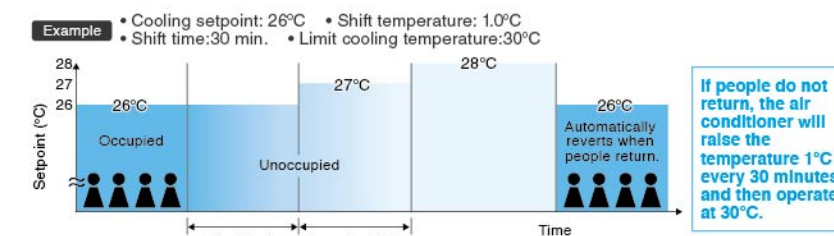

Shift temperature and time can be selected from 0.5 to 4°C in 0.5°C increments and 15, 30, 45, 60, 90 or 120 minutes respectively with remote controller.

<sup>\*1</sup> Applicable when sensing panel (BYCQ140EEF6/BYCQ125EEK) is installed.

<sup>\*5</sup> These functions are not available when using the group control system.

<sup>\*6</sup> User can set these functions with remote controller.

Operation is reduced in places where there are no people.





## INDOOR UNIT LINE-UP



## VRV Indoor Units

## Sensing sensor stop mode (default: OFF)


When there are no people in a room, the system stops automatically.\*7

The system automatically saves energy by detecting whether or not the room is occupied.

Based on preset user conditions, the system automatically stops operation if the room is unoccupied.

Absent stop time can be selected from 1 to 24 hrs in 1 hr increments with remote controller.

\*7. Please note that upon re-entering the room, air conditioner will not switch on automatically.

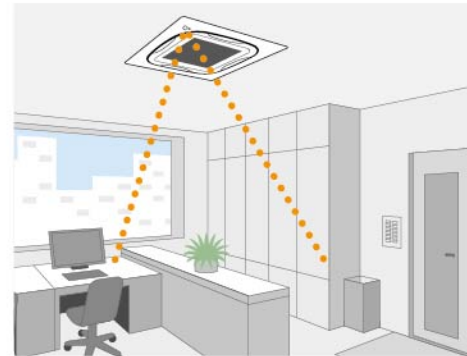

## Auto airflow function\*8


\*8. Airflow direction should be set to "Auto".

**New** Direct Airflow (default: OFF)

Cooling


Dry

When human presence is not detected

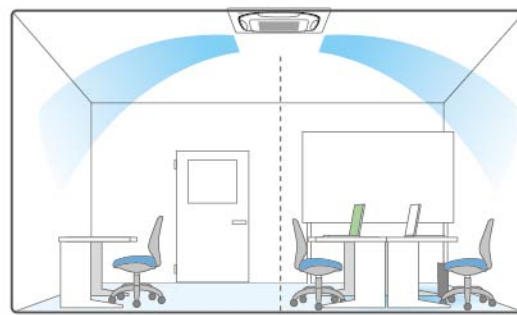

Optimal air direction by "Auto"

When human presence is detected

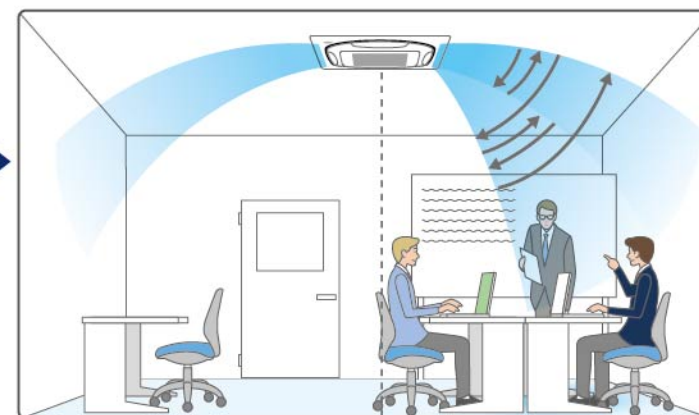

Optimal air direction by "Auto"

Swing (narrow)

- With Auto airflow direction mode, flaps are controlled to deliver optimal airflow when the room is unoccupied.



- When human is detected, air direction is set to "Swing (narrow)" to deliver cool air to users.


## Comfort and energy saving preventing over cooling\*9

\*9. Airflow direction and airflow rate should be set to "Auto".

## Floor temperature is detected and over cooling prevented.


Cooling

Without sensing function

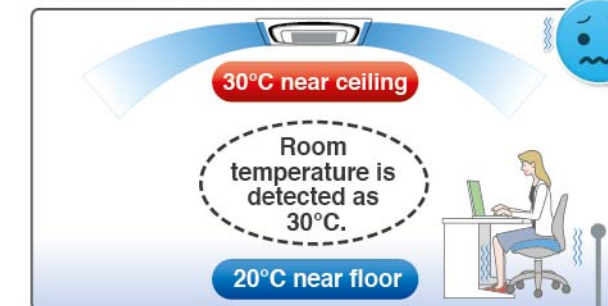

Area around feet gets too cold because air conditioner continues until the temperature near the ceiling reaches the set temperature.

With sensing function

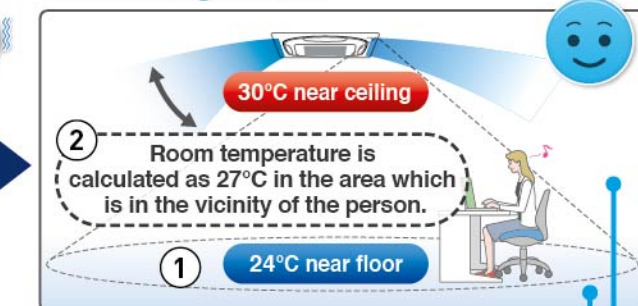

The floor temperature, which is lower than near the ceiling, is detected.


Automatic control using the temperature near the person as the room temperature.

Energy savings

The temperature near the person is automatically calculated by detecting the temperature of the floor. Energy is saved, because the area around the feet does not get too cold.


**New** Circulation Airflow


The illustration shows typical airflow. Effectiveness may differ according to room conditions, room size and distance to walls.

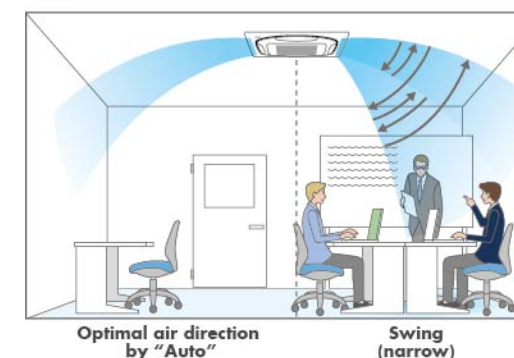**New** Direct Airflow


Optimal air direction by "Auto"

Swing (narrow)

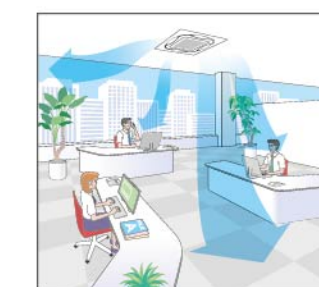**Individual Airflow Direction Control**


The illustration shows typical airflow.



## INDOOR UNIT LINE-UP



## Circulation Air Flow



\*1. Applicable when wired remote controller BRC1E62 is used.  
\*2. Not applicable when using individual airflow direction control.

Circulation airflow cools the entire room to deliver comfort that never feels cold.


## During 2-way horizontal flow



Comfort to the entire room with even temperatures and no cold air pockets at floor level

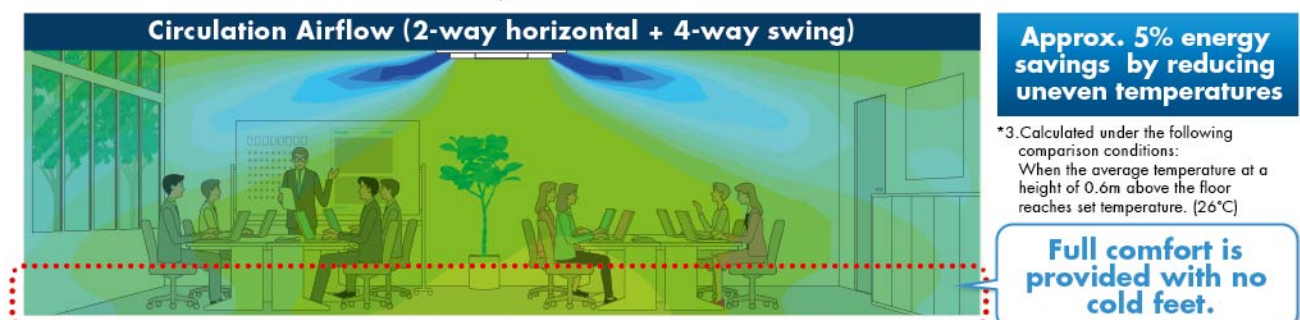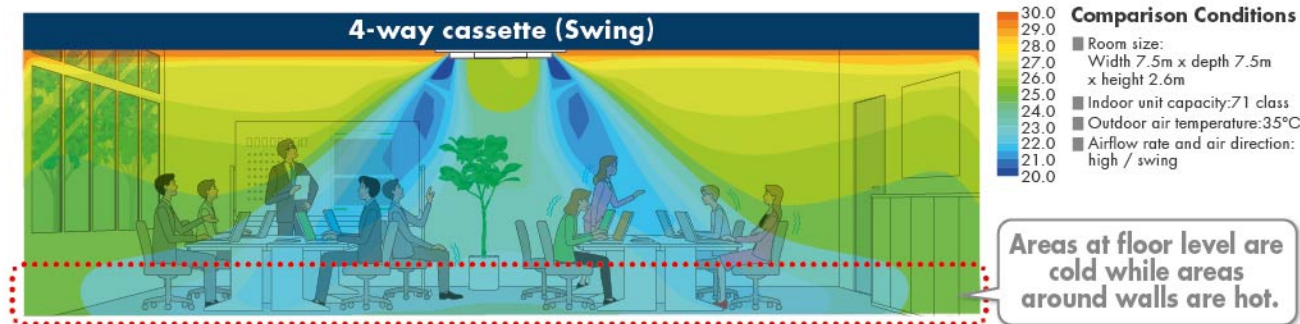

## Configurations of Circulation Airflow

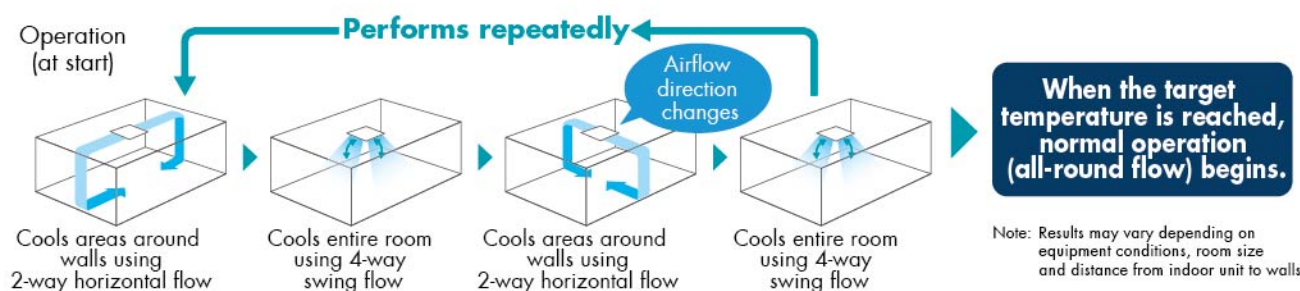


## Three technologies that achieved circulation airflow

Flow-out is straight, horizontally and strong, so the air travels far and even reaches the wall from which it falls to the floor. This approach and technology makes circulation airflow possible.

## 1 Use of new wide flaps (Straight)

Compared to conventional models, the new wide flap increases straightness of the airflow, so coverage is approximately doubled.

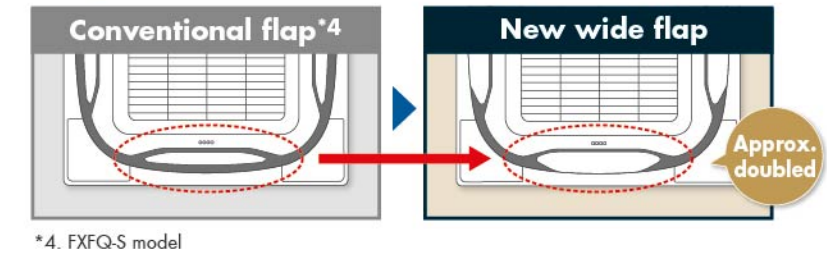


## New wide flap construction inhibits ceiling dirt and grime

By tapering both flap ends, the airflow that causes dirty ceilings is directed downward.




## 2 Optimising airflow angle (Horizontally)

Even with the flap angle raised, a sufficient airflow route is maintained to realize a more horizontal airflow angle.

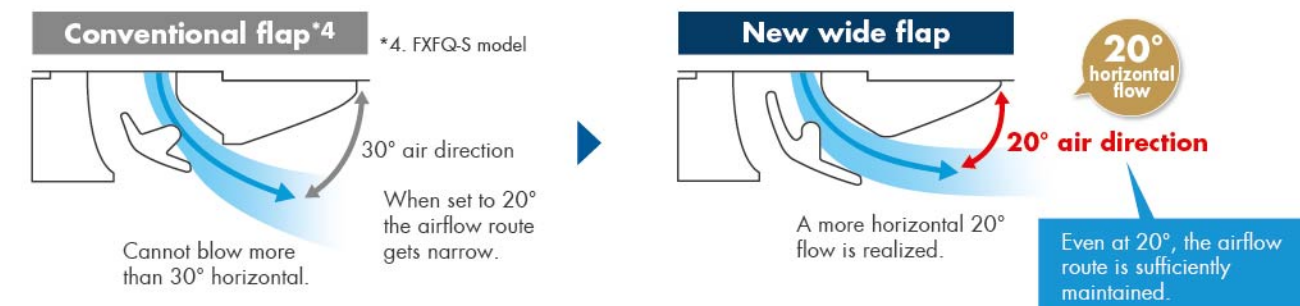

## 3 Increased velocity in 2-way flow (Strongly)

Velocity increased by making 2-way flow. Powerful airflow was realized.

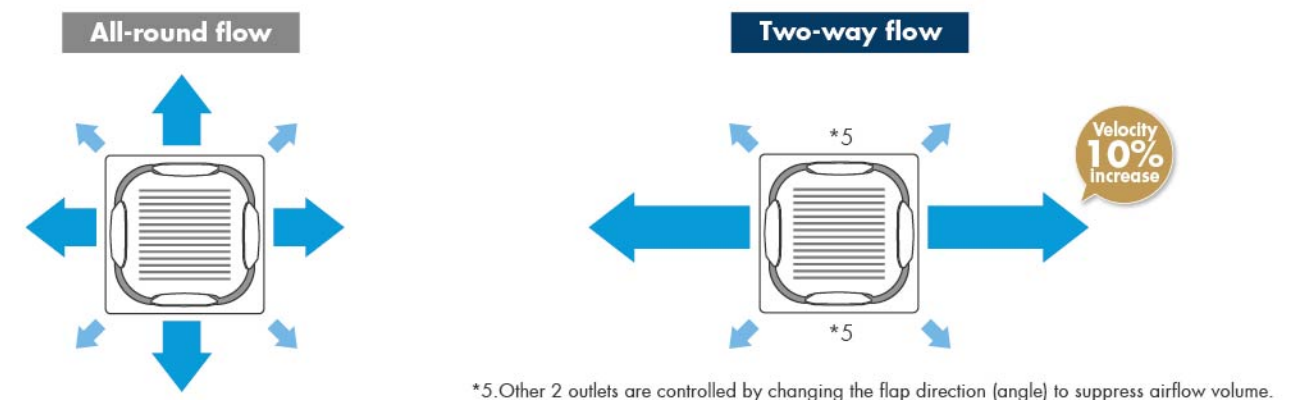



## INDOOR UNIT LINE-UP




\*1. Applicable when wired remote controller BRC1E63 is used.



### Comfortable air conditioning for all room layouts and conditions

Airflow direction can be individually adjusted for each air discharge outlet to deliver optimal air distribution.

Easy setting is possible with a wired remote controller.



There are identification marks near the air outlets.

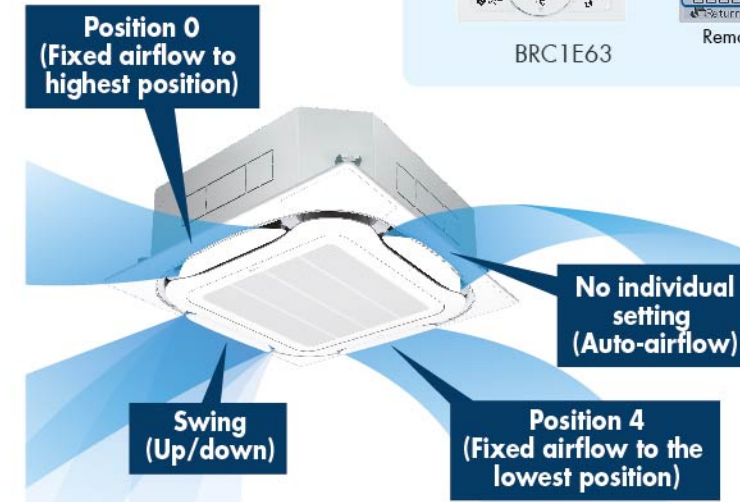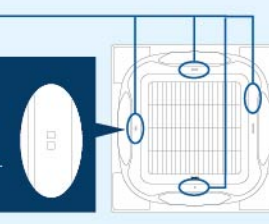



#### Individual airflow settings

- No individual setting (Auto airflow)
- Position 0 (Highest point)
- Position 1
- Position 2
- Position 3
- Position 4 (Lowest point)
- Swing



Individual settings are possible as stated above.

When individual airflow is selected, airflow direction can be adjusted to room layout.

#### For offices

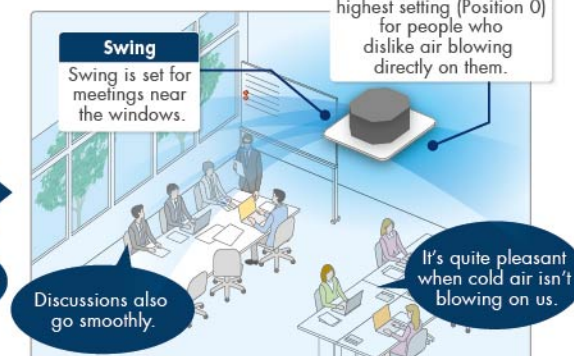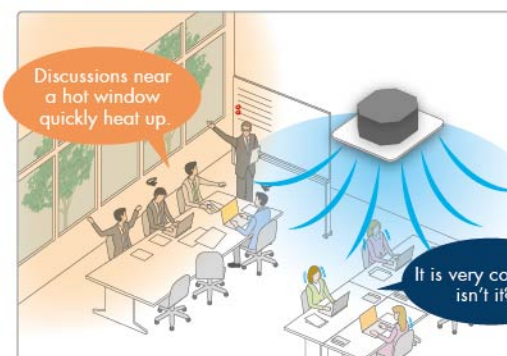

#### For shops and restaurant

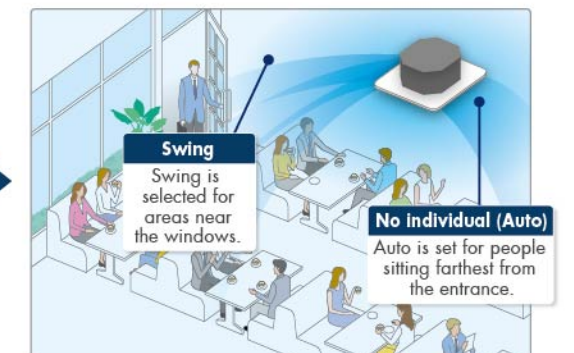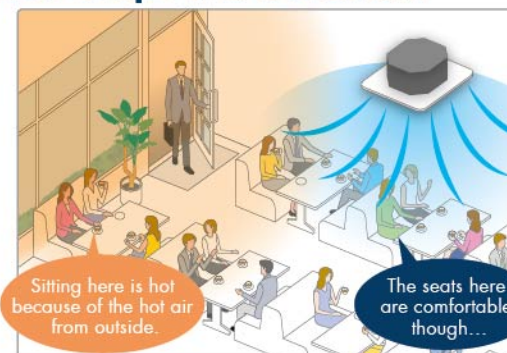

#### New Wide variety of decoration panels (Option)

- Designer choice has been given a boost with the increase in number of new types of decoration panels.



Standard panel with sensing



Designer panel<sup>\*2</sup>



Standard panel<sup>\*2</sup>



#### New Designer panel (Option)



#### Decoration Panel Line-up (Option)



Standard panel<sup>\*1</sup>  
BYCQ125EAF9 (Fresh White)



Standard panel<sup>\*1</sup>  
BYCQ125EAK (Black)



Designer panel<sup>\*1</sup>  
BYCQ125EAPF (Fresh White)



Sensing panel  
BYCQ140EEF6 (Fresh White)



Sensing panel  
BYCQ125EEK (Black)


\*1. Sensing function is applicable when sensing panel is installed.

#### New Auto grille panel (Option)\*1

- Clogged filters strain performance of the indoor unit and may result in breakdowns. Impeded airflow through the filter also lowers operational efficiency, which increases electricity bills. With the auto grille, anyone can easily clean the filter, which translates to lower maintenance cost and longer life of the air conditioner.
- With the auto grille panel, motorised raising and lowering allows suction panel and air filter cleaning to be carried out without the need for a step ladder.

A dedicated wireless remote controller is supplied with the auto grille panel.

- For these situations recommended
- Where the air is dusty and likely to soil the air conditioner.
  - Where simple and quick filter and grille cleaning is a worthwhile benefit.

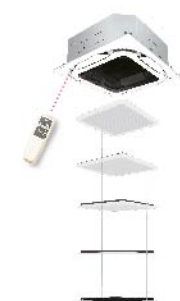

Auto grille panel<sup>\*1</sup>  
BYCQ125EASF (Fresh White)




## INDOOR UNIT LINE-UP





### Comfortable airflow


- Indoor unit offers 360° airflow discharges air in all directions with more uniform temperature distribution.



There are areas of uneven temperature.

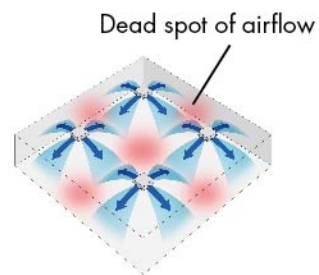


There are much fewer areas of uneven temperature.

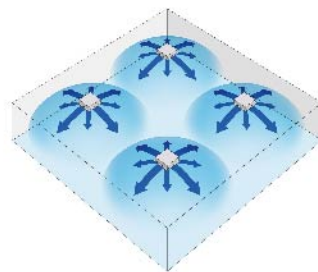

### Easy installation

- Drain pump is equipped as a standard accessory with a 850 mm lift.

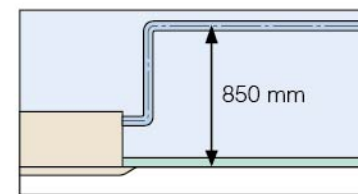


### Easy maintenance

- Internal hygiene can be easily checked without removing the whole panel. Simply opening the suction panel allows the internal drain pan to be checked.

**New**

- 24 mm diameter drain outlet


The drain outlet allows insertion of a finger or dental mirror for inspection of the internal cleanliness of the drain pan. Removal of the suction panel enables access.

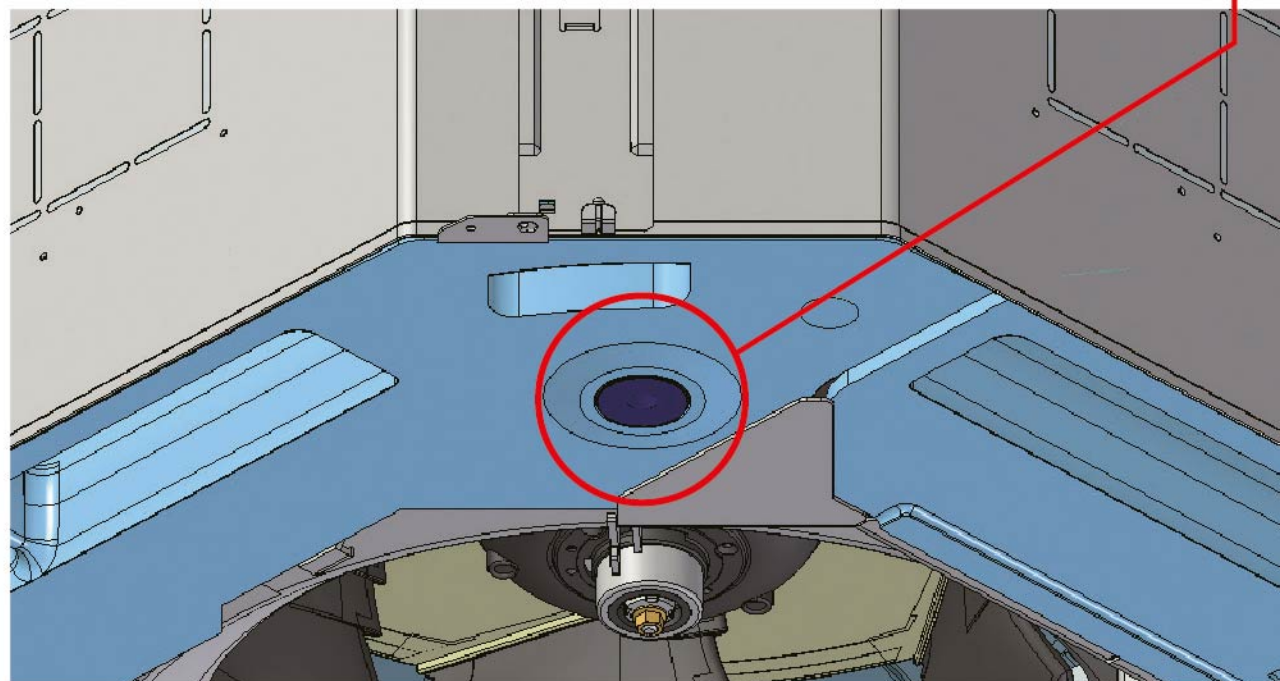


### Example of airflow patterns

All-round flow is available, as well as 2-way to 4-way flows, so you can choose the most suitable airflow pattern depending on location or room layout.


All-round flow

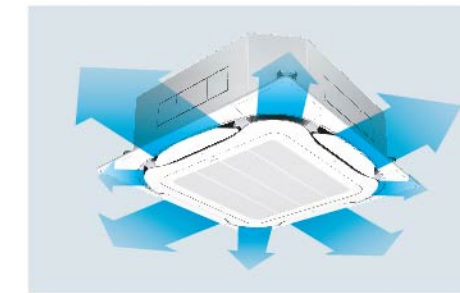


4-way flow

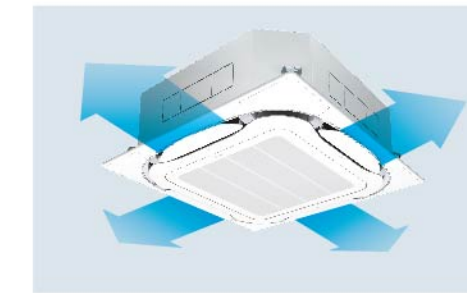

3-way flow

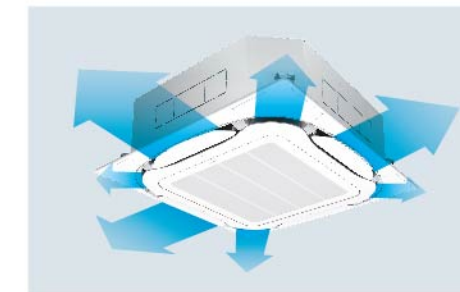

L-shaped 2-way flow

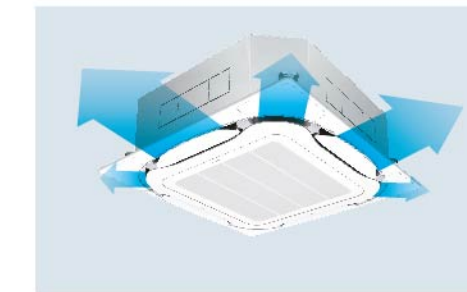

Note: Whatever the discharge direction, the same type of panel is used. If installing for other than all-round flow, an air discharge outlet sealing material (option) must be used to close each unused outlet.

All-round flow is available, as well as 2-way to 4-way flows, so you can choose the most suitable airflow pattern depending on location or room layout.

- An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.

(The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)

- The air filter has an anti-mould and antibacterial treatment that prevents the growth of mould generated from dust or moisture that may adhere to the filter.

**New**

- Control of the airflow rate can be selected from 5-step control and Auto.





## INDOOR UNIT LINE-UP



## VRV Indoor Units

## Ceiling Mounted Cassette (Compact Multi Flow) Type

FXZQ20M / FXZQ25M / FXZQ32M  
FXZQ40M / FXZQ50M



## Quiet, compact and designed for users comfort


- Dimensions correspond with 600 mm X 600 mm architectural module ceiling design specifications.

Low operation sound level (dB(A))				
FXZQ-M	20/25	32	40	50
Sound level (H/L)	30/25	32/26	36/28	41/33


## Comfortable airflow

## 1 Wide discharge angle: 0° to 60°

- Auto swing

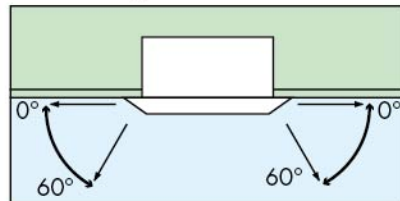


- Fixed angles: 5 levels

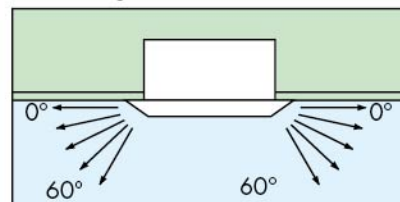

\*Angles can be also set on site to prevent drafts (0°-35°) or soiling of the ceiling (25°-60°), other than standard setting (0°-60°).


## 2 2-, 3- and 4-way airflow patterns are available, enabling installation in the corner of a room.

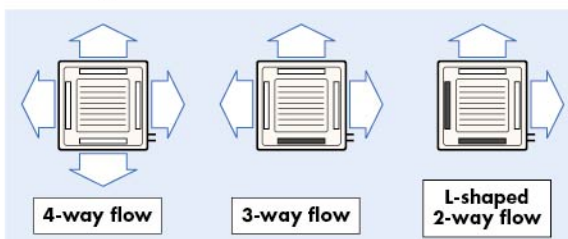

\*For 3-way or 2-way flow installation, the sealing member for air discharge outlet (option) must be used to close each unused outlet.



Drain pump is equipped as standard accessory with 750 mm lift.

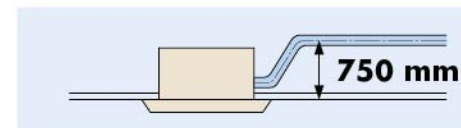

## VRV Indoor Units

## Ceiling Mounted Cassette (Double Flow) Type

FXCQ25AVM / FXCQ32AVM / FXCQ40AVM /  
FXCQ50AVM / FXCQ63AVM / FXCQ80AVM /  
FXCQ125AVM



## Add finishing touch to your ceiling, with enhancing function and design.

Stylish unit blends easily with any interior. Integrated ceiling surface with sophisticated panel design with the adoption of flat flap. Add finishing touch to your ceiling, with enhancing function and design.

- Individual airflow direction control (Unavailable during automatic airflow mode, airflow angle: configurable from 0 to 4 swing positions.)

## Individual flap control



The flat flaps close entirely when the unit is not operating and there are no air intake grilles visible.


- Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump.

## Enhanced functions from various aspects such as maintenance

- Check contamination in drain pan by simply remove suction grille and panel.
- The flap parts are easy to clean because it is hard to condensate and get dirty.
- Equipped with long life filter which requires only 1-year maintenance interval.
- Adjuster pockets mount at four corners of the unit enable to adjust the main unit without removing the panel.
- Drain pump is equipped as standard accessory with 850 mm lift.




Adjuster Pocket

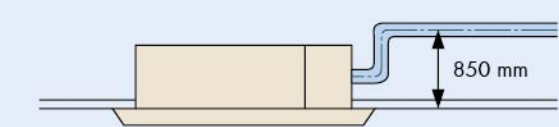

- An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.

(The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)

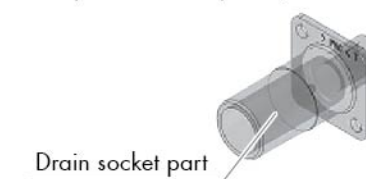

Drain socket part

- Easy visual inspection of drainage through the transparent body drain socket.



## INDOOR UNIT LINE-UP



## VRV Indoor Units

## Slim Ceiling Mounted Duct Type


## Slim design, quietness and static pressure switching

## Suited to use in drop-ceilings

## FXDQ20PD / FXDQ25PD / FXDQ32PD

- Only 700 mm in width and 23 kg in weight, this model is suitable for installation in limited spaces like drop-ceilings in hotels.

Great for hotel use

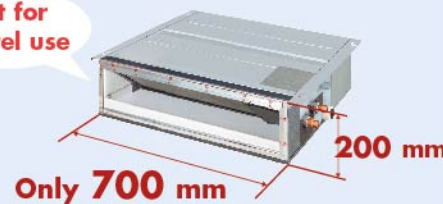

- Control of the airflow rate has been improved from 2-step to 3-step control.

Low operation sound level (dB(A))		20/25/32	40	50	63
FXDQ-PD/ND	Sound level (HH/H/L)	33/31/29	34/32/30	35/33/31	36/34/32


\* The values of operation sound level represent those for rear-suction operation. Sound level values for bottom-suction operation can be obtained by adding 5 dB(A).

\* Values are based on the following conditions:  
FXDQ-PD: external static pressure of 10 Pa; FXDQ-ND: external static pressure of 15 Pa.




## FXDQ40ND / FXDQ50ND / FXDQ63ND

- Only 200 mm in height, this model can be installed in rooms with as little as 240 mm depth between the drop-ceiling and ceiling slab.

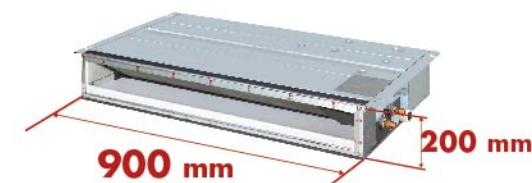


\* 1,100 mm in width for the FXDQ63ND model.

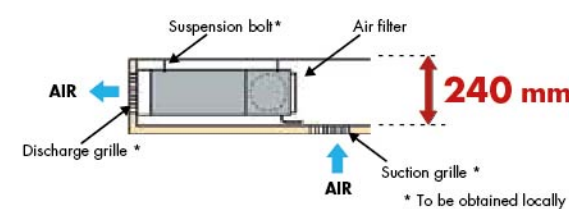

- External static pressure selectable by remote controller switching makes this indoor unit a very comfortable and flexible model.

10 Pa-30 Pa/factory set: 10 Pa for FXDQ-PD models.  
15 Pa-44 Pa/factory set: 15 Pa for FXDQ-ND models.

- FXDQ-PD and FXDQ-ND models are available with a drain pump as a standard accessory.  
FXDQ-PD/NDVE: with a drain pump (750 mm lift) as a standard accessory

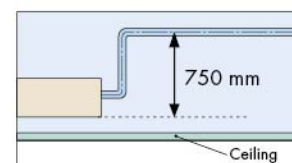

## VRV Indoor Units

## High Static Pressure Ceiling Mounted Duct Type

FXMQ20P / FXMQ25P / FXMQ32P  
FXMQ40P / FXMQ50P / FXMQ63P  
FXMQ80P / FXMQ100P / FXMQ125P  
FXMQ140P



## High static pressure allows for flexible duct design

- A DC fan motor increases the external static pressure capacity range to include middle to high static pressures, increasing design flexibility.

30 Pa-100 Pa for FXMQ20P-32P


30 Pa-160 Pa for FXMQ40P

50 Pa-200 Pa for FXMQ50P-125P

50 Pa-140 Pa for FXMQ140P

All models are only 300 mm in height, an improvement over the 390 mm height of conventional models. The weight of the FXMQ40P has been reduced from 44 kg to 28 kg.

Drain pump is equipped as standard accessory with 700 mm lift.



Control of the airflow rate has been improved from 2-step to 3-step control.

Low operation sound level (dB(A))		20/25	32	40	50	63	80/100	125	140
FXMQ-P	Sound level (HH/H/L)	33/31/29	34/32/30	35/33/31	36/34/32	37/35/33	38/36/34	39/37/35	40/38/36

## Energy-efficient

- The adopted DC fan motor is much more efficient than the conventional AC motor, yielding an approximate 20% decrease in energy consumption (FXMQ125P).

FXMQ170N/FXMQ200N  
FXMQ250N

## Simplified Static Pressure Control

External static pressure can be easily adjusted using a change-over switch inside the electrical box to meet the resistance in the duct system.



## Improved ease of installation

- Airflow rate can be controlled using a remote controller during test operations. With the conventional model, the airflow rate was controlled from the PC board. It is automatically adjusted to the range between approximately  $\pm 10\%$  of the rated HH tap airflow for FXMQ20P-125P.

## Improved ease of maintenance

- The drain pan can be detached for easy cleaning. An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.



## INDOOR UNIT LINE-UP



## VRV Indoor Units

## Mid Static Pressure Ceiling Mounted Duct Type

FXMQ40A / FXMQ50A / FXMQ63A  
FXMQ80A / FXMQ100A




## Mid static pressure allows for flexible duct design

- AC fan motor is installed to suit applications where external static pressure is required at nominal capacity.  
30 Pa-50 Pa for FXMQ40-80ARV1  
30 Pa-60 Pa for FXMQ100ARV1

All models are only 300 mm in height, an improvement over the 390 mm height of conventional models. The weight of the FXMQ40P has been reduced from 44 kg to 28 kg.

Drain pump is equipped as standard accessory with 700 mm lift.



## High airflow rate

Airflow rate is optimised to meet wider spectrum of airflow requirements.

Low operation sound level		(dB(A))				
FXMQ-A	40	50	63	80	100	
Sound level (H/L)	39/37	41/39	42/40	43/41	44/42	

## Improved ease of maintenance

- The drain pan can be detached for easy cleaning. An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.



## VRV Indoor Units

## Ceiling Suspended Type


FXHQ32MA / FXHQ63MA /  
FXHQ100MA



## Slim body with quiet and wide airflow

## Adoption of QUIET STREAM FAN


Uses the quiet stream fan and many more advanced technologies.

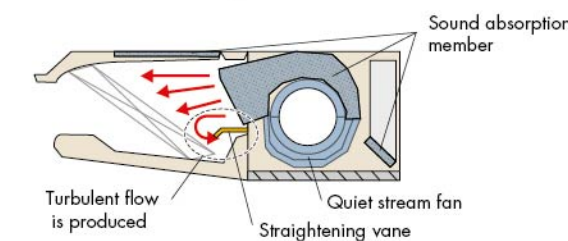


Low operation sound level		(dB(A))		
FXHQ-MA	32	63	100	
Sound level (H/L)	36/31	39/34	45/37	

## Installation is easy

- Drain pump kit (optional) can be easily incorporated.

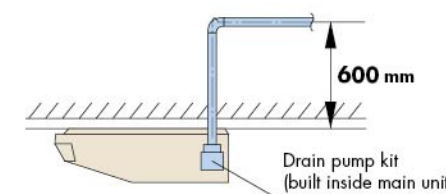


- Wide air discharge openings produce a spreading 100° airflow.

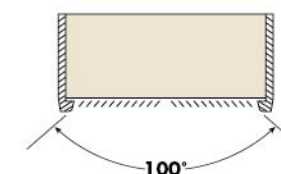

## Maintenance is easy

- Non-dew flap with no implanted bristles

Bristle-free flap minimises contamination and makes cleaning simpler.

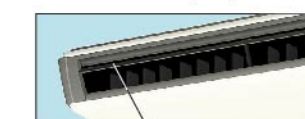

Non-dew Flap

- Easy-to-clean flat design
- Maintenance is easier because everything can be performed from below the unit.
- A long-life filter is equipped as standard accessory.  
\* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m<sup>3</sup>



## INDOOR UNIT LINE-UP



## VRV Indoor Units

## Wall Mounted Type

FXAQ20A / FXAQ25A  
FXAQ32A / FXAQ40A  
FXAQ50A / FXAQ63A

New

VRT Smart Control



**Stylish flat panel design harmonised  
with your interior décor**



- Stylish flat panel design creates a graceful harmony that enhances any interior space.
- Flat panel can be cleaned with only the single pass of a cloth across their smooth surface.
- Vertical auto-swing realises efficiency of air distribution. The louvre closes automatically when the unit stops.

## VRV Indoor Units


## Floor Standing Type

FXLQ32MA / FXLQ50MA  
FXLQ63MA



**Suitable for perimeter zone air conditioning**

- Floor Standing types can be hung on the wall for easier cleaning. Running the piping from the back allows the unit to be hung on walls. Cleaning under the unit, where dust tends to accumulate, is considerably easier.
- The adoption of a fibre-less discharge grille, featuring an original design to prevent condensation, also helps prevent staining and makes cleaning easier.
- A long-life filter is equipped as standard accessory.  
\* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m<sup>3</sup>

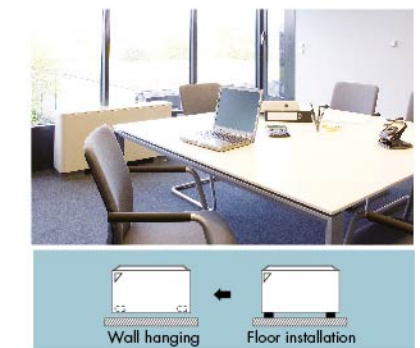

## Concealed Floor Standing Type


FXNQ32MA / FXNQ50MA  
FXNQ63MA



**Designed to be concealed in the perimeter skirting-wall**

- The unit is concealed in the skirting-wall of the perimeter, that creates a classy interior design.
- The connecting port faces downwards, greatly facilitating on-site piping work.
- A long-life filter is equipped as a standard accessory.

\* 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m<sup>3</sup>

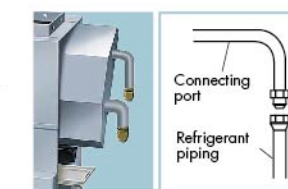

\* Applies also to Floor Standing type [FXLQ-MA].





## INDOOR UNIT LINE-UP



## VRV Indoor Units


## 4-Way Flow Ceiling Suspended Type

FXUQ71A / FXUQ100A



**This slim and stylish indoor unit achieves optimum air distribution and can be installed without a ceiling cavity.**

- Unit body and suction panel adopted round shapes and realized a slim appearance design. The unit can be used for various locations such as the ceilings with no cavity and bore ceilings.
- Flaps close automatically when the unit stops, which gives a simple appearance.
- Unified slim height of 198 mm for all models that gives the unified impression even when models with different capacities are installed in the same area.

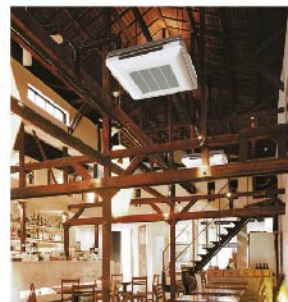


- Built-in electronic expansion valve eliminates the need for a BEV unit, which improves flexibility of installation.




- With adoption of the individual flap control, airflow direction adjustment can be individually set for each air outlet. Five directions of airflow and auto-swing can be selected with wired remote controller BRC1E62, which realizes the optimum air distribution.

## Individual airflow direction example case

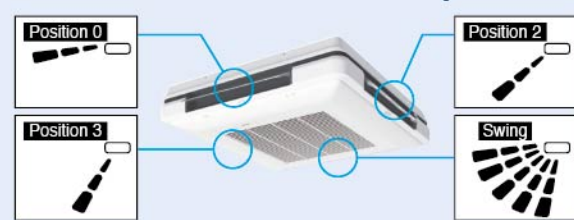

- Control of the airflow rate has been improved from 2-step to 3-step control. Auto airflow rate control can be selected with wired remote controller BRC1E62.
- Energy efficiency has been improved, thanks to the adoption of new heat exchanger with smaller tubes, DC fan motor and DC drain pump motor.
- Drain pump is equipped as a standard accessory and the lift height has been improved from 500 mm to 600 mm.
- Depending on the installation site requirements or room conditions, 2-way, 3-way and 4-way discharge patterns are available.

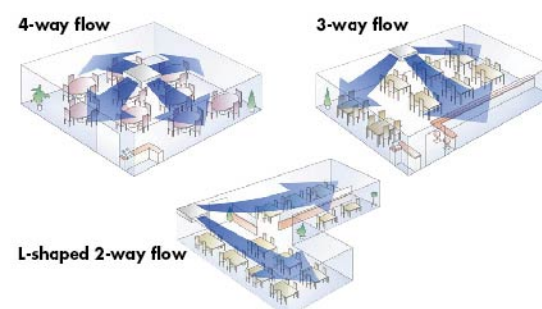

# VRV X

## SPECIFICATIONS



## SPECIFICATIONS



## VRV Indoor Units

## Ceiling Mounted Cassette Round Flow &amp; Round Flow with Sensing (Optional)



MODEL		FXFSQ25ARV1	FXFSQ32ARV1	FXFSQ40ARV1	FXFSQ50ARV1	FXFSQ63ARV1	FXFSQ80ARV1	FXFSQ100ARV1	FXFSQ125ARV1	FXFSQ140ARV1	
Power supply		1-phase, 220-240V, 50Hz									
Cooling capacity	Btu/h	9,600	12,300	15,400	19,100	24,200	30,700	38,200	47,800	54,600	
	kW	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	16.0	
Heating capacity	Btu/h	10,900	13,600	17,100	21,500	27,300	34,100	42,700	54,600	54,600	
	kW	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	16.0	
Casing		Galvanised steel plate									
Airflow rate (H/HM/M/ML/L)	m <sup>3</sup> /min	13/12.5/11.5/11/10	17/13.5/12.5/12/11	23/20.5/19/14.5/11	23.5/21/20/16/13.5	24.5/22/20.5/20/15	33.5/30.5/27/23.5/21	34.5/31.5/28.5/25.5/23	35.5/32.5/29.5/26.5/23		
	cfm	459/441/406/388/353	600/477/441/424/388	812/724/671/512/388	830/742/706/565/477	865/777/724/706/530	1,181/1,077/954/830/742	1,218/1,112/1,036/931/812	1,254/1,148/1,042/936/812		
Sound level (H/HM/M/ML/L)	dB(A)	30/29.5/28.5/28/27	35/29.5/29/28/27	38/35/34.5/29.5/27	38/36/35.5/31.5/28	39/37/36/35.5/31	44/41/38/35/33	45/42.5/39.5/37/35	46/43.5/40.5/38/35		
Dimensions (HxWxD)	mm	256x840x840									
Machine weight		kg	19			22		25		26	
Piping connections	Liquid (Flare)	mm	ø 6.4			ø 9.5					
	Gas (Flare)		ø 12.7			ø 15.9					
	Drain		VP25 (External Dia, 32/Internal Dia, 25)								
Standard Panel (Non Sensing) (White)	Model	BYCQ125EAF9 (Fresh White)									
	Dimensions (HxWxD)	mm	50x950x950								
	Weight	kg	5.5								
Sensing Panel (White)	Model	BYCQ140EEF6 (Fresh White)									
	Dimensions (HxWxD)	mm	50x950x950								
	Weight	kg	5.5								

Note: Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Decoration Panel (Option)

			Round Flow Type	
			FXFSQ-A	
Standard panel	Model		BYCQ125EAF9 (Fresh White) / BYCQ125EAK (Black)	
	Dimensions (HxWxD)	mm	50x950x950	
	Weight	kg	5.5	
Sensing panel	Model		BYCQ140EEF6 (Fresh White) / BYCQ125EEK	
	Dimensions (HxWxD)	mm	50x950x950	
	Weight	kg	5.5	
Designer panel	Model		BYCQ125EAPF (Fresh White)	
	Dimensions (HxWxD)	mm	97x950x950	
	Weight	kg	6.5	
Auto grille panel	Model		BYCQ125EASF (Fresh White)	
	Dimensions (HxWxD)	mm	105x950x950	
	Weight	kg	8	



Standard panel  
BYCQ125EAF9 (Fresh White)



Standard panel  
BYCQ125EAK (Black)



Designer panel  
BYCQ125EAPF (Fresh White)



Sensing panel  
BYCQ140EEF6 (Fresh White)



Sensing panel  
BYCQ125EEK (Black)



Auto grille panel<sup>2</sup>  
BYCQ125EASF (Fresh White)

Note: When opting Black panel, wireless remote controller model will be BRC7M634K

## Ceiling Mounted Cassette (Compact Multi-Flow) Type



MODEL		FXZQ20MVE9	FXZQ25MVE9	FXZQ32MVE9	FXZQ40MVE9	FXZQ50MVE9
Power supply		1-phase, 220-240 V/220 V, 50 Hz				
Cooling capacity	Btu/h	7,500	9,600	12,300	15,400	19,100
	kW	2.2	2.8	3.6	4.5	5.6
Heating capacity	Btu/h	8,500	10,900	13,600	17,100	21,500
	kW	2.5	3.2	4.0	5.0	6.3
Casing		Galvanised steel plate				
Airflow rate (H/L)	m <sup>3</sup> /min	9/7		9.5/7.5	11/8	14/10
	cfm	318/247		335/265	388/282	493/353
Sound level (H/L)	230 V dB(A)	30/25		32/26	36/28	41/33
Dimensions (HxWxD)	mm	286x575x575				
Machine weight	kg	18				
Piping connections	Liquid (Flare)	ø 6.4				
	Gas (Flare)	ø 12.7				
	Drain	VP20 (External Dia, 26/Internal Dia, 20)				
Panel (Option)	Model	BYFQ60B3W1				
	Colour	White (6.5Y9.5/0.5)				
	Dimensions(HxWxD)	mm	55x700x700			
	Weight	kg	2.7			

Note: Specification are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.




## SPECIFICATIONS



## VRV Indoor Units

## Ceiling Mounted Cassette (Double Flow) Type



MODEL		FXCQ25AVM	FXCQ32AVM	FXCQ40AVM	FXCQ50AVM	FXCQ63AVM	FXCQ80AVM	FXCQ125AVM		
Power supply		1-phase, 220-240 V/50 Hz								
Cooling capacity	Btu/h	9,600	12,300	15,400	19,100	24,200	30,700	47,800		
	kW	2.8	3.6	4.5	5.6	7.1	9.0	14.0		
Heating capacity	Btu/h	10,900	13,600	17,100	21,500	27,300	34,100	54,600		
	kW	3.2	4.0	5.0	6.3	8.0	10.0	16.0		
Casing		Galvanised steel plate								
Airflow rate (HH/M/L)	m³/min	11.5/10.5/9.5/8.5/8		12/11/10.5/9.5/8.5		15/14/13/11.5/10.5		16/15/14/12.5/11.5	26/24/22.5/20.5/18.5	32/29.5/27.5/25/22.5
	cfm	406/371/335/300/282		424/388/371/335/300		530/494/459/406/371		565/530/494/441/406	918/847/794/724/653	1138/1041/971/883/794
Sound level (H/L) 220 V	dB(A)	34/33/31/30/29	34/33/32/31/30	36/35/33/32/31	37/36/35/33/31	39/38/37/35/32	42/40/38/36/33	46/44/42/40/38		
Dimensions (HxWxD)	mm	305x775x620			305x990x620		305x1,445x620			
Machine weight	kg	19			22	25	33	38		
Piping connections	Liquid (Flare)	mm	ø6.4			ø9.5				
	Gas (Flare)		ø12.7			ø15.9				
	Drain		VP25 (External Dia, 32/Internal Dia, 25)							
Panel (Option)	Model	BYBCQ40CF			BYBCQ63CF		BYBCQ125CF			
	Colour	Fresh white (6.5Y 9.5/0.5)								
	Dimensions(HxWxD)	mm	55x1,070x700			55x1,285x700		55x1,740x700		
	Weight	kg	10			11		13		

## Slim Ceiling Mounted Duct Type (700 mm width type)



MODEL	with drain pump	FXDQ20PDVM	FXDQ25PDVM	FXDQ32PDVM
Power supply		1-phase, 220-240 V/220 V, 50 Hz		
Cooling capacity	Btu/h	7,500	9,600	12,300
	kW	2.2	2.8	3.6
Heating capacity	Btu/h	8,500	10,900	13,600
	kW	2.5	3.2	4.0
Casing		Galvanised steel plate		
Airflow rate (HH/H/L)	m <sup>3</sup> /min	8.0/7.2/6.4	8.0/7.2/6.4	8.0/7.2/6.4
	cfm	282/254/226	282/254/226	282/254/226
External static pressure	Pa	30-10*2		
Sound level (HH/H/L) **3	dB(A)	33/31/29	33/31/29	33/31/29
Dimensions (HxWxD)	mm	200x700x620	200x700x620	200x700x620
Machine weight	kg	23.0	23.0	23.0
Piping connections	Liquid (Flare)	ø 6.4	ø 6.4	ø 6.4
	Gas (Flare)	ø 12.7	ø 12.7	ø 12.7
	Drain	VP20 (External Dia, 26/Internal Dia, 20)		

## Slim Ceiling Mounted Duct Type (900/1,100 mm width type)



MODEL	with drain pump	FXDQ40NDV	FXDQ50NDV	FXDQ63NDV
Power supply		1-phase, 220-240 V/220 V, 50 Hz		
Cooling capacity	Btu/h	15,400	19,100	24,200
	kW	4.5	5.6	7.1
Heating capacity	Btu/h	17,100	21,500	27,300
	kW	5.0	6.3	8.0
Casing		Galvanised steel plate		
Airflow rate (HH/H/L)	m <sup>3</sup> /min	10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0
	cfm	371/335/300	441/388/353	583/512/459
External static pressure	Pa	44-15*2		
Sound level (HH/H/L) **3	dB(A)	34/32/30	35/33/31	36/34/32
Dimensions (HxWxD)	mm	200x900x620	200x900x620	200x1,100x620
Machine weight	kg	27.0	28.0	31.0
Piping connections	Liquid (Flare)	ø 6.4	ø 6.4	ø 9.5
	Gas (Flare)	ø 12.7	ø 12.7	ø 15.9
	Drain	VP20 (External Dia, 26/Internal Dia, 20)		

Note: Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
  - Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- \* 1: Values are based on the following conditions: FXDQ-P: external static pressure of 10 Pa; FXDQ-N: external static pressure of 15 Pa.
  - \* 2: External static pressure is changeable to set by the remote controller. This pressure means "High static pressure - Standard". (Factory setting is 10 Pa for FXDQ-P models and 15 Pa for FXDQ-N models.)
  - \* 3: The values of operation sound level represent those for rear-suction operation. Sound level values for bottom-suction operation can be obtained by adding 5 dB(A).



## SPECIFICATIONS



## VRV Indoor Units

## Mid Static Pressure Ceiling Mounted Duct Type



MODEL	with drain pump	FXMQ40ARV1	FXMQ50ARV1	FXMQ63ARV1	FXMQ80ARV1	FXMQ100ARV1
Power supply			1-phase, 220-240 V, 50 Hz			
Cooling capacity	Btu/h	15,400	19,100	24,200	30,700	38,200
	kW	4.5	5.6	7.1	9.0	11.2
Heating capacity	Btu/h	17,100	21,500	27,300	34,100	42,700
	kW	5.0	6.3	8.0	10.0	12.5
Casing			Galvanized Steel Plate			
Airflow rate (HH/H/L)	m³/min	15/12	19/16	24/20	30/25	34/29
	cfm	530/425	671/565	848/706	1060/883	1200/1024
External static pressure	Pa	30-50				30-60
Sound level (H/L)	dB(A)	39/37	41/39	42/40	43/41	44/42
Dimensions (HxWxD)	mm	300x700x700			300x1000x700	
Machine weight	kg	27	28	35	36	
Piping connections	Liquid (Flare)	6.4 (Flare Connection)		9.5 (Flare Connection)		
	Gas (Flare)	12.7 (Flare Connection)		15.9 (Flare Connection)		
	Drain	VP25 (External Dia. 32, Internal Dia. 25)				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.

## Ceiling Mounted Duct Type



MODEL	FXMQ20PVE	FXMQ25PVE	FXMQ32PVE	FXMQ40PBV36	FXMQ50PBV36
Power supply	1-phase, 220-240 V/220 V, 50 Hz				
Cooling capacity	Btu/h	7,500	9,600	12,300	15,400
	kW	2.2	2.8	3.6	4.5
Heating capacity	Btu/h	8,500	10,900	13,600	17,100
	kW	2.5	3.2	4.0	5.0
Casing		Galvanised steel plate			
Airflow rate (HH/H/L)	m <sup>3</sup> /min	9/7.5/6.5	9.5/8/7	16/13/11	18/16.5/15
	cfm	318/265/230	335/282/247	565/459/388	635/582/530
External static pressure	Pa	30-100 (50) *2		30-160 (100) *2	50-200 (100) *2
Sound level (HH/H/L)	dB(A)	33/31/29	34/32/30	39/37/35	41/39/37
Dimensions (HxWxD)	mm	300X550X700		300X700X700	300X1,000X700
Machine weight	kg	25		27	35
Piping connections	Liquid (Flare)	ø 6.4			
	Gas (Flare)	ø 12.7			
	Drain	VP25 (External Dia, 32/Internal Dia, 25)			

MODEL	FXMQ63PBV36	FXMQ80PBV36	FXMQ100PBV36	FXMQ125PBV36	FXMQ140PBV36
Power supply	1-phase, 220-240 V/220 V, 50 Hz				
Cooling capacity	Btu/h	24,200	30,700	38,200	47,800
	kW	7.1	9.0	11.2	14.0
Heating capacity	Btu/h	27,300	34,100	42,700	54,600
	kW	8.0	10.0	12.5	16.0
Casing		Galvanised steel plate			
Airflow rate (HH/H/L)	m <sup>3</sup> /min	19.5/17.5/16	25/22.5/20	32/27/23	39/33/28
	cfm	688/618/565	883/794/706	1,130/953/812	1,377/1,165/988
External static pressure	Pa	50-200 (100) *2		50-200 (100) *2	50-140 (100) *2
Sound level (HH/H/L)	dB(A)	42/40/38	43/41/39	43/41/39	44/42/40
Dimensions (HxWxD)	mm	300x1,000x700		300x1,400x700	
Machine weight	kg	35		45	46
Piping connections	Liquid (Flare)	9.5			
	Gas (Flare)	15.9			
	Drain	VP25 (External Dia, 32/Internal Dia, 25)			

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
  - Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- \* 1: Power consumption values are based on conditions of rated external static pressure.
- \* 2: External static pressure can be modified using a remote controller that offers seven (FXMQ20-32P), thirteen (FXMQ40P), fourteen (FXMQ50-125P) or ten (FXMQ140P) levels of control. These values indicate the lowest and highest possible static pressures. The standard static pressure is 50 Pa for FXMQ20-32P and 100 Pa for FXMQ40-140P.



## SPECIFICATIONS



## VRV Indoor Units

## Ceiling Mounted Duct Type



Heating capacity

MODEL		FXMQ170NVE6	FXMQ200NVE6	FXMQ250NVE6
Power supply		1-phase, 220, 240 V/220 V, 50 Hz		
Cooling capacity	Btu/h	65,800	76,400	95,500
	kW	19.3	22.4	28
Heating capacity	Btu/h	71,600	83,300	1,07,500
	kW	21	25	31.5
Casing		Galvanised steel plate		
Airflow rate (H/L)	m³/min	58/50	65/58	80/73
	cfm	2,047/1,765	2,295/2,047	2,825/2,578
External static pressure	Pa	100-140 **	100-200 **	190-270 **
Sound level (H/L) 220V	dB(A)	45/42	47/45	49/47
Dimensions (HxWxD)	mm	440x1,190x1,090		440x1,490x1,090
Machine weight	kg	110		130
Piping connections	Liquid (Flare)	ø 9.5		
	Gas (Flare)	ø 19.1		ø 22.2
	Drain	External Dia 32		

## 4-way Flow Ceiling Suspended Type



MODEL		FXUQ71AVEB	FXUQ100AVEB
Power supply		1-phase, 220-240 V/220-230V, 50 Hz	
Cooling capacity	Btu/h	27,300	38,200
	kW	8.0	11.2
Heating capacity	Btu/h	30,700	42,700
	kW	9.0	12.5
Casing		Fresh white	
Airflow rate (H/L)	m³/min	22.5/19.5/16	31/26/21
	cfm	794/688/565	1,094/918/741
Sound level (H/M//L)	dB(A)	40/38/36	47/44/40
Dimensions (HxWxD)	mm	198x950x950	
Machine weight	kg	26	27
Piping connections	Liquid (Flare)	9.5	
	Gas (Flare)	15.9	
	Drain	VP20 (External Dia, 26/Internal Dia, 20)	

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
  - Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Ceiling Suspended Type



MODEL		FXHQ32MAVE	FXHQ63MAVE	FXHQ100MAVE
Power supply		1-phase, 220-240 V/220 V, 50 Hz		
Cooling capacity	Btu/h	12,300	24,200	38,200
	kW	3.6	7.1	11.2
Heating capacity	Btu/h	13,600	27,300	42,700
	kW	4.0	8.0	12.5
Casing		White (10Y9/0.5)		
Airflow rate (H/L)	m³/min	12/10	17.5/14	25/19.5
	cfm	424/353	618/494	883/688
Sound level (H/L) 220V	dB(A)	36/31	39/34	45/37
Dimensions (HxWxD)	mm	195x960x680	195x1,160x680	195x1,400x680
Machine weight	kg	24.0	28.0	33.0
Piping connections	Liquid (Flare)	ø 6.4	ø 9.5	ø 9.5
	Gas (Flare)	ø 12.7	ø 15.9	ø 15.9
	Drain	VP20 (External Dia, 26/Internal Dia, 20)		

Note: Specifications are based on the following conditions

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
  - Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
  - Sound level: (FXMQ-MA) Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
  - Sound level: (FXHQ-MA) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward.
- During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- \* 1: Power consumption values are based on conditions of standard external static pressure.
- \* 2: External static pressure is changeable to change over the connectors inside electrical box, this pressure means "Standard-High static pressure".

## Wall Mounted Type



MODEL		FXAQ20ARVE6	FXAQ25ARVE6	FXAQ32ARVE6	FXAQ40ARVE6	FXAQ50ARVE6	FXAQ63ARVE6
Power supply		1-phase, 220 V/220 V, 50 Hz					
Cooling capacity	Btu/h	7,500	9,600	12,300	15,400	19,100	24,200
	kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity	Btu/h	8,500	10,900	13,600	17,100	21,500	27,300
	kW	2.5	3.2	4.0	5.0	6.3	8.0
Casing		White (N9.5)					
Airflow rate (H/L)	m³/min	7.5/4.5	9/5	11/5.5	13/9	15/12	19/14
	cfm	265/159	318/177	388/194	459/318	530/424	671/494
Sound level (H/L)	dB(A)	35/31	36/31	38/31	39/34	42/37	47/41
Dimensions (HxWxD)	mm	298x929x258					
Machine weight	kg	13.0					
Piping connections	Liquid (Flare)	ø 6.4					ø 9.5
	Gas (Flare)	ø 12.7					ø 15.9
	Drain	VP13 (External Dia, 18/Internal Dia, 13)					



## SPECIFICATIONS



## VRV Indoor Units

## Floor Standing Type/Concealed Floor Standing Type



FXLQ



FXNQ

Heating capacity

MODEL		FXLQ32MAVE		FXLQ50MAVE		FXLQ63MAVE		
		FXNQ32MAVE		FXNQ50MAVE		FXNQ63MAVE		
Power supply		1-phase, 220-240 V/220 V, 50 Hz						
Cooling capacity	Btu/h	12,300		19,100		24,200		
	kW	3.6		5.6		7.1		
Heating capacity	Btu/h	13,600		21,500		27,300		
	kW	4.0		6.3		8.0		
Casing		FXLQ: Ivory white (5Y7.5/1)/FXNQ: Galvanised steel plate						
Airflow rate (H/L)	m <sup>3</sup> /min	8/6		14/11		16/12		
	cfm	282/212		494/388		565/424		
Sound level (H/L) 220V		dB(A)		35/32		39/34		
Dimensions (HxWxD)	FXLQ	mm	600x1,140x222		600x1,420x222		600x1,420x222	
	FXNQ		610x1,070x220		610x1,350x220		610x1,350x220	
Machine weight	FXLQ	kg	30.0		36.0		36.0	
	FXNQ		23.0		27.0		27.0	
Piping connections	Liquid (Flare)	mm	ø 6.4		ø 6.4		ø 9.5	
	Gas (Flare)		ø 12.7		ø 12.7		ø 15.9	
	Drain		21 O.D.					

Note: Specifications are based on the following conditions:



- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
- Sound level: (FXAQ-P) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward.
- (FXLQ-MA, FXNQ-MA) Anechoic chamber conversion value, measured at a point 1.5 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## VRV X (Cooling Only)



								
MODEL			RXQ6ARY1	RXQ8ARY1	RXQ10ARY1	RXQ12ARY1	RXQ14ARY1	RXQ16ARY1
Combination units			—	—	—	—	—	—
Power supply			3-phase, 380–415 V, 50 Hz					
Cooling capacity	Btu/h	54,600	76,400	95,500	1,14,000	1,36,000	1,54,000	
	kW	16.0	22.4	28.0	33.5	40.0	45.0	
Capacity control	%	25~100	20~100	13~100	12~100	11~100	10~100	
Casing colour			Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type						
	No. of compressor	1	1	1	1	1	2	
Airflow rate	m³/min	119	178		191	257		
Dimensions (HxWxD)	mm	1,657X930X765				1,657X1,240X765		
Machine weight	kg	165			175		220	260
Sound level	dB(A)	56	56	57	59	60	60	
Operation range	Cooling	°CDB	10 ~ 49					
Refrigerant	Type	R410A						
	Charge	kg	5.9		6.7	6.8	7.4	8.2
Piping connections	Liquid	mm	ø 9.5			ø 12.7		
	Gas	mm	ø 19.1		ø 22.2	ø 28.6		

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.





## SPECIFICATIONS



## Outdoor Units

## VRV X (Cooling Only)

						
MODEL			RXQ18ARY1	RXQ20ARY1	RXQ22ARY1	RXQ24ARY1
Combination units			—	—	RXQ10ARY1	RXQ12ARY1
			—	—	RXQ12ARY1	RXQ12ARY1
			—	—	—	—
Power supply			3-phase, 380–415 V, 50 Hz			
Cooling capacity	Btu/h	1,71,000	1,91,000	2,10,000	2,29,000	
	kW	50.0	56.0	61.5	67.0	
Capacity control	%	10~100	7~100	6~100		
Casing colour			Ivory white (5Y7.5/1)			
Compressor	Type	Hermetically Sealed Scroll Type				
	No. of compressor	2	2	1+1	1+1	
Airflow rate	m³/min	257	297	178+191	191+191	
Dimensions (HxWxD)	mm	1,657x1,240x765		(1,657x930x765)+(1,657x930x765)		
Machine weight	kg	260	285	175+175		
Sound level	dB(A)	61	65	61	62	
Operation range	Cooling °CDB	10 ~ 49				
Refrigerant	Type	R410A				
	Charge kg	8.4	11.8	6.7+6.8	6.8+6.8	
Piping connections	Liquid mm	ø 15.9				
	Gas mm	ø 28.6			ø 34.9	



Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## VRV X (Cooling Only)

								
MODEL			RXQ26ARY1	RXQ28ARY1	RXQ30ARY1	RXQ32ARY1	RXQ34ARY1	RXQ36ARY1
Combination units			RXQ12ARY1	RXQ12ARY1	RXQ12ARY1	RXQ14ARY1	RXQ16ARY1	RXQ18ARY1
			RXQ14ARY1	RXQ16ARY1	RXQ18ARY1	RXQ18ARY1	RXQ18ARY1	RXQ18ARY1
			—	—	—	—	—	—
Power supply			3-phase, 380–415 V, 50 Hz					
Cooling capacity	Btu/h	2,47,000	2,68,000	2,85,000	3,05,000	3,24,000	3,41,000	
	kW	73.5	78.5	83.5	90	95.0	100	
Capacity control	%	6~100	5~100	5~100	5~100	4~100	5~100	
Casing colour			Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type						
	No. of compressor	1+1	1+2	1+2	1+2	2+2	2+2	
Airflow rate	m³/min	191+257	191+257	191+257	257+257	257+257	257+257	
Dimensions (HxWxD)	mm	(1,657x930x765)+(1,657x1,240x765)				(1,657x1,240x765)+(1,657x1,240x765)		
Machine weight	kg	175+220	175+260			220+260	260+260	
Sound level	dB(A)	63				64		
Operation range	Cooling	°CDB	10 ~ 49					
Refrigerant	Type	R410A						
	Charge	kg	6.8+7.4	6.8+8.2	6.8+8.4	7.4+8.4	8.2+8.4	8.4+8.4
Piping connections	Liquid	mm	ø 19.1	ø 19.1	ø 19.1	ø 19.1	ø 19.1	ø 19.1
	Gas	mm	ø 34.9	ø 34.9	ø 34.9	ø 34.9	ø 34.9	ø 41.3

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.






## SPECIFICATIONS



## Outdoor Units

## VRV X (Cooling Only)

						
RXQ38ARY1	RXQ40ARY1	RXQ42ARY1	RXQ44ARY1	RXQ46ARY1	RXQ48ARY1	RXQ50ARY1
RXQ18ARY1	RXQ20ARY1	RXQ12ARY1	RXQ12ARY1	RXQ14ARY1	RXQ14ARY1	RXQ14ARY1
RXQ20ARY1	RXQ20ARY1	RXQ12ARY1	RXQ12ARY1	RXQ14ARY1	RXQ16ARY1	RXQ18ARY1
—	—	RXQ18ARY1	RXQ20ARY1	RXQ18ARY1	RXQ18ARY1	RXQ18ARY1
3-phase, 380~415 V, 50 Hz						
3,62,000	3,82,000	3,99,000	4,20,000	4,40,000	4,57,000	4,78,000
106	112	117	123	129	134	140
4~100			3~100	4~100	3~100	
Ivory white (5Y7.5/1)						
Hermetically Sealed Scroll Type						
2+2		1+1+2				1+2+2
257+297	297+297	191+191+257	191+191+297	257+257+257		
(1,657X1,240X765)+ (1,657X1,240X765)		(1,657X930X765)+ (1,657X930X765)+ (1,657X1,240X765)		(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)		
260+285	285+285	175+175+260	175+175+285	220+220+260	220+260+260	220+260+260
66	68	65	67	65		
10 ~ 49						
R410A						
8.4+11.8	11.8+11.8	6.8+6.8+8.4	6.8+6.8+11.8	7.4+7.4+11.8	7.4+8.2+8.4	7.4+8.4+8.4
Ø 19.1						
Ø 41.3						


Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## VRV X (Cooling Only)

							
MODEL			RXQ52ARY1	RXQ54ARY1	RXQ56ARY1	RXQ58ARY1	RXQ60ARY1
Combination units			RXQ16ARY1	RXQ18ARY1	RXQ18ARY1	RXQ18ARY1	RXQ20ARY1
			RXQ18ARY1	RXQ18ARY1	RXQ18ARY1	RXQ20ARY1	RXQ20ARY1
			RXQ18ARY1	RXQ18ARY1	RXQ20ARY1	RXQ20ARY1	RXQ20ARY1
Power supply			3-phase, 380~415 V, 50 Hz				
Cooling capacity	Btu/h	4,95,000	5,12,000	5,32,000	5,53,000	5,73,000	
	kW	145	150	156	162	168	
Capacity control	%	3~100					2~100
Casing colour			Ivory white (5Y7.5/1)				
Compressor	Type	Hermetically Sealed Scroll Type					
	No. of compressor	2+2+2					
Airflow rate	m³/min	257+257+257			257+297+297		
Dimensions (HxWxD)	mm	(1,657x1,240x765 + 1,657x1,240x765 + 1,657x1,240x765)					
Machine weight	kg	260+260+260			260+260+285	260+285+285	285+285+285
Sound level	dB(A)	65	66	68	69	70	
Operation range	Cooling	°CDB	10 ~ 49				
Refrigerant	Type	R410A					
	Charge	kg	8.2+8.4+8.4	8.4+8.4+8.4	8.4+8.4+11.8	8.4+11.8+11.8	11.8+11.8+11.8
Piping connections	Liquid	mm	ø 19.1				
	Gas	mm	ø 41.3				

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.





## SPECIFICATIONS



## Outdoor Units

## VRV X (Heat Pump)

								
MODEL			RXYQ6ARY6	RXYQ8ARY6	RXYQ10ARY6	RXYQ12ARY6	RXYQ14ARY6	RXYQ16ARY6
Combination units			—	—	—	—	—	—
Power supply			3-phase, 380–415 V, 50 Hz					
Cooling capacity	Btu/h	54,600	76,400	95,500	1,14,000	1,36,000	1,54,000	
	kW	16.0	22.4	28.0	33.5	40.0	45.0	
Heating capacity	Btu/h	61,400	85,300	1,07,000	1,28,000	1,54,000	1,71,000	
	kW	18.0	25.0	31.5	37.5	45.0	50.0	
Capacity control	%	25-100	20-100	13-100	12-100	11-100	10-100	
Casing colour			Ivory white (5Y7.5/1)					
Compressor	Type	Hermetically Sealed Scroll Type						
	No. of compressor	1				2		
Airflow rate	m <sup>3</sup> /min	119	178		191	257		
Dimensions (HxWxD)	mm	1,657X930X765				1,657X1,240X765		
Machine weight	kg	180		195		265		
Sound level	dB(A)	56		57		60		
Operation range	Cooling	°CDB -5 ~ 49						
	Heating	°CDB -20 ~ 15.5						
Refrigerant	Type	R410A						
	Charge	kg	6.9	7.0	7.4	7.6	9.1	9.3
Piping connections	Liquid	mm	ø 9.5			ø 12.7		
	Gas	mm	ø 19.1		ø 22.2	ø 28.6		

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## VRV X (Heat Pump)

						
MODEL			RXYQ18ARY6	RXYQ20ARY6	RXYQ22ARY6	RXYQ24ARY6
Combination units			—	—	RXYQ10ARY6	RXYQ12ARY6
			—	—	RXYQ12ARY6	RXYQ12ARY6
			—	—	—	—
Power supply			3-phase, 380–415 V, 50 Hz			
Cooling capacity	Btu/h	1,71,000	1,91,000	2,10,000	2,29,000	
	kW	50.0	56.0	61.5	67.0	
Heating capacity	Btu/h	1,91,000	2,15,000	2,35,000	2,56,000	
	kW	56.0	63.0	69.0	75.0	
Capacity control	%	10-100	7-100	6-100		
Casing colour			Ivory white (5Y7.5/1)			
Compressor	Type	Hermetically Sealed Scroll Type				
	No. of compressor	2			1+1	
Airflow rate	m³/min	257	297	178+191	191+191	
Dimensions (HxWxD)	mm	1,657X1,240X765			(1,657X930X765)+(1,657X930X765)	
Machine weight	kg	285	305	195+195		
Sound level	dB(A)	61	65	61	62	
Operation range	Cooling	°CDB	-5 ~ 49			
	Heating	°CDB	-20 ~ 15.5			
Refrigerant	Type	R410A				
	Charge	kg	11.8	7.4+7.6	7.6+7.6	
Piping connections	Liquid	mm	ø 15.9			
	Gas	mm	ø 28.6			ø 34.9

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.





## SPECIFICATIONS



## Outdoor Units

## VRV X (Heat Pump)

									
MODEL			RXYQ26ARY6	RXYQ28ARY6	RXYQ30ARY6	RXYQ32ARY6	RXYQ34ARY6	RXYQ36ARY6	
Combination units			RXYQ12ARY6	RXYQ12ARY6	RXYQ12ARY6	RXYQ16ARY6	RXYQ16ARY6	RXYQ16ARY6	
			RXYQ14ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ20ARY6	
			—	—	—	—	—	—	
Power supply			3-phase, 380–415 V, 50 Hz						
Cooling capacity	Btu/h		2,47,000	2,68,000	2,85,000	3,05,000	3,24,000	3,45,000	
	kW		73.5	78.5	83.5	90.0	95.0	101.0	
Heating capacity	Btu/h		—	2,99,000	3,19,000	3,41,000	3,62,000	3,86,000	
	kW		82.5	87.5	93.5	100.0	106.0	113.0	
Capacity control	%		5-100						4-100
Casing colour			Ivory white (5Y7.5/1)						
Compressor	Type		Hermetically Sealed Scroll Type						
	No. of compressor		1+2			2+2			
Airflow rate	m <sup>3</sup> /min		191+257			257+257		257+297	
Dimensions (HxWxD)	mm		(1,657X930X765)+(1,657X1,240X765)			(1,657X1,240X765)+(1,657X1,240X765)			
Machine weight	kg		195+265		195+285	265+265	265+285	265+305	
Sound level	dB(A)		63					64	66
Operation range	Cooling	°CDB	-5 ~ 49						
	Heating	°CDB	-20 ~ 15.5						
Refrigerant	Type		R410A						
	Charge	kg	7.6+9.1	7.6+9.3	7.6+11.8	9.3+9.3	9.3+11.8		
Piping connections	Liquid	mm	ø 19.1						
	Gas	mm	ø 34.9						ø 41.3



Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.

## Outdoor Units

## VRV X (Heat Pump)

						
MODEL			RXYQ38ARY6	RXYQ40ARY6	RXYQ42ARY6	RXYQ44ARY6
Combination units			RXYQ18ARY6	RXYQ20ARY6	RXYQ12ARY6	RXYQ12ARY6
			RXYQ20ARY6	RXYQ20ARY6	RXYQ12ARY6	RXYQ12ARY6
			—	—	RXYQ18ARY6	RXYQ20ARY6
Power supply			3-phase, 380~415 V, 50 Hz			
Cooling capacity	Btu/h	3,62,000	3,82,000	3,99,000	4,20,000	
	kW	106.0	112.0	117.0	123.0	
Heating capacity	Btu/h	4,06,000	4,30,000	4,47,000	4,71,000	
	kW	119.0	126.0	131.0	138.0	
Capacity control	%	4 - 100	3 - 100	4 - 100	3 - 100	
Casing colour			Ivory white (5Y7.5/1)			
Compressor	Type	Hermetically Sealed Scroll Type				
	No. of compressor	2+2			1+1+2	
Airflow rate	m <sup>3</sup> /min	257+297	297+297	191+191+257	191+191+297	
Dimensions (HxWxD)	mm	(1,657X1,240X765)+ (1,657X1,240X765)			(1,657X930X765)+ (1,657X930X765)+ (1,657X1,240X765)	
Machine weight	kg	285+305	305+305	195+195+285	200+200+325	
Sound level	dB(A)	66	68	65	67	
Operation range	Cooling	°CDB -5 ~ 49				
	Heating	°CDB -20 ~ 15.5				
Refrigerant	Type	R410A				
	Charge	kg	11.8+11.8			7.6+7.6+11.8
Piping connections	Liquid	mm	ø 19.1			
	Gas	mm	ø 41.3			

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.





## SPECIFICATIONS

## Outdoor Units

## VRV X (Heat Pump)



							
RXYQ46ARY6	RXYQ48ARY6	RXYQ50ARY6	RXYQ52ARY6	RXYQ54ARY6	RXYQ56ARY6	RXYQ58ARY6	RXYQ60ARY6
RXYQ14ARY6	RXYQ16ARY6	RXYQ16ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ20ARY6
RXYQ16ARY6	RXYQ16ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ20ARY6	RXYQ20ARY6
RXYQ16ARY6	RXYQ16ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ18ARY6	RXYQ20ARY6	RXYQ20ARY6	RXYQ20ARY6
3-phase, 380~415 V, 50 Hz							
4,44,000	4,61,000	4,78,000	4,95,000	5,12,000	5,32,000	5,53,000	5,73,000
130.0	135.0	140.0	145.0	150.0	156.0	162.0	168.0
4,95,000	5,12,000	5,32,000	5,53,000	5,73,000	5,97,000	6,21,000	6,45,000
145.0	150.0	156.0	162.0	168.0	175.0	182.0	189.0
3 - 100						2 - 100	
Ivory white (5Y7.5/1)							
Hermetically Sealed Scroll Type							
2+2+2							
257+257+257		257+257+297	257+257+257		257+257+297	257+297+297	297+297+297
(1,657X1,240X765)+ (1,657X1,240X765)+ (1,657X1,240X765)			(1,657X1,240X765 + 1,657X1,240X765 + 1,657X1,240X765)				
195+195+305	265+265+265	265+265+285	265+285+285	285+285+285	285+285+305	285+305+305	305+305+305
65				66	68	69	70
-5 ~ 49							
-20 ~ 15.5							
R410A							
9.1+9.3+9.3	9.3+9.3+9.3	9.3+9.3+11.8	9.3+11.8+11.8	11.8+11.8+11.8			
Ø 19.1							
Ø 41.3							

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.
- Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CWB, Equivalent piping length: 7.5m, Level difference: 0m.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.


**VRV X**

OUTDOOR UNIT  
COMBINATIONS  
& OPTION LIST



## OUTDOOR UNIT COMBINATIONS

## OPTION LIST



## VRV X

HP	Capacity index	Model name	Combination for cooling only	Combination for heat pump	Outdoor unit multi connection piping kit <sup>*1</sup>	Total capacity index of connectable indoor units <sup>*2</sup>	Maximum number of connectable indoor units <sup>*2</sup>
6	150	RX(Y)Q6A	RXQ6A	RXYQ6A	—	75 to 195 (300)	9 (15)
8	200	RX(Y)Q8A	RXQ8A	RXYQ8A	—	100 to 260 (400)	13 (20)
10	250	RX(Y)Q10A	RXQ10A	RXYQ10A	—	125 to 325 (500)	16 (25)
12	300	RX(Y)Q12A	RXQ12A	RXYQ12A	—	150 to 390 (600)	19 (30)
14	350	RX(Y)Q14A	RXQ14A	RXYQ14A	—	175 to 455 (700)	22 (35)
16	400	RX(Y)Q16A	RXQ16A	RXYQ16A	—	200 to 520 (800)	26 (40)
18	450	RX(Y)Q18A	RXQ18A	RXYQ18A	—	225 to 585 (900)	29 (45)
20	500	RX(Y)Q20A	RXQ20A	RXYQ20A	—	250 to 650 (1,000)	32 (50)
22	550	RX(Y)Q22A	RXQ10A + RXQ12A	RXYQ10A + RXYQ12A	BHFP22P1006	275 to 715 (880)	35 (44)
24	600	RX(Y)Q24A	RXQ12A × 2	RXYQ12A × 2		300 to 780 (960)	39 (48)
26	650	RX(Y)Q26A	RXQ12A + RXQ14A	RXYQ12A + RXYQ14A		325 to 845 (1,040)	42 (52)
28	700	RX(Y)Q28A	RXQ12A + RXQ16A	RXYQ12A + RXYQ16A		350 to 910 (1,120)	45 (56)
30	750	RX(Y)Q30A	RXQ12A + RXQ18A	RXYQ12A + RXYQ18A		375 to 975 (1,200)	48 (60)
32	800	RX(Y)Q32A	RXQ14A + RXQ18A	RXYQ16A + RXYQ16A		400 to 1,040 (1,280)	52 (64)
34	850	RX(Y)Q34A	RXQ16A + RXQ18A	RXYQ16A + RXYQ18A		425 to 1,105 (1,360)	55 (64)
36	900	RX(Y)Q36A	RXQ18A × 2	RXYQ16A + RXYQ20A		450 to 1,170 (1,440)	58 (64)
38	950	RX(Y)Q38A	RXQ18A + RXQ20A	RXYQ18A + RXYQ20A		475 to 1,235 (1,520)	61 (64)
40	1,000	RX(Y)Q40A	RXQ20A × 2	RXYQ20A × 2		500 to 1,300 (1,600)	64 (64)
42	1,050	RX(Y)Q42A	RXQ12A × 2 + RXQ18A	RXYQ12A × 2 + RXYQ18A	BHFP22P1516	525 to 1,365 (1,365)	
44	1,100	RX(Y)Q44A	RXQ12A × 2 + RXQ20A	RXYQ12A × 2 + RXYQ20A		550 to 1,430 (1,430)	
46	1,150	RX(Y)Q46A	RXQ14A + RXQ14A + RXQ18A	RXYQ14A + RXYQ16A + RXYQ16A		575 to 1,495 (1,495)	
48	1,200	RX(Y)Q48A	RXQ14A + RXQ16A + RXQ18A	RXYQ16A × 3		600 to 1,560 (1,560)	
50	1,250	RX(Y)Q50A	RXQ14A + RXQ18A + RXQ18A	RXYQ16A + RXYQ16A + RXYQ18A		625 to 1,625 (1,625)	
52	1,300	RX(Y)Q52A	RXQ16A + RXQ18A × 2	RXYQ16A + RXYQ18A × 2		650 to 1,690 (1,690)	
54	1,350	RX(Y)Q54A	RXQ18A × 3	RXYQ18A × 3		675 to 1,755 (1,755)	
56	1,400	RX(Y)Q56A	RXQ18A × 2 + RXQ20A	RXYQ18A × 2 + RXYQ20A		700 to 1,820 (1,820)	
58	1,450	RX(Y)Q58A	RXQ18A + RXQ20A × 2	RXYQ18A + RXYQ20A × 2		725 to 1,885 (1,885)	
60	1,500	RX(Y)Q60A	RXQ20A × 3	RXYQ20A × 3		750 to 1,950 (1,950)	

**Note:** \*1 For multiple connection of 22 HP systems and above, the outdoor unit multi connection piping kit (separately sold) is required.

\*2 Values inside brackets are based on connection of indoor units rated at maximum capacity, 200% for single outdoor units, 160% for double outdoor units, and 130% for triple outdoor units. Refer to page 17 for notes on connection capacity of indoor units.

## VRV Indoor Units

## Ceiling Mounted Cassette Round Flow &amp; Round Flow With Sensing (Optional)

No.	Item			Type	FXFSQ25A FXFSQ32A FXFSQ40A	FXFSQ50A FXFSQ63A FXFSQ80A	FXFSQ100A FXFSQ125A FXFSQ140A
1	Decoration panel	Standard panel	Fresh white		BYCQ125EAF9 *		
			Black		BYCQ125EAK *		
		Designer panel <sup>1</sup>	Fresh white		BYCQ125EAPF *		
		Auto grille panel <sup>2,3</sup>	Fresh white		BYCQ125EASF *		
		Sensing panel	Fresh white		BYCQ140EEF6 *		
Black			BYCQ125EEK *				
2	Sealing material of air discharge outlet <sup>4</sup>	For usage of 3-4-way flow	KDBH551C160				
		For usage of 2-way flow	KDBH552C160				
3	Panel spacer	KDBP55H160FA					
4	Fresh air intake kit	Chamber type <sup>5,6</sup>	Without T-duct joint	KDDP55B160 (Components: KDDP55C160-1, KDDP55B160-2) *			
			With T-duct joint	KDDP55B160K (Components: KDDP55C160-1, KDDP55B160K2) *			
		Direct installation type <sup>7</sup>		KDDP55X160A			
5	High-efficiency filter unit <sup>9</sup> (Including filter chamber)	(Colorimetric method 65%)	KAFP556C80		KAFP556C160		
		(Colorimetric method 90%)	KAFP557C80		KAFP557C160		
6	Replacement high-efficiency filter <sup>9,10</sup>	(Colorimetric method 65%)	KAFP552B80		KAFP552B160		
		(Colorimetric method 90%)	KAFP553B80		KAFP553B160		
7	Filter chamber	KDDFP55C160					
8	Replacement long-life filter	KAFP551K160					
9	Replacement long-life filter (Auto grille panel)	KAFP551H160					
10	Ultra long-life filter unit (Including filter chamber) <sup>9</sup>	KAFP55C160					
11	Replacement ultra long-life filter <sup>9,10</sup>	KAFP55H160H					
12	Branch duct chamber <sup>4</sup>	KDJP55C80		KDJP55C160			
13	Insulation kit for high humidity <sup>9,11</sup>	KDTP55K80		KDTP55K160			

Note:

- When installing designer panel, body height (ceiling required dimension) is 42 mm higher than standard panel. Designer panel cannot operate 2 and 3 way flow.
- A dedicated wireless remote controller (BRC16A2) for the auto grille panel is included for lowering and raising the suction grille.
- When installing auto grille panel, body height (ceiling required dimension) is 55 mm higher than standard panel.
- Circulation airflow is not available with this option.
- When installing a fresh air intake kit (chamber type), two air outlet corners are closed.
- It is recommended that the volume of outdoor air introduced through the kit is limited to 10% of the maximum airflow rate of the indoor unit. Introducing higher quantities will increase the operating sound and may also influence temperature sensing.
- The volume of fresh air for direct installation type is approximately 1% of the indoor unit airflow. The chamber type is recommended when more fresh air is necessary.
- Please order using the names of both components instead of set name.
- This option cannot be installed to designer panel and auto grille panel.
- Filter chamber is required.
- Please use in case temperature/humidity inside ceiling may get over 30°C, 80% RH.
- These panels do not contain the sensing function.



## OPTION LIST



## VRV Indoor Units

## Ceiling Mounted Cassette (Compact Multi Flow) Type

No.	Item	Type	FXZQ20M	FXZQ25M	FXZQ32M	FXZQ40M	FXZQ50M
1	Decoration panel				BYFQ6083W1		
2	Sealing material of air discharge outlet				KDBH44BA60		
3	Panel spacer				KDBQ44BA60A		
4	Replacement long-life filter				KAFQ441BA60		
5	Fresh air intake kit	Direct installation type			KDDQ44XA60		

## Ceiling Mounted Cassette (Double Flow) Type

No.	Item	Type	FXCQ25A	FXCQ32A FXCQ40A	FXCQ50A	FXCQ63A	FXCQ80A	FXCQ125A
1	Decoration panel		BYBCQ40CF		BYBCQ63CF		BYBCQ125CF	
2	Filter related	High efficiency filter*1	65%	KAFP532B50	KAFP532B80	KAFP532B160		
			90%	KAFP533B50	KAFP533B80	KAFP533B160		
		Filter chamber bottom suction		KDDFP53B50	KDDFP53B80	KDDFP53B160		
				KAFP531B50	KAFP531B80	KAFP531B160		
3	Remote controller	Wireless	H/P		BRC7M65			
4	Navigation remote controller (Wired remote controller)				BRC1E63			

Note: \* 1 Filter chamber is required if installing high efficiency filter.

## Slim Ceiling Mounted Duct Type (700 mm width type)

No.	Item	Type	FXDQ20PD	FXDQ25PD	FXDQ32PD
1	Insulation kit for high humidity			KDT25N32	

## Slim Ceiling Mounted Duct Type (900/1,100 mm width type)

No.	Item	Type	FXDQ40ND	FXDQ50ND	FXDQ63ND
1	Insulation kit for high humidity			KDT25N50	KDT25N63

## High Static Ceiling Mounted Duct Type

No.	Item	Type	FXMQ20P FXMQ25P FXMQ32P	FXMQ40P	FXMQ50P FXMQ63P FXMQ80P	FXMQ100P FXMQ125P FXMQ140P
1	Drain pump kit					
2	High efficiency filter	65%	KAF372AA36	KAF372AA56	KAF372AA80	KAF372AA160
		90%	—	KAF373AA56	KAF373AA80	KAF373AA160
3	Filter chamber		—	BDDF37A40~6	BDDF37A80~6	BDDF37A140~6
4	Long-life replacement filter		—	KAF371AA56	KAF371AA80	KAF371AA160
5	Long-life filter chamber kit		—	KAF375AA56	KAF375AA80	KAF375AA160
6	Service panel	White	KTBJ25K36W	KTBJ25K56W	KTBJ25K80W	KTBJ25K160W
		Fresh white	KTBJ25K36F	KTBJ25K56F	KTBJ25K80F	KTBJ25K160F
		Brown	KTBJ25K36T	KTBJ25K56T	KTBJ25K80T	KTBJ25K160T
7	Air discharge adaptor		KDAJ25K36A	KDAJ25K56A	KDAJ25K71A	KDAJ25K140A
8	Suction Flange		KDF37AA36	BDF37A40~6	BDF37A80~6	BDF37A140~6

## VRV Indoor Units

## Ceiling Suspended Type

No.	Item	Type	FXHQ32MA	FXHQ63MA	FXHQ100MA
1	Drain pump kit		KDU50N60VE		KDU50N125VE
2	Replacement long-life filter (Resin net)		KAF501DA56	KAF501DA80	KAF501DA112
3	L-type piping kit (for upward direction)		KHFP5MA63		KHFP5MA160

## Floor Standing Type/Concealed Floor Standing Type

No.	Item	Type	FXLQ32MA/FXNQ32MA	FXLQ50MA/FXNQ50MA	FXLQ63MA/FXNQ63MA
1	Long-life replacement filter		KAFJ361K45		KAFJ361K71

## Mid Static Ceiling Mounted Duct Type

No.	Item	Type	Duct Type	
			FXMQ40ARV1, FXMQ50ARV1	FXMQ63ARV1, FXMQ80ARV1, FXMQ100ARV1
1	High Efficiency Filter	65%	KAF372AA56	KAF372AA80
2	Filter Chamber	Type	BDDF37A40~6	BDDF37A80~6
3	Long-Life Replacement Filter	Type	KAF371AA56	KAF371AA80
4	Suction Flange		BDF37A40~6	BDF37A80~6
5	Service Panel		KTBJ25K56W	KTBJ25K80W
			KTBJ25K56F	KTBJ25K80F
			KTBJ25K56T	KTBJ25K80T
6	Air Discharge Adaptor		KDAJ25K56A	KDAJ25K71A



## OPTION LIST



## Outdoor Units

## VRV X

Optional Accessories		RX(Y)Q6ARY6(1) RX(Y)Q8ARY6(1) RX(Y)Q10ARY6(1)	RX(Y)Q12ARY6(1)	RX(Y)Q14ARY6(1) RX(Y)Q16ARY6(1)
Distributive piping	REFNET header	KHRP26M22H, (Max. 4 branch) KHRP26M33H (Max. 8 branch)	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch)	
	REFNET joint	KHRP26A22T KHRP26A33T	KHRP26A22T, KHRP26A33T, KHRP26A72T	

Optional Accessories		RX(Y)Q18ARY6(1) RX(Y)Q20ARY6(1)
Distributive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch)
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T

Optional Accessories		RX(Y)Q22ARY6(1)	RX(Y)Q24ARY6(1)	RX(Y)Q26ARY6(1) RX(Y)Q28ARY6(1) RX(Y)Q30ARY6(1) RX(Y)Q32ARY6(1)	RX(Y)Q34ARY6(1) RX(Y)Q36ARY6(1) RX(Y)Q38ARY6(1) RX(Y)Q40ARY6(1)
Distributive piping	REFNET header	KHRP26M22H (Max. 4 branch), KHRP26M33H (Max. 8 branch), KHRP26M72H (Max. 8 branch),	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch) (Max. 8 branch)		
	REFNET joint	KHRP26A22T, KHRP26M33T, KHRP26M72T,	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T		
Pipe size reducer		—	KHRP26M73TP, KHRP26M73HP		
Outdoor unit connection piping kit		BHFP22P1006			


Optional Accessories		RX(Y)Q42ARY6(1) RX(Y)Q44ARY6(1)	RX(Y)Q46ARY6(1) RX(Y)Q48ARY6(1) RX(Y)Q50ARY6(1) RX(Y)Q52ARY6(1) RX(Y)Q54ARY6(1) RX(Y)Q56ARY6(1) RX(Y)Q58ARY6(1) RX(Y)Q60ARY6(1)
Distributive piping	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch) (Max. 8 branch)	
	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T	
Pipe size reducer		KHRP26M73TP, KHRP26M73HP	
Outdoor unit connection piping kit		BHFP22P1516	



# CONTROL SYSTEMS



## SMART CONTROL FOR RESIDENTIAL OVERVIEW

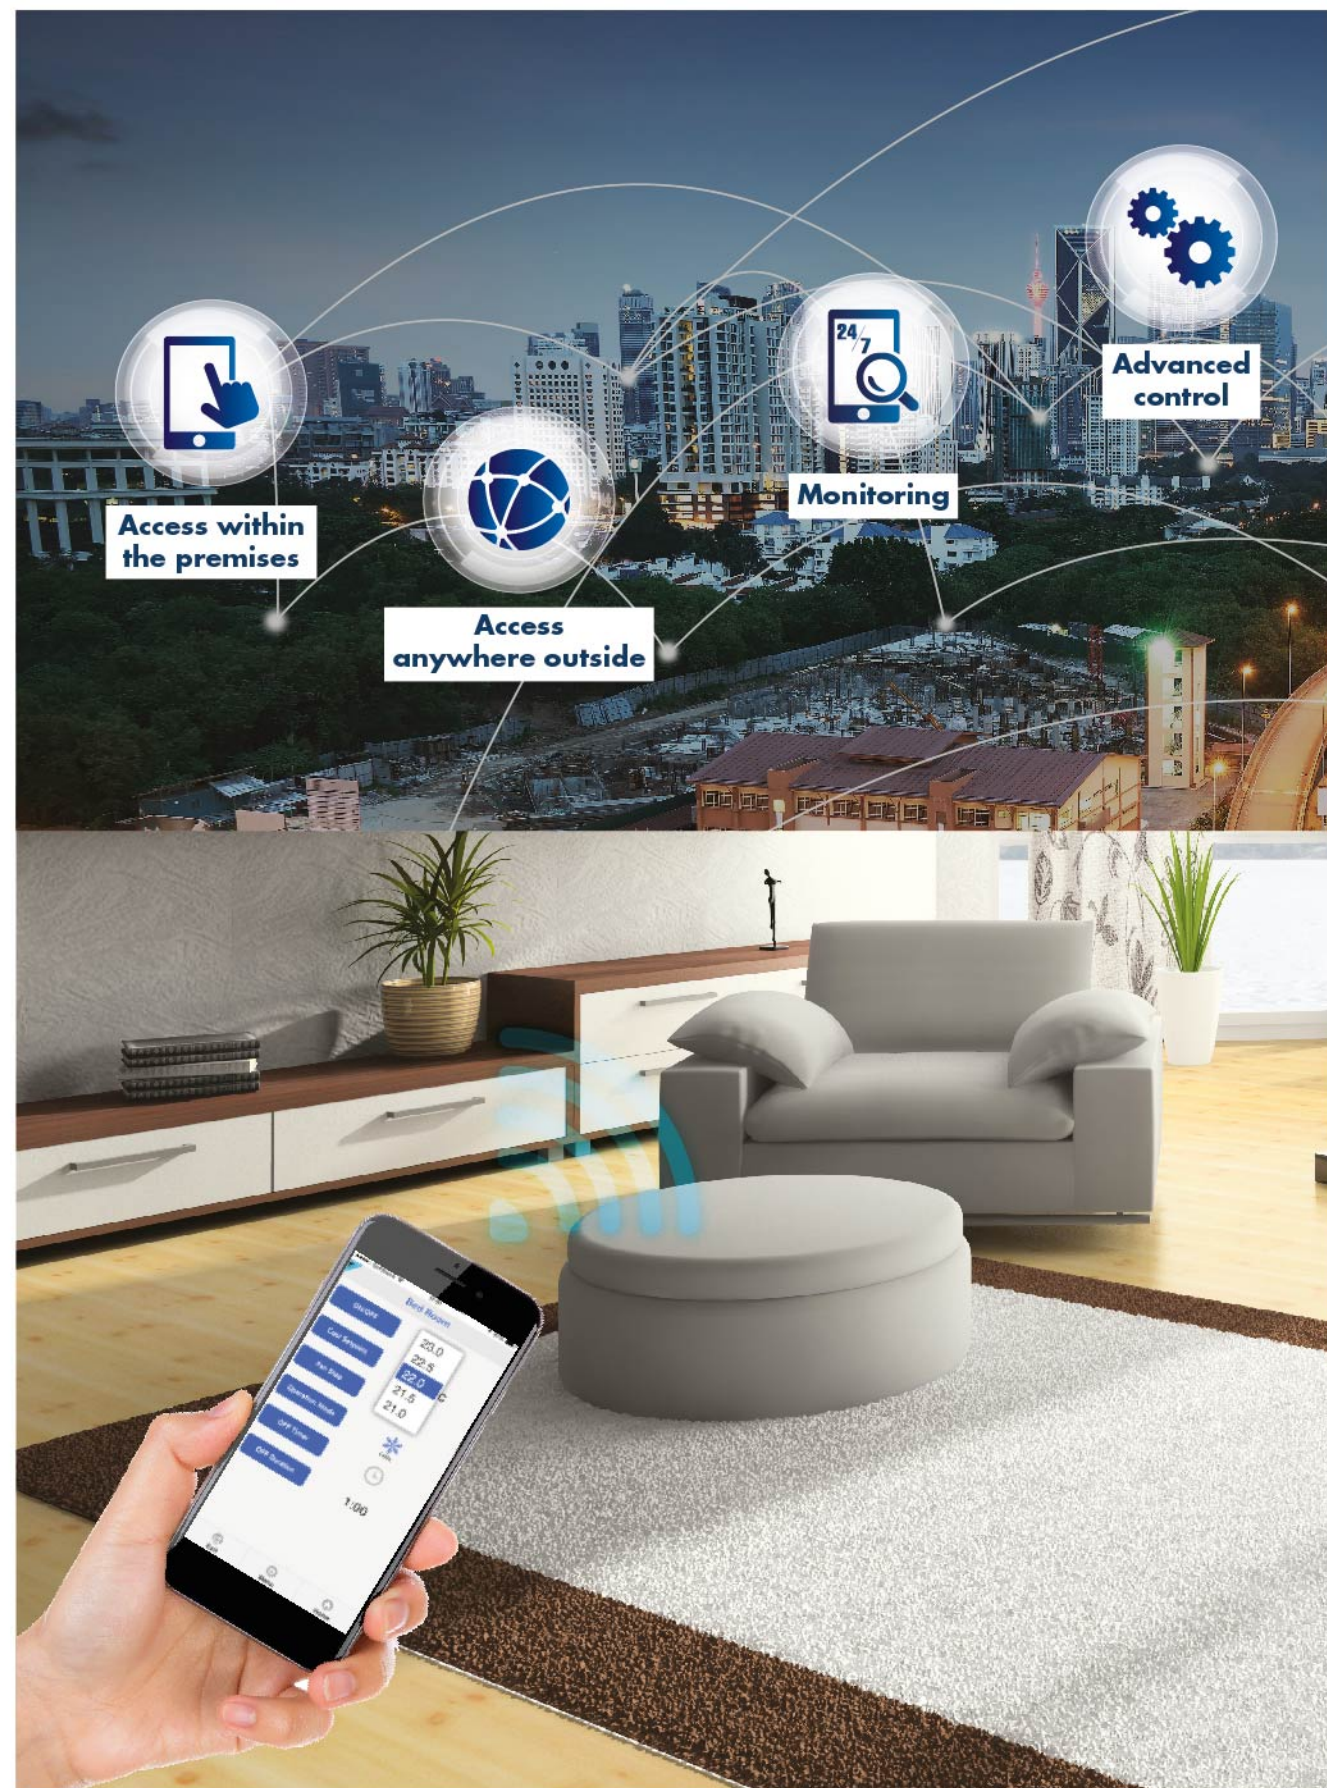**Access within the premises**

Daikin Smart Control SVM Series provides the ability of centralised control for Daikin VRV air conditioners throughout the home with a smartphone. Homeowners can control all of the core control functions in Daikin air conditioning system effortlessly from one room to another.

**Access anywhere outside**

With Daikin Smart Control SVM Series, the home temperature can be controlled from anywhere, and homeowners can always return from work or vacation to a comfortable cooling home. This also takes the pressure off homeowners on forgetting to switch off the air conditioners when away.

**Advanced control**

Daikin Smart Control SVM Series communicates with all of Daikin VRV air conditioners, allowing homeowners to access the core control functions on a smartphone, including temperature set points, operation mode, fan speed, airflow direction and error notification.

**Monitoring**

Homeowners can enjoy the peace of mind and convenience of monitoring air conditioners with Daikin Smart Control SVM Series from a smartphone.



## SMART CONTROL FOR RESIDENTIAL OVERVIEW

## CONTROL SYSTEMS



### For medium size apartments, condominiums and landed properties

- Connect up to 16 (32\*) Indoor Units
- Control and monitor VRV system from smartphone

\*Additional modbus adaptor (DTA116A51) is required



#### System Architecture

- SVM
- VRV Systems
- DTA116A51 (Modbus Card)
- Router
- Smartphone

#### DAIKIN Supplied Equipments

Model	Items
SVM	Application Controller
DTA116A51	MODBUS Adaptor

Note: wi-fi connection should be in customer scope

Category	Function	Detail
Access security	User login	User name, password
	Device registration	Registered device (Smartphone only) can be accessed through the internet
Main screen	Status monitoring	On/Off, Set point, Operation mode, Fan step, Flap, Error code
	Manual operation	On/Off, Set point, Operation Mode, Fan step, Flap
Automatic control	Off timer	One time off timer on/off
System setting	Language	English
	Password setting	Available
	User administration	Add/Modify/Delete user, Set User name, Password, Accessible points

### Individual Control Systems for VRV Indoor Units

#### Navigation remote controller (Wired remote controller) (Optional)



BRC1E63 & BRC1F61 (Only for FXEQ Series)


#### Clear display

- **Dot matrix display**

A combination of fine dots enables various icons. Large text display is easy to see.

- **Backlight display**

Backlight display helps operating in dark rooms.

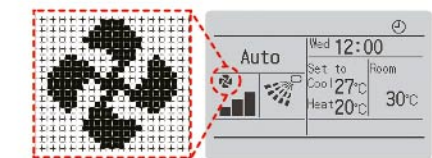

#### Simple operation

- **Large buttons and arrow keys**

Large buttons and arrow keys enable easy operation. Basic setting such as fan speed and temperature can be intuitively operated. For other settings, just select the function from the menu list.




- **Guide on display**

The display gives an explanation of each setting for easy operation.

#### Energy saving


- **Set point range set**

- Saves energy by limiting the min. and max. set temperature.
- Avoids excessive cooling or heating.
- This function is convenient when the remote controller is installed at a place where any number of people may operate it.



- **Set point auto-reset**


- Even if the set temperature is changed, it returns to the preset temperature after a preset period of time.
- Period selectable from 30 min/60 min/90 min/120 min.



- **Off timer**

- Turns off the air conditioner after a preset period of time.
- Period can be preset from 30 to 180 minutes in 10-minute increments.

#### Restaurant sample

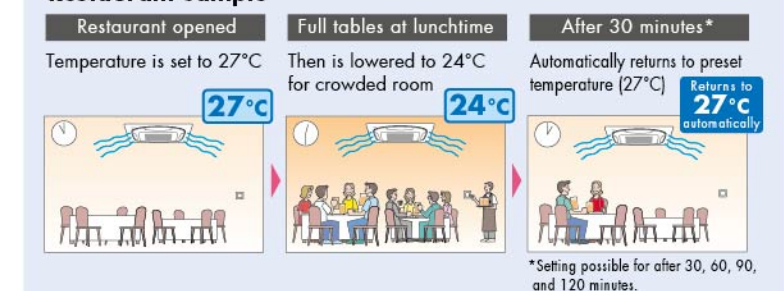

\*Setting possible for after 30, 60, 90, and 120 minutes.



## CONTROL SYSTEMS



## Individual Control Systems for VRV Indoor Units

## Convenience

## • Setback (default:OFF)

Maintains the room temperature in a specific range during an unoccupied period by temporarily starting air conditioner that was turned OFF.

Ex) Setback temperature Cooling : 35°C Recovery differential Cooling : -2°C  
When the room temperature goes above 35°C, the air conditioner starts operating in Cooling automatically.  
When room temperature reaches 33°C, the air conditioner turns OFF.


	Setback temperature	Recovery differential
Cooling	33—37°C	-2 — -8°C

## • Weekly schedule

- Five actions per day can be scheduled for each day of the week.
- The holiday function will disable schedule timer for the days that have been set as holiday.
- Three independent schedules can be set. (e.g. summer, winter, mid-season)

Schedule no. 1				
	Time	Act	Cool	Heat
Mon	8:30	ON	25°C	—
	10:00	OFF	—	—
	13:00	ON	25°C	—
	18:00	OFF	—	—


## College classroom sample (a summer Monday case)

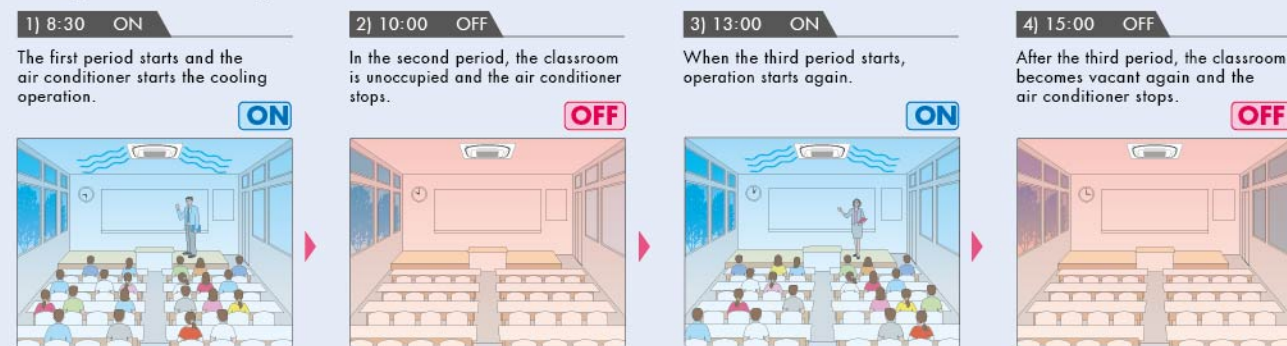

## Comfort

## • Individual airflow direction (\*1)

Airflow direction of each of the four air outlets can be controlled individually. (Positions 0 to 4, Swing, and No individual setting are selectable.)

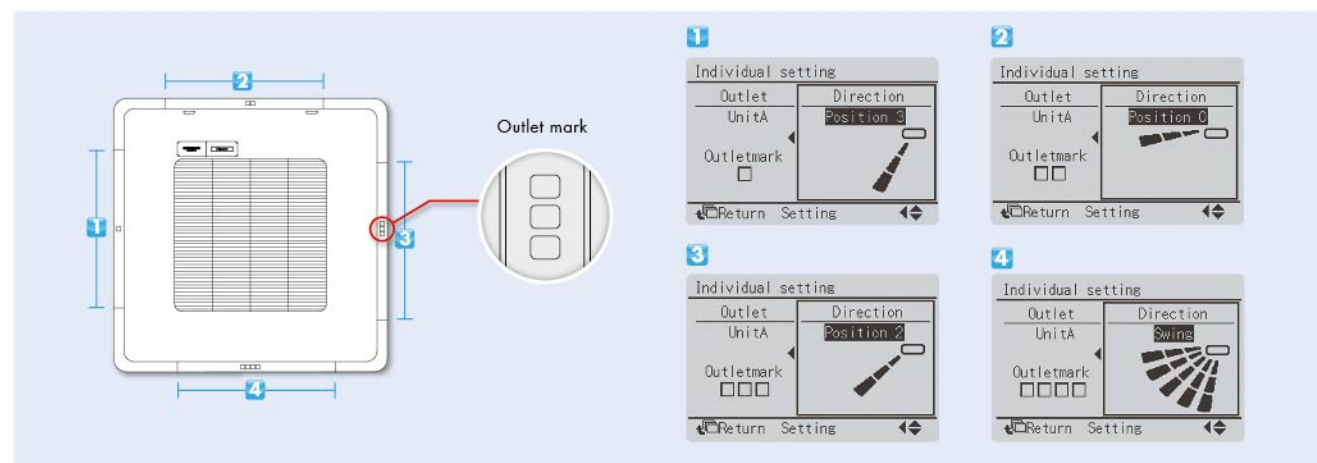

## • Auto airflow rate (\*2)

Airflow rate is automatically controlled in accordance with the difference between room temperature and set temperature.

\*1 Only available for VRV 4-Way Flow Ceiling Suspended type FXUQ-A series  
\*2 Only available for VRV 4-Way Flow Ceiling Suspended type FXUQ-A series

## Individual Control Systems for VRV Indoor Units

## Wired remote controller (Option)




BRC1C62

- Displays current airflow, swing, temperature operating mode and timer settings.

- Easier to read because LCD screen is larger.
- Digital display lets you set temperature in 1°C Units.
- Lets you individually programme by timer the respective times for operation start and stop within a maximum of 72 hours.
- Equipped with a thermostat sensor in the remote controller that makes possible more comfortable room temperature control.
- Enables you to select cool/heat/fan operation mode with the indoor remote controller of your choice without using the cool/heat selector.
- Constantly monitor malfunctions in the system for a min. of 40 items, and is equipped with a self-diagnosis function that lets you know through message immediately when a malfunction occurs.

- Lets you carry out various field setting by remote controller.
- Enables you to select the ventilation mode and the volume of the HRV.
- The rubber switch and the oil-resisting resin casing have been adopted for durability.
- When the auto-swing function is not available, the message, THIS FUNCTION IS NOT AVAILABLE is displayed when the wind direction adjustment button is pressed.

## The wired remote controller supports a wide range of control functions.

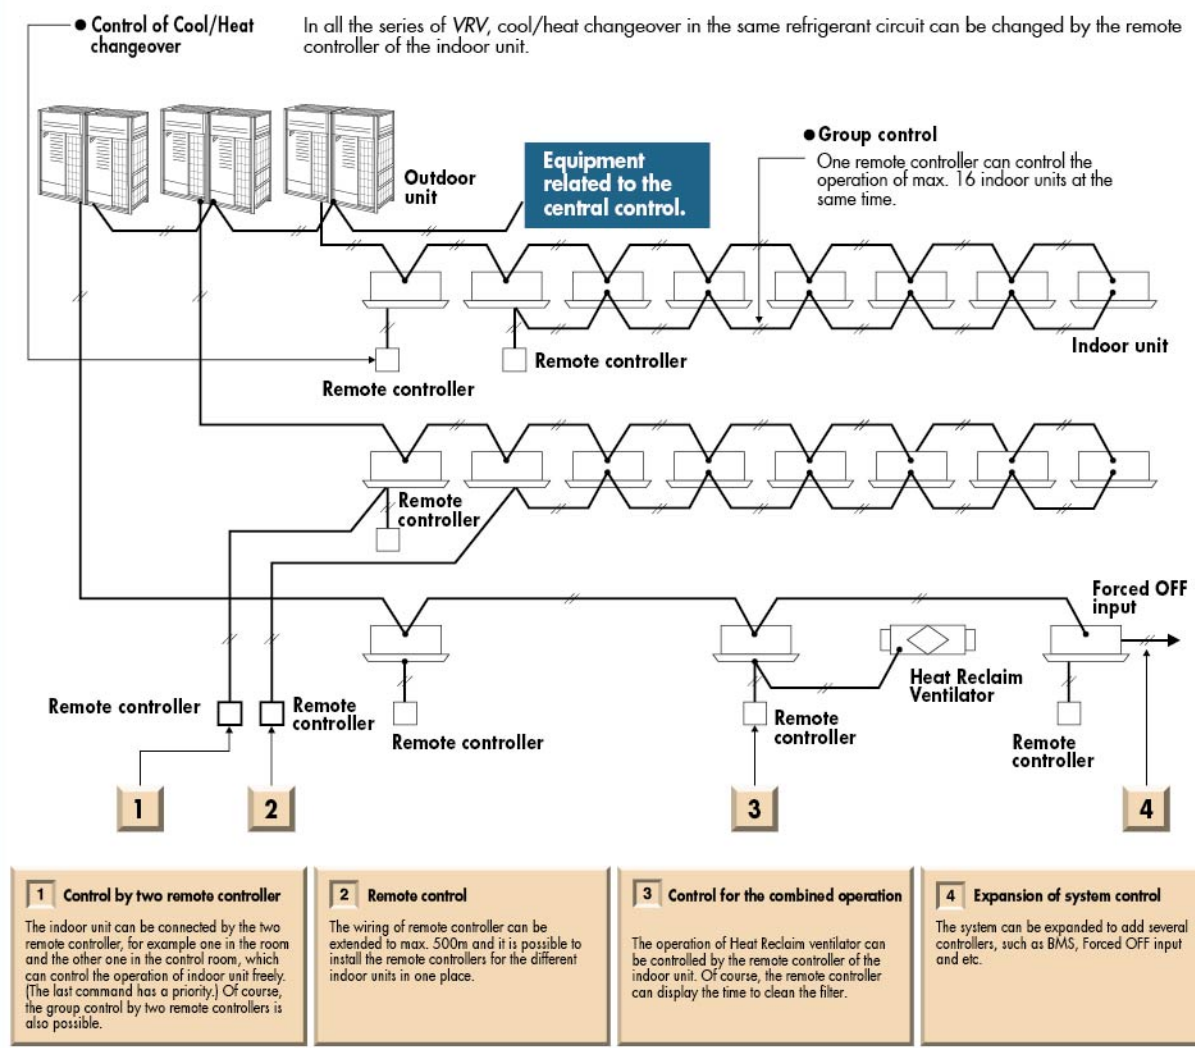

**1 Control by two remote controller**  
The indoor unit can be connected by the two remote controller, for example one in the room and the other one in the control room, which can control the operation of indoor unit freely. (The last command has a priority.) Of course, the group control by two remote controllers is also possible.

**2 Remote control**  
The wiring of remote controller can be extended to max. 500m and it is possible to install the remote controllers for the different indoor units in one place.

**3 Control for the combined operation**  
The operation of Heat Reclaim ventilator can be controlled by the remote controller of the indoor unit. Of course, the remote controller can display the time to clean the filter.

**4 Expansion of system control**  
The system can be expanded to add several controllers, such as BMS, Forced OFF input and etc.



## CONTROL SYSTEMS



## Individual Control Systems for VRV Indoor Units


## Wireless remote controller (Option)



- Then same operation mode and setting as with wired remote controllers are possible.  
\*Individual airflow direction, auto air-flow rate and sensing sensor control can be set only via wired remote controller BRC1E62. Cannot be set via other remote controllers.
- A compact signal receiver unit (separate type) to be mounted into wall or ceiling is included.
- A signal receiver unit (installed type) for a Ceiling Mounted Cassette (Round Flow, Compact Multi Flow, Double Flow) type, Ceiling Suspended Type and Wall Mounted type is mounted into the Indoor unit.



Signal receiver unit can be installed on the panel.  
Ex. Ceiling Mounted Cassette (Round Flow) type

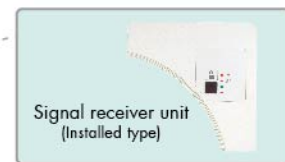

\*Wireless remote controller and signal receiver unit are sold as a set  
\*Refer to page 90 for the name of each model

## Simplified remote controller (Option)



Exposed type  
(BRC2C51)



Concealed type  
(For hotel use)  
(BRC3A61)

- The remote controller has centralised its frequently used operation selector and switches (in/off, operation mode, temperature setting and airflow volume), making itself suitable for use in hotel room or conference rooms.
- The exposed type remote controller is fitted with a thermostat sensor.




The concealed type remote controller smartly fits into a night or console panel in a hotel room.

## Wide variation of remote controller for VRV indoor unit

	FXFQ-S	FXZQ	FXCQ	FXUQ	FXEQ	FXDQ	FXMQ	FXHQ	FXAQ	FXL(N)Q
<b>Navigation remote controller</b> (Wired remote controller) BRC1E63	●	●	●	●	●	●	●	●	●	●
<b>Wired remote controller</b> (BRC1C62)		●		●		●	●	●	●	●
<b>Wireless remote controller*</b>	●	●	●	●	●	●	●	●	●	●
<b>Simplified remote controller</b> (Exposed type) (BRC2C51)						●	●			●
<b>Simplified remote controller</b> (Concealed type: for HOTEL use) (BRC3A61)						●	●			●

## Centralised Control Systems for VRV Indoor Units

- Up to 64 groups of indoor units (128 units) can be centrally controlled.
- Optional controllers for centralised control can be combined freely, and system can be designed in accordance with building scale and purpose.
- System integrated with various air conditioning peripheral equipment such as Heat Reclaim Ventilator is easy.
- Wiring can be run up to a length of 2km, and adapts easily to large-scale system expansion.

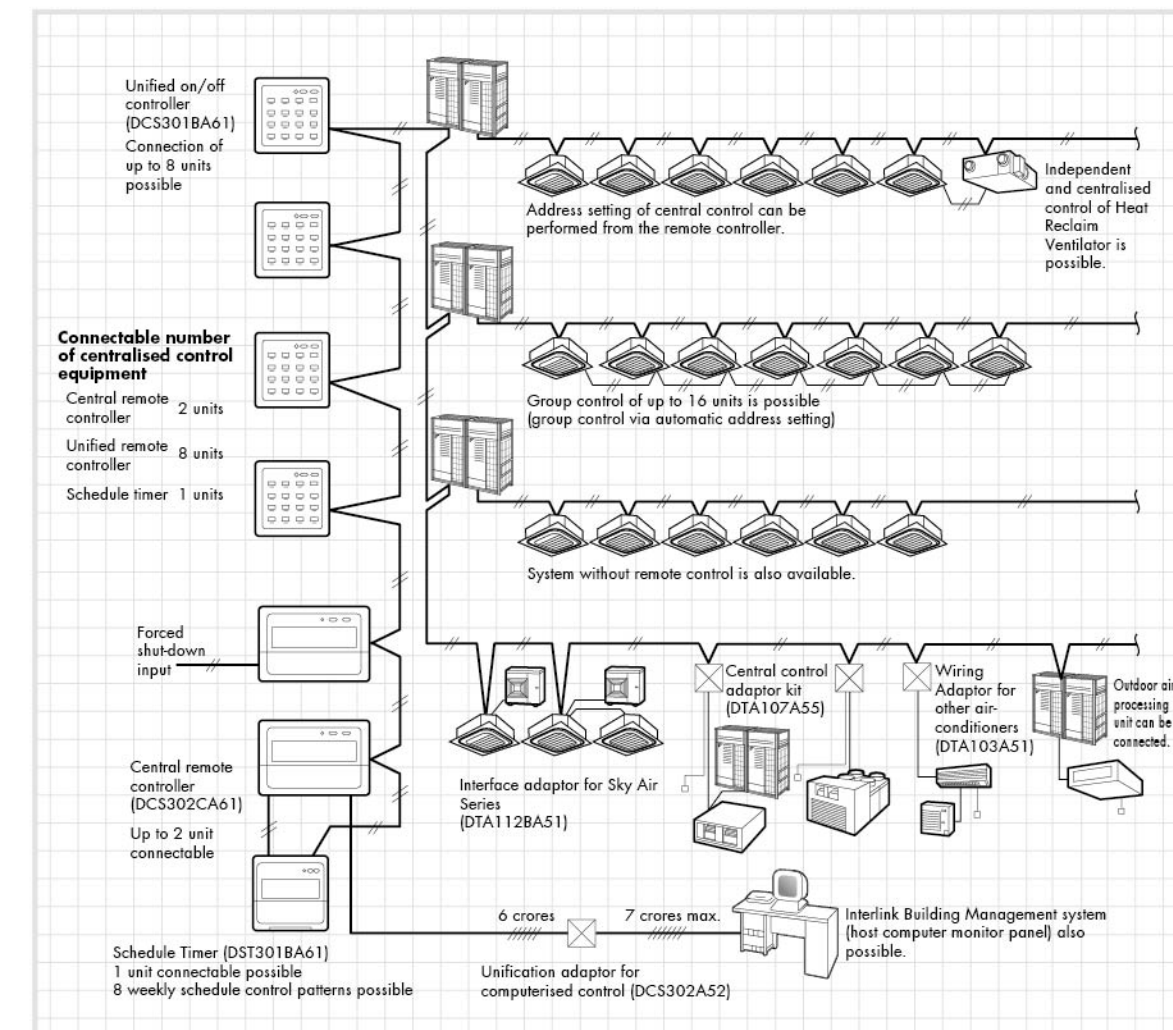

\* Certain indoor units limit the functions of some control systems.



## CONTROL SYSTEMS



## Centralised Control Systems for VRV Indoor Units

## Residential remote controller (Optional)




DCS303A51

**Max. 16 groups of indoor units can be easily controlled with the large LCD Panel.**

- Max. 16 group (128 indoor units) controllable.
- Backlight and large LCD panel for easy readability.
- ON/OFF, temperature setting and scheduling can be controlled individually for indoor units.
- All indoor units can be turned on or off at once with "ALL" button.
- Outside temperature display.

\*For residential use only. Cannot be used with other centralised control equipment.

## Central remote controller (Optional)

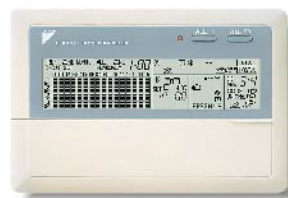

DCS302CA61

**Max. 64 groups(zones) of indoor units can be controlled individually same as LCD remote controller.**

- Max. 64 group (128 indoor units) controllable.
- Max. 128 group (128 indoor units) are controllable by using 2 central remote controllers, which can be controlled from 2 different places.
- Zone control.
- Malfunction code display.
- Max. wiring length 1,000m (Total: 2,000m).
- Connectable with Unified ON/OFF controller, schedule timer and BMS system.
- Airflow volume and direction can be controlled individually for indoor units in each group operation.
- Ventilation volume and mode can be controlled for Heat Reclaim Ventilator.
- Up to 4 ON/OFF pairs can be set per day by connecting a schedule timer.

## Unified ON/OFF controller (Optional)



DCS301BA61

**Max. 16 groups of indoor units can be operated simultaneously/individually.**

- Max. 16 group (128 indoor units) controllable.
- 2 remote controllers can be used to control 2 different places.
- Operating status indication (Normal Operation, Alarm).
- Centralised control indication.
- Max. wiring length 1,000m (Total: 2,000m).
- Compact size casing (Thickness: 16mm).
- Connectable with Central Remote controller, Schedule timer and BMS system.

## Schedule timer (Optional)



DST301BA61

**Max. 128 indoor units can be operated as programmed schedule.**

- Max. 128 indoor units controllable.
- When used in combination with a central remote controller, a maximum of 8 weekly schedule patterns can be set, while the central controller can be used to select desired zones. Up to 2 ON/OFF pairs can be set per day.
- Max. 8 hours back-up power supply.
- Max. wiring length 1,000m (Total: 2,000m).
- Compact size casing (Thickness: 16mm).
- Connectable with Central Remote controller, Unified ON/OFF controller and BMS system.

## Advanced Control Systems for VRV Indoor Units



**One touch selection enables flexible control of equipment in a building.**



DCM601A51

Various types of equipment in a building can be controlled by a single controller.

## Individual air-conditioning control

The flexible control achieved by the VRV system precisely meets different air conditioning needs in each room (e.g. offices, conference rooms, hotel rooms).


Lighting control **DALI-compatible**

DALI-compatible LED lighting systems can be controlled and monitored. Lighting control is enhanced through an interlock function with air conditioners and other functions.



## Air conditioning control for large spaces

Air handling units can also be controlled. Large spaces, such as entrance halls and shopping malls, can be easily controlled to ensure comfort.

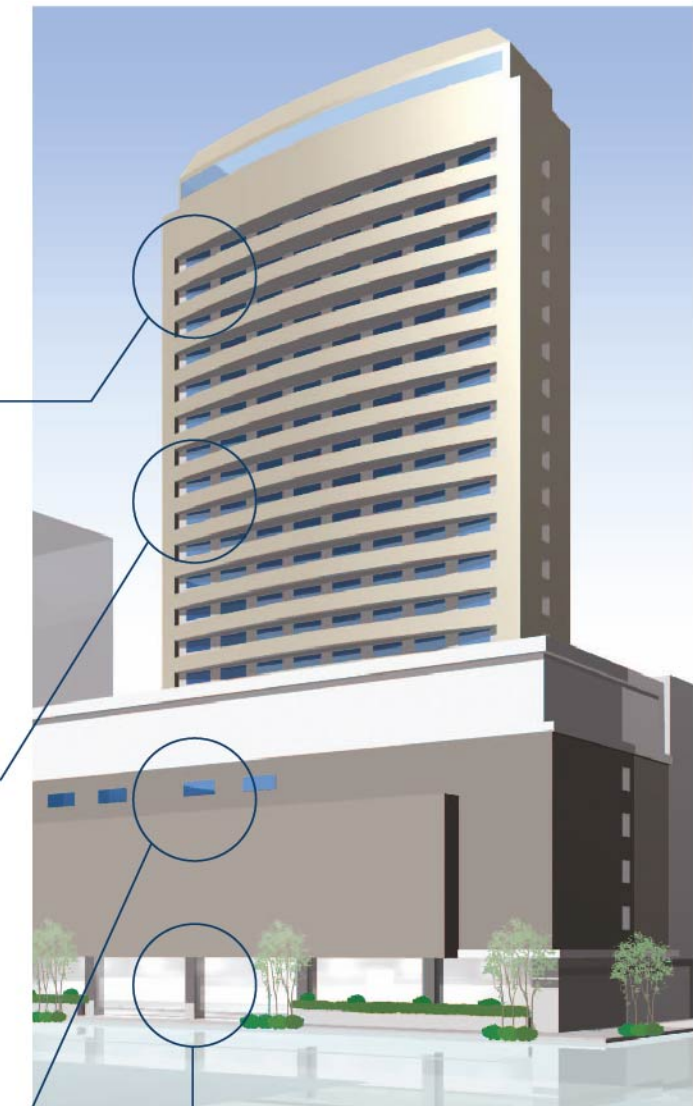

## Building equipment control

Various types of equipment other than air conditioners, including ventilators, fans, and pumps, can also be controlled.



Pump



Fan



## CONTROL SYSTEMS



### For Energy Saving & Comfort

#### Intelligent Touch Manager maximises the advantages of VRV features

Intelligent Touch Manager is an advanced multi-zone controller that provides the most cost-effective way to control and monitor the Daikin VRV system.


The 10.4" LCD touch screen is easy to use with three different screen views to include the floor plan layout view, icon view and list view and menus for system configurations.

It is also easy to use with standardised remote Web Access from your PC.

It can manage a total of 650 management points consisting of up to 512 Daikin indoor unit groups

(up to 1024 indoor units) along with building equipment control / monitoring with Digital Inputs / Output

(Di/Dio), Analog Inputs / Output (Ai/Ao) and Pulse input (Pi) optional devices.

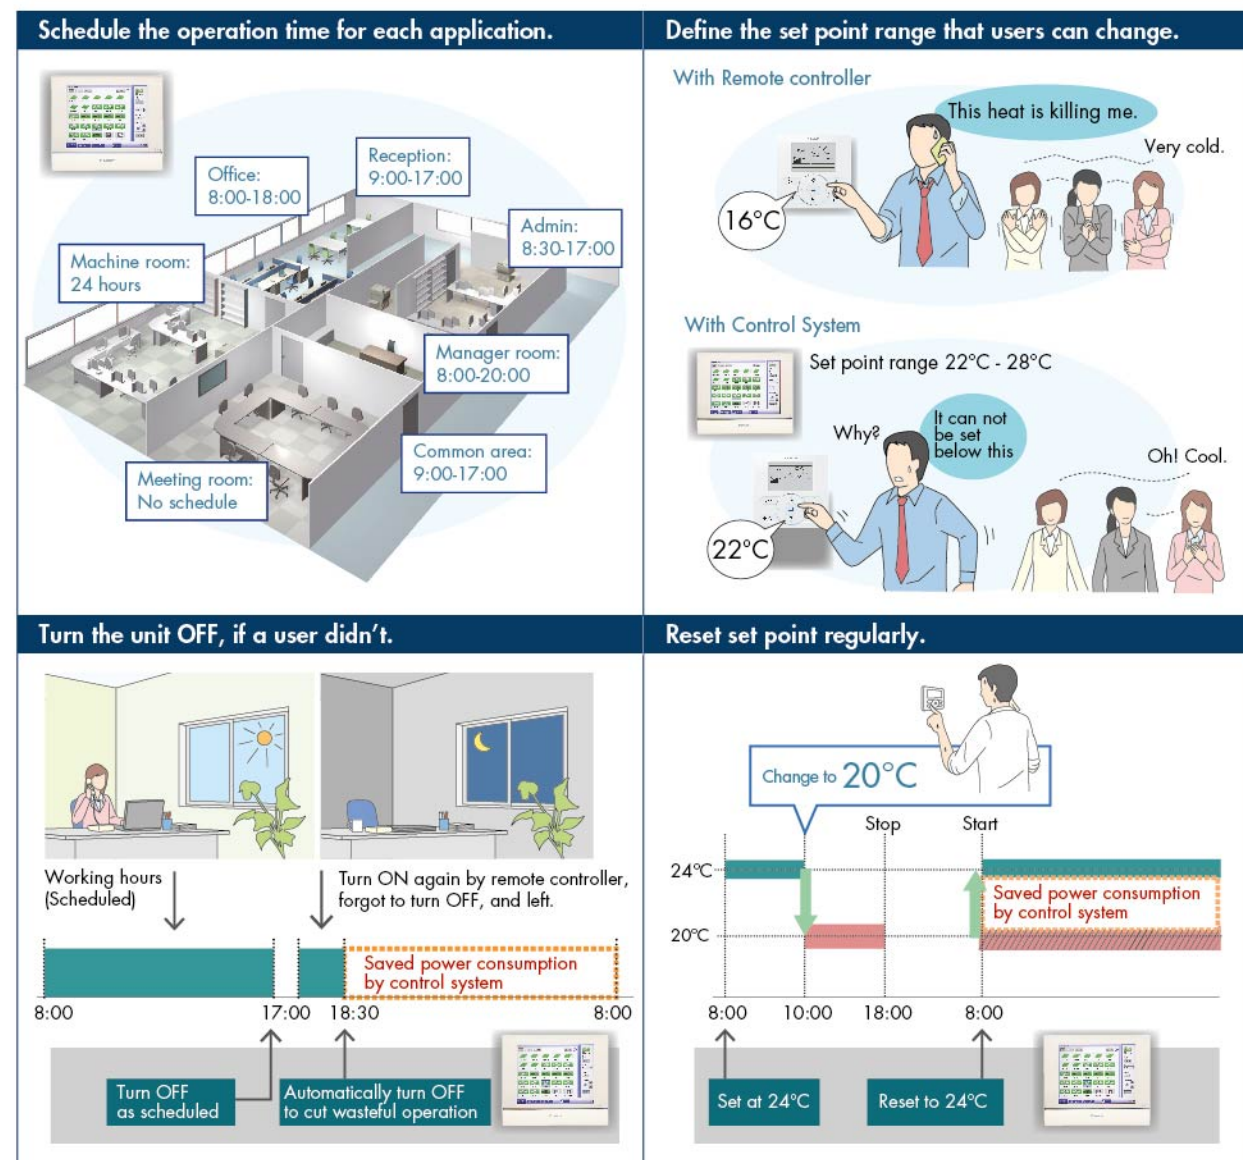

### Advanced Control Systems for VRV Indoor Units

In addition to switching lights on and off, advanced lighting control, such as illuminance adjustment, can be achieved

#### Lighting control (Optional)


Connection to DALI - compatible lighting control system

Simple wiring (daisy chain) enables management of LED lighting by the *Intelligent Touch Manager*.

Various air conditioning and lighting control is enabled through the interlock with occupancy sensors and illuminance sensors.

**DALI-compatible**

Please contact your local sales office for details.

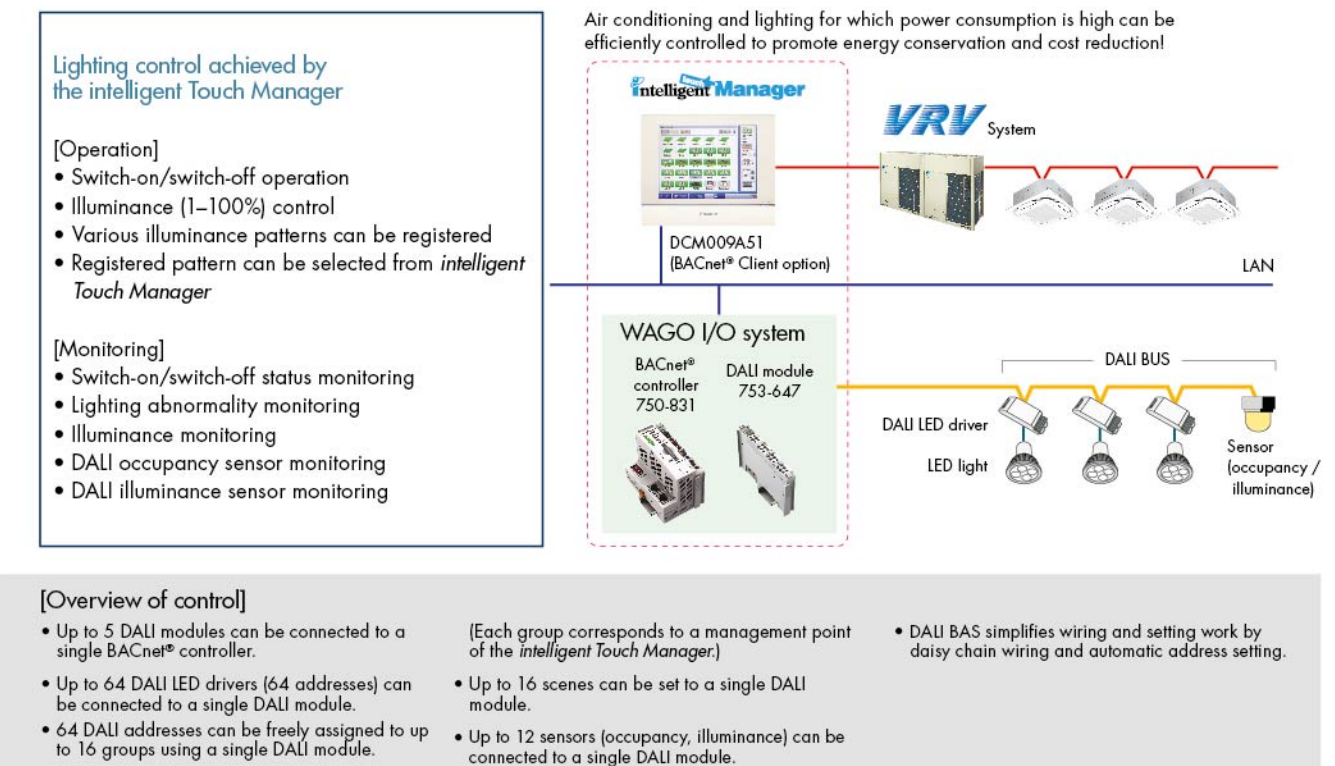

### Easy maintenance and energy saving by lighting control

#### Case 1


Switch-on / switch-off and illuminance are controlled based on a schedule to cut wasteful power consumption.

- Failing to switch off lights is prevented.



#### Case 2


Occupancy sensors are used to eliminate both wasteful lighting and air conditioning. When a room is unoccupied, the air conditioning stops and the lighting is switched off.

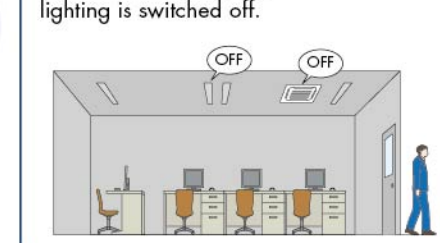

#### Case 3

Lighting abnormalities (e.g. burned-out bulbs) can be checked on the *Intelligent Touch Manager* screen.

Lighting maintenance becomes easier and quicker.

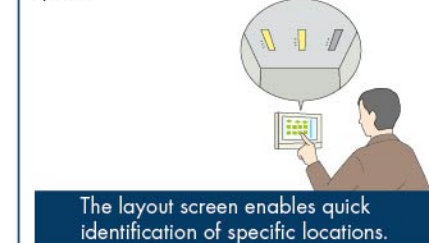



## CONTROL SYSTEMS



## Tenant Management (PPD Option)

### Reporting the power consumption of VRV system for each tenant


#### With the PPD function, power consumption can be calculated for each indoor unit (Optional)

The energy consumption is proportionally calculated for each indoor unit. The data can be used for energy management and calculation of air conditioning usage fees for respective tenants.

Operational information of individual indoor units are monitored, based on distribution of power consumption of outdoor units.

Daikin's PPD keeps track of power distribution for each indoor unit. It performs air conditioning billing calculations quickly and automatically.

It is easy to output PPD data.  
PPD data is output in CSV format to a PC or USB memory device and can be freely processed and managed.

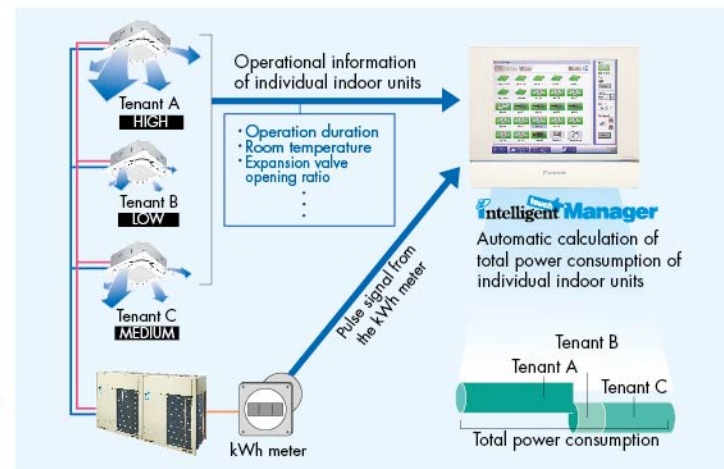

\*PPD (Power Proportional Distribution) is Daikin's proprietary calculation method.


### Air conditioning bills can be issued by one click

#### Electricity bills can be easily calculated for each tenant (Optional)

The power consumption of VRV controlled by the intelligent Touch Manager can be easily managed for each tenant using a PC. The electricity bill settings facilitate billing work through easy calculation and issuance of VRV electricity bills.

##### [ Main functions ]


- Register tenants
- Set the electricity unit price for 5 time zones
- Calculate power consumption and electricity charge for each tenant
- Show aggregation results in the specified period for each tenant
- Output the results (Printout and CSV file)

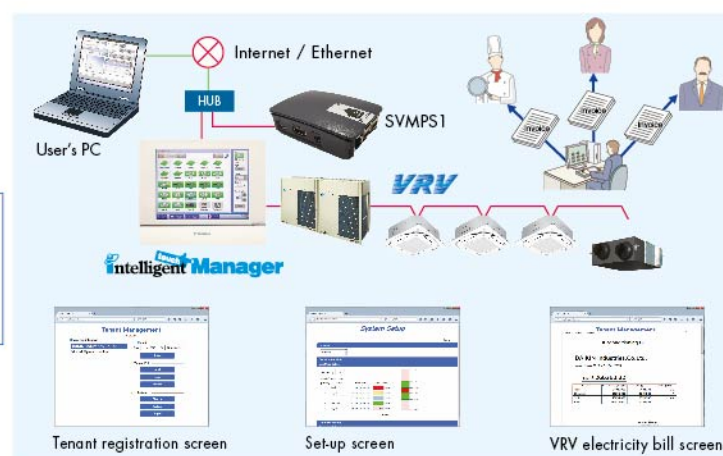

## Advanced Control Systems for VRV Indoor Units

### System structure

#### intelligent Touch Manager System Overview

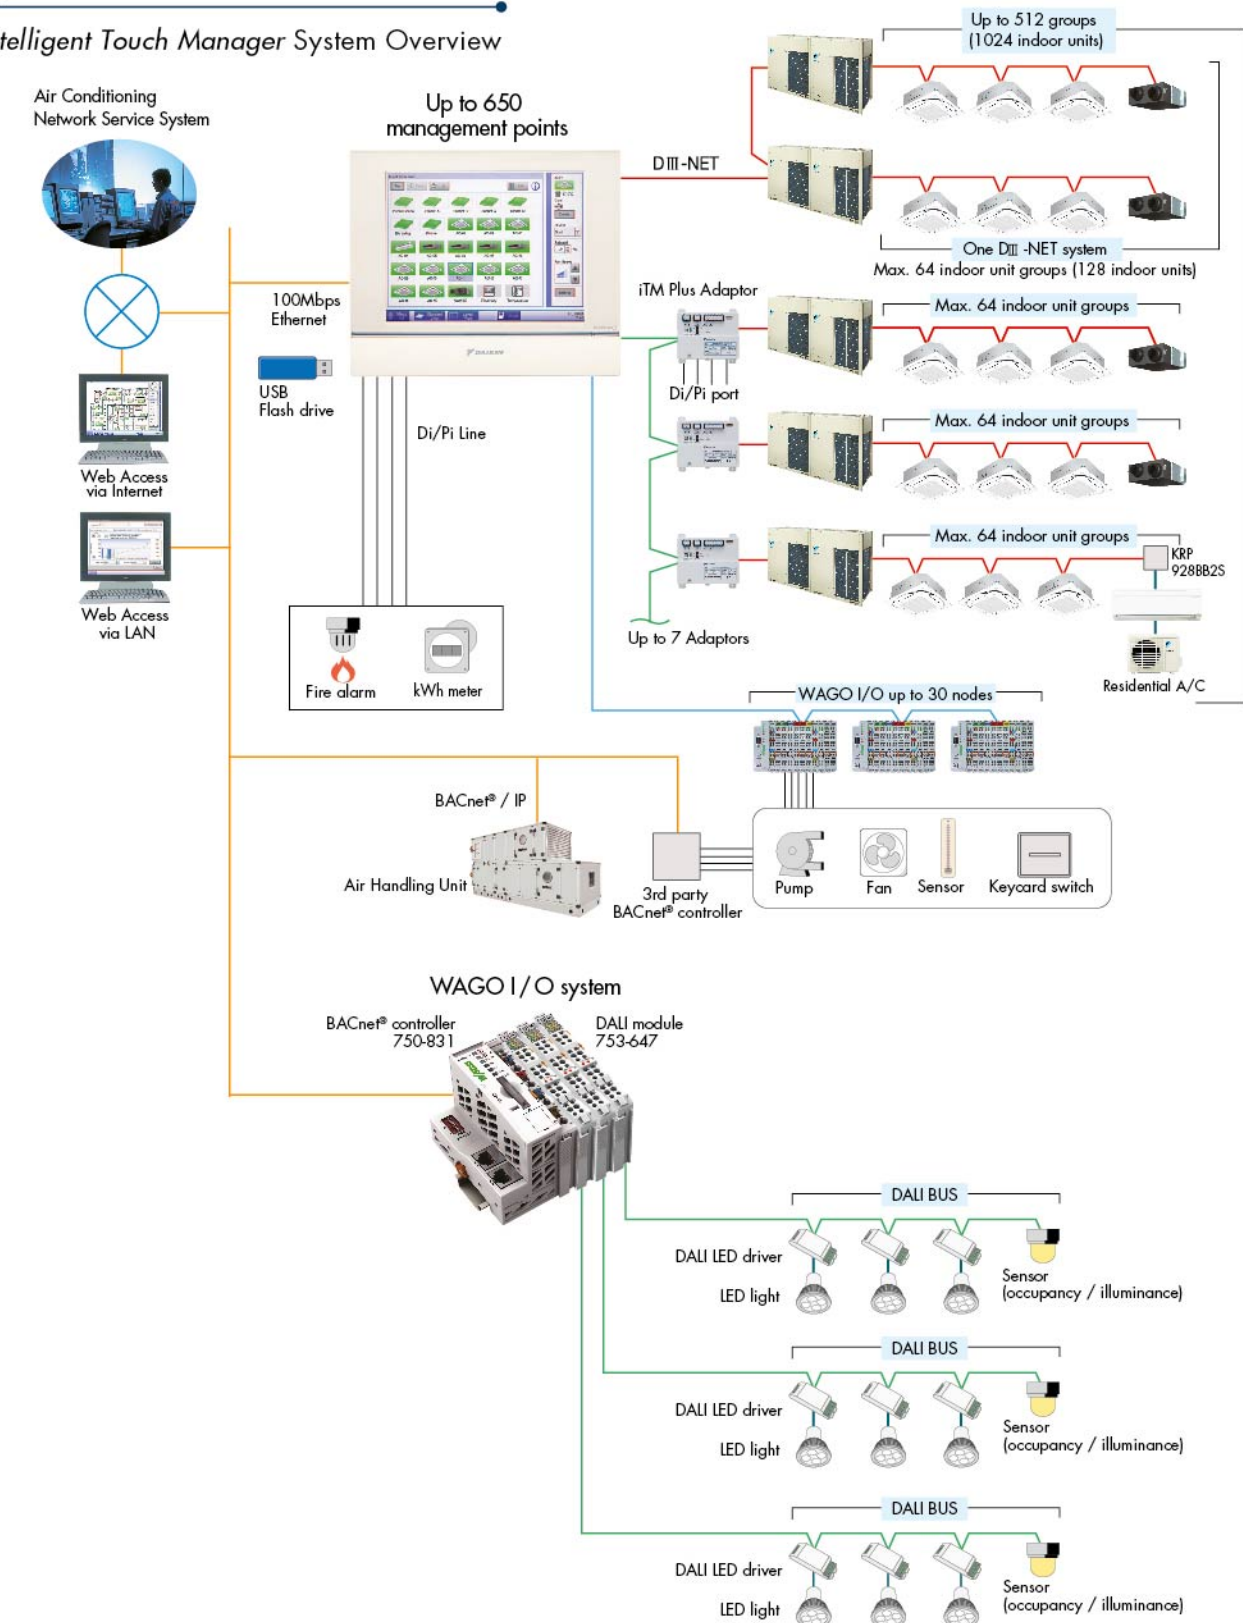



# CONTROL SYSTEMS




## Air Conditioning Network Service System

### Preventive Maintenance

The *intelligent Touch Manager* can be connected to Daikin's own Air Conditioning Network Service System for remote monitoring and verification of operation status for VRV system. By its ability to predict malfunctions, this service provides customers with additional peace of mind.

### Enhanced convenience with link to the Air Conditioning Network Service System

The *intelligent Touch Manager* connects seamlessly to Daikin's 24-hour Air Conditioning Network Service System.

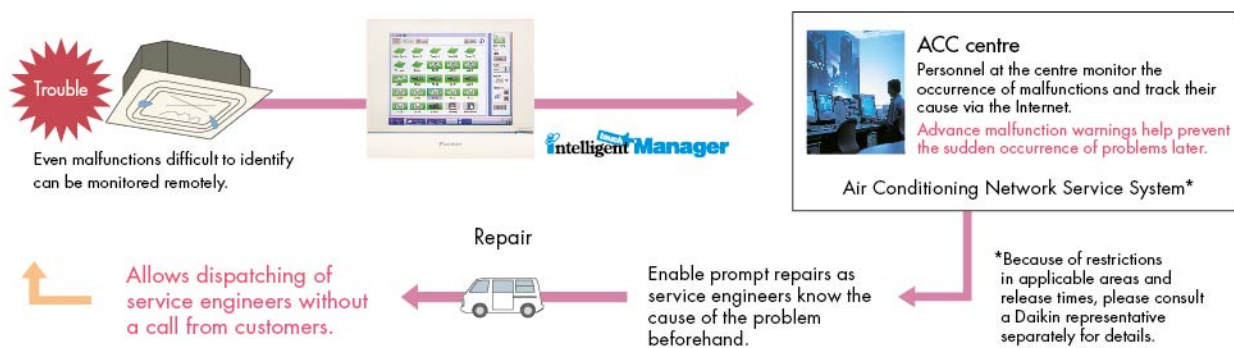

## Daikin Offers a Variety of Control Systems

Convenient controllers that offer more freedom to administrators



DCS601C51

### Intelligent Controller

Ease of use and expanded control functions  
The user-friendly controller features colours, multilingual function, and icons in the display for ease of understanding. A wide variety of control methods can be accommodated, permitting administrators to monitor and operate the system even when they are away from the controller.

### Connect VRV system to your BMS via BACnet® or LONWORKS®

Compatible with BACnet® and LONWORKS®, the two leading open network communication protocols, Daikin offers interfaces that provide a seamless connection between VRV system and your BMS.



DMS502B51  
(Interface for use in BACnet®)

BACnet®  
Seamless connection between VRV system and BACnet® open network protocol.




DMS504B51  
(Interface for use in LONWORKS®)

LONWORKS®  
Facilitating the network integration of VRV system and LONWORKS®

Dedicated interfaces make Daikin air conditioners freely compatible with open networks

Notes: 1. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).  
2. LONWORKS® is a trademark of Echelon Corporation registered in the United States and other countries.

## Modbus Interface Adaptor

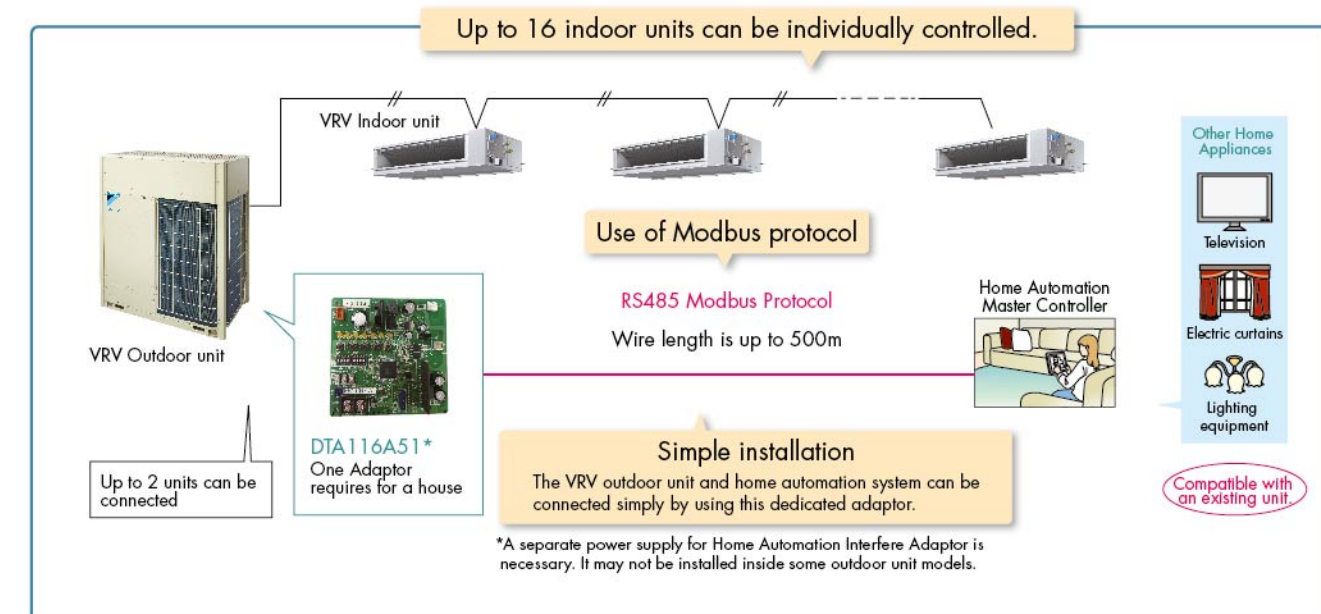




## CONTROL SYSTEMS



## Integrated Building Monitoring System

The high speed transmission of DIII-NET enables more advanced control of the VRV system, providing you with enhanced comfort.

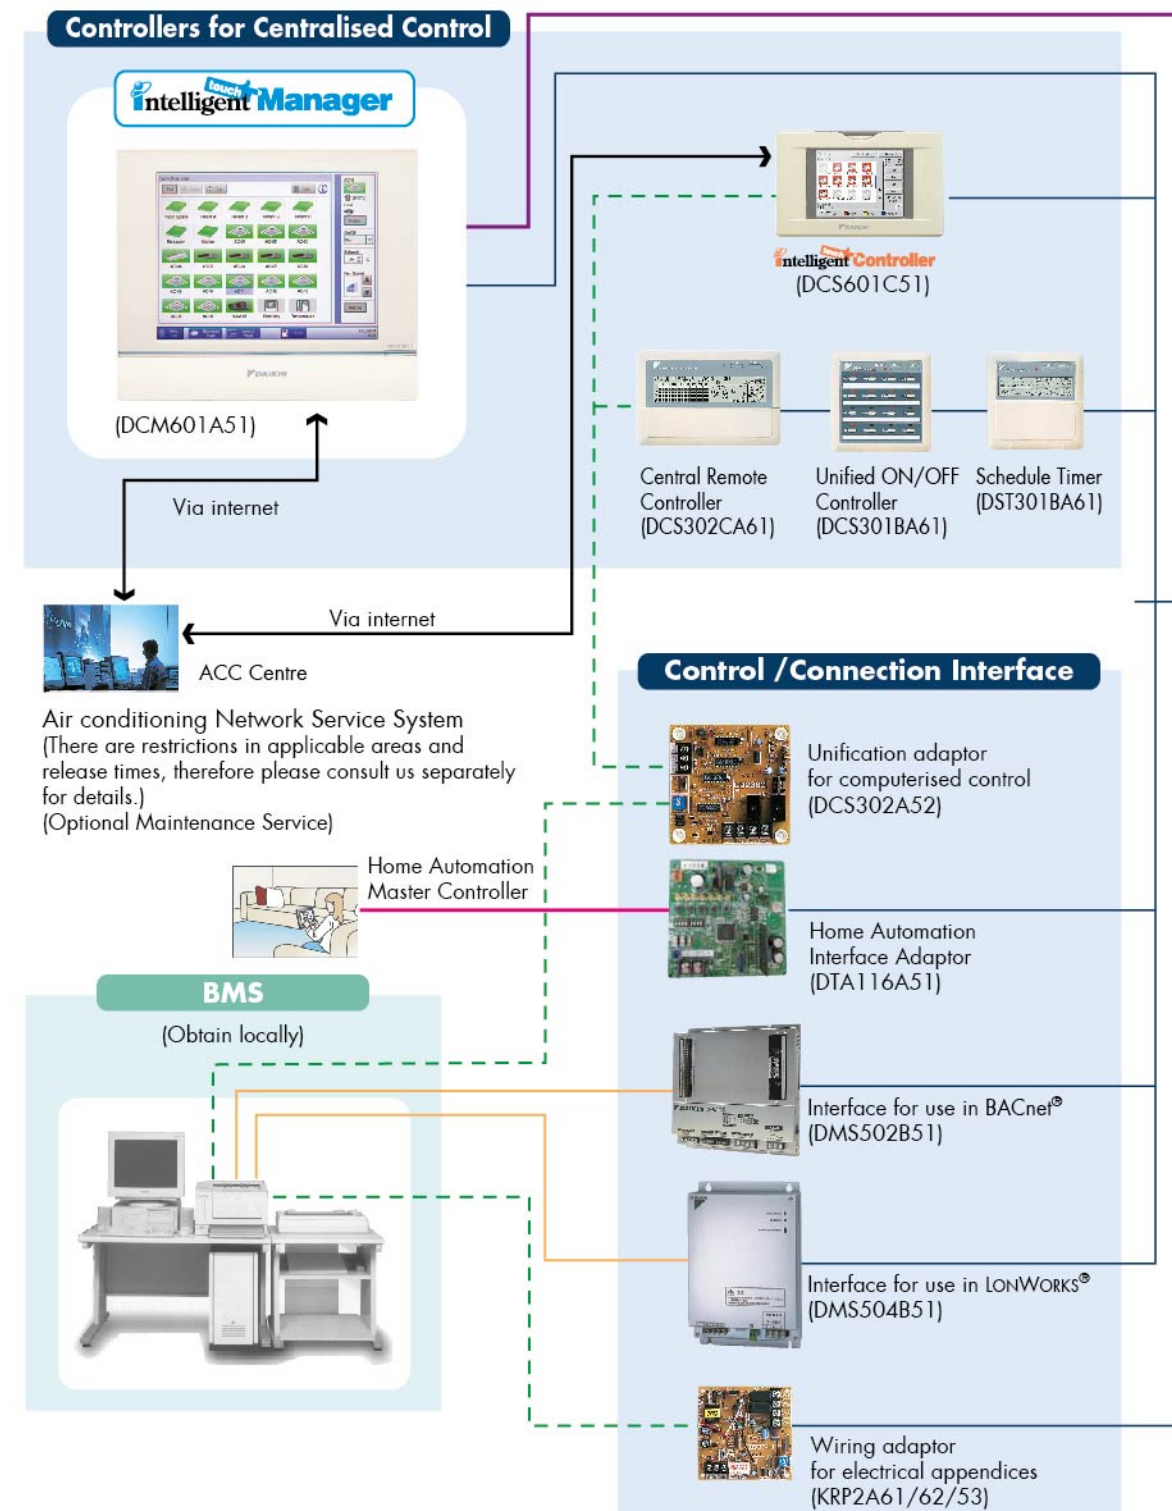

## Integrated Building Monitoring System

- DIII-NET Line
- BACnet®/Ethernet or LONWORKS® Network Communication Line
- Contact Signal Line
- RS485 Modbus Line
- WAGO Connection

The DIII-NET system provides for:

- Close control and monitoring by integrating a wide variety of air conditioners in the entire building.
- Saving the in-building cabling using non-polar, two-wire cables. Easier wiring work with tremendously fewer wiring errors.
- Additional set-ups readily up and running. An extendable cabling up to 2 km in total.
- Different control equipment flexibly joined in the system for hierarchical risk diversification.
- Daikin's total heat exchangers and other devices all under integral control.

**Caution:**

Limitation may apply to some models and functions. Please contact your local sales office for details. Consultation is necessary before employing this control system. Please contact your local sales office before making a purchase.

**Note:** BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). LONWORKS® is a trademark of Echelon Corporation registered in the United States and other countries.



## CONTROL SYSTEMS



## Option List

## Operation Control System Optional Accessories

## For VRV indoor unit use

No.	Item	Type	FXFSQ-A (For Black Panel)	FXFSQ-A	FXZQ-M	FXUQ-A	FXCQ-M	FXDQ-PD FXDQ-ND
1	Remote controller	Wireless Receiver Handset	BRC7M634K	BRC7M632F-6 BRC4M150W16	BRC7M630W-6	BRC7CB58	BRC7M65	BRC4M61-6 BRC4M150W16
2	Navigation remote controller (Wired remote controller)	Wired	BRC1E63		BRC1C62		BRC1E63 Note 7	
3	Simplified remote controller (Exposed type)		—		—		BRC2C51	
4	Remote controller for hotel use (Concealed type)		—		—		BRC3A61	
5	Adaptor for wiring		★KRP1C63	★KRP1BA57	—	★KRP1B61	★KRP1B56	★KRP1B56
6-1	Wiring adaptor for electrical appendices (1)		★KRP2A62	★KRP2A62	—	★KRP2A61	★KRP2A53	★KRP2A53
6-2	Wiring adaptor for electrical appendices (2)		★KRP4AA53	★KRP4AA53	★KRP4AA53	★KRP4AA51	★KRP4A54	★KRP4A54
7	Remote sensor (for indoor temperature)		KRCS01-4B	KRCS01-1B				
8	Installation box for adaptor PCB ☆		Note 2, 3 KRP1H98	Note 4, 6 KRP1BA101	KRP1BA97	Note 2, 3 KRP1B96	Note 4, 6 KRP1BA101	Note 4, 6 KRP1BA101
9	External control adaptor for outdoor unit		★DTA104A62	★DTA104A62	—	★DTA104A61	★DTA104A53	★DTA104A53
10	Adaptor for multi tenant		★DTA114A61					

No.	Item	Type	FXMQ-P/ FXMQ-ARV	FXMQ-NVE	FXHQ-MA	FXAQ-A	FXLQ-MA FXNQ-MA
1	Remote controller	Wireless Receiver Handset	BRC4M61-6 BRC4M150W16	BRC7EA63W	BRC7N618-6	BRC4M150W16	BRC4M61-6
2	Navigation remote controller (Wired remote controller)	Wired	BRC1C62		BRC1E63 Note 7		BRC1D61
3	Wired remote controller with weekly schedule timer		BRC2C51		BRC3A61		BRC3A61
4	Simplified remote controller (Exposed type)		BRC2C51		BRC3A61		BRC3A61
5	Remote controller for hotel use (Concealed type)		BRC2C51		BRC3A61		BRC3A61
6	Adaptor for wiring		★KRP1C64	KRP1B61	KRP1BA54	—	KRP1B61
7-1	Wiring adaptor for electrical appendices (1)		★KRP2A61	KRP2A61	★KRP2A61	★KRP2A61	KRP2A61
7-2	Wiring adaptor for electrical appendices (2)		★KRP4AA51	KRP4AA51	★KRP4AA52	★KRP4AA52	KRP4AA51
8	Remote sensor (for indoor temperature)		KRCS01-4B	—	—	KRCS01-1B	—
9	Installation box for adaptor PCB ☆		Note 1 KRP4A96	—	Note 3 KRP1CA93	Note 1 KRP4AA93	—
10	External control adaptor for outdoor unit		★DTA104A61	DTA104A61	★DTA104A62	★DTA104A61	DTA104A61
11	Adaptor for multi tenant		★DTA114A61	—	—	★DTA114A61	—
12	External control adaptor for cooling/heating		—		—		—
13	Remote controller with key		—		—		—

## Function List

## Round Flow with Sensing Type

Remote controller	Wired	Wireless	FXFSQ-A BRC1E63
Dual sensors *1			○
Direct airflow *1			○
Sensing sensor low mode *1			○
Sensing sensor stop mode *1			○
Circulation airflow			○
Individual airflow direction control			○
Switchable 5 step fan speed			○
Auto-airflow rate			○
Auto-swing			○
Swing pattern selection			○
High ceiling application			○

## Notes:

1. Installation box ☆ is necessary for each adaptor marked ★.
2. Up to 2 adaptors can be fixed for each installation box.
3. Only one installation box can be installed for each indoor unit.
4. Up to 2 installation boxes can be installed for each indoor unit.
5. Installation box ☆ is necessary for second adaptor.
6. Installation box ☆ is necessary for each adaptor.
7. Individual airflow direction, auto airflow rate and sensing sensor control can be set only via wired remote controller BRC1E62/BRC1E63. Cannot be set via other remote controllers.
8. Since the control panel is equipped as standard, use the option for 2 remote control system.
9. When using BRC1E62/BRC1E63, be sure to remove the control panel and since BRC1E62/BRC1E63 cannot be stored inside the indoor unit, please place it separately.

## Option List

## System Configuration

No.	Item	Type	Model No.	Function
1	Residential central remote controller		Note 2 DCS303A51	• Up to 16 groups of indoor units (128 units) can be easily controlled using the large LCD panel. ON/OFF, temperature settings and scheduling can be controlled individually for indoor units.
2	Central remote controller		DCS302CA61	• Up to 64 groups of indoor units (128 units) can be connected, and ON/OFF, temperature setting and monitoring can be accomplished individually or simultaneously. Connectable up to 2 controllers in one system.
2-1	Electrical box with earth terminal (3 blocks)		KJB311AA	• Up to 16 groups of indoor units (128 units) can be turned, ON/OFF individually or simultaneously, and operation and malfunction can be displayed. Can be used in combination with up to 8 controllers.
3	Unified ON/OFF controller		DCS301BA61	
3-1	Electrical box with earth terminal (2 blocks)		KJB212AA	
3-2	Noise filter (for electromagnetic interface use only)		KEK26-1A	• Programmed time weekly schedule can be controlled by unified control for up to 64 groups of indoor units (128 units). Can turn units ON/OFF twice per day.
4	Schedule timer		DST301BA61	• Up to 5 indoor units can be controlled. This is a low cost system which can only control ON/OFF.
5	5-room centralised controller for residential indoor units	For CDXS, FDK(X)S, FTK(X)S	Note 3 KRC72A	• Adaptors required to connect products other than those of the VRV System to the high-speed DIII-NET communication system adopted for the VRV System.
6	Interface adaptor for residential indoor units	For CDXS, FDK(X)S, FTK(X)S	KRP928BB2S	
7	Interface adaptor for SkyAir-series	For FCQ-B, FFQ-B, FHQ-BV, FBQ-B	★DTA112BA51	
8	Central control adaptor kit	For UAT(Y)-K(A), FD-K	★DTA107A55	* To use any of the above optional controllers, an appropriate adaptor must be installed on the product unit to be controlled.
9	Wiring adaptor for other air-conditioner		★DTA103A51	
10	DIII-NET Expander Adaptor		DTA109A51	• Up to 1024 units can be centrally controlled in 64 different groups.
10-1	Mounting plate		KRP4A92	• Wiring restrictions (max. length: 1,000m, total wiring length: 2,000m, max. number of branches: 16) apply to each adaptor.
				• Fixing plate for DTA109A51

Note: 1. Installation box for ★ adaptor must be obtained locally.

2. For residential use only. Cannot be used with other centralised control equipment.

3. A wiring adaptor (KRP413AB15) is also required for each indoor unit.

## Building Management System

No.	Item	Model No.	Function
1	intelligent Touch Controller	DCS601C51	• Air conditioning management system that can be controlled by a compact all-in-one unit.
1-1	Option	Hardware	DIII-NET plus adaptor
1-2	Electrical box with earth terminal (4 blocks)	KJB411A	• Wall embedded switch box.
2	intelligent Touch Manager	DCM601A51	• Air conditioning management system that can be controlled by touch screen.
2-1	Option	Hardware	iTM plus adaptor
2-2	Option	Software	iTM power proportional distribution
2-3	Option	Software	iTM energy navigator
2-4	Di unit	DEC101A51	• Building energy consumption is visualised. Wasted air conditioning energy can be found out.
2-5	Dio unit	DEC102A51	• 8 pairs based on a pair of ON/OFF input and abnormality input.
2-6	Dio unit	DEC102A51	• 4 pairs based on a pair of ON/OFF input and abnormality input.
3	*1 Interface for use in BACnet®	DMS502B51	• Interface unit to allow communications between VRV and BMS. Operation and monitoring of air conditioning systems through BACnet® communication.
3-1	Optional DIII board	DAM411B51	• Expansion kit, installed on DMS502B51, to provide 2 more DIII-NET communication ports. Not usable independently.
3-2	Optional Di board	DAM412B51	• Expansion kit, installed on DMS502B51, to provide 16 more wattmeter pulse input points. Not usable independently.
4	*2 Interface for use in LONWORKS®	DMS504B51	• Interface unit to allow communications between VRV and BMS. Operation and monitoring of air conditioning systems through LonWorks® communication.
5	Home Automation Interface Adaptor	DTA116A51	• Use of the Modbus protocol enables the connection of the VRV system with a variety of home automation systems from other manufacturers.

## Notes:

\*1. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).

\*2. LonWorks® is a trademark of Echelon Corporation registered in the United States and other countries.

\*3. Installation box for ★ adaptor must be obtained locally.




## AIR HANDLING UNIT

### Integrate your air handling unit for large size spaces such as factories and for fresh air solutions.

Capacity range : 6 - 60 HP



- Easy design and installation
- The system is easy to design and install since no additional water systems such as boilers, tanks, gas connections, etc. are required
- Inverter controlled units
- Control of air temperature via standard Daikin wired remote control

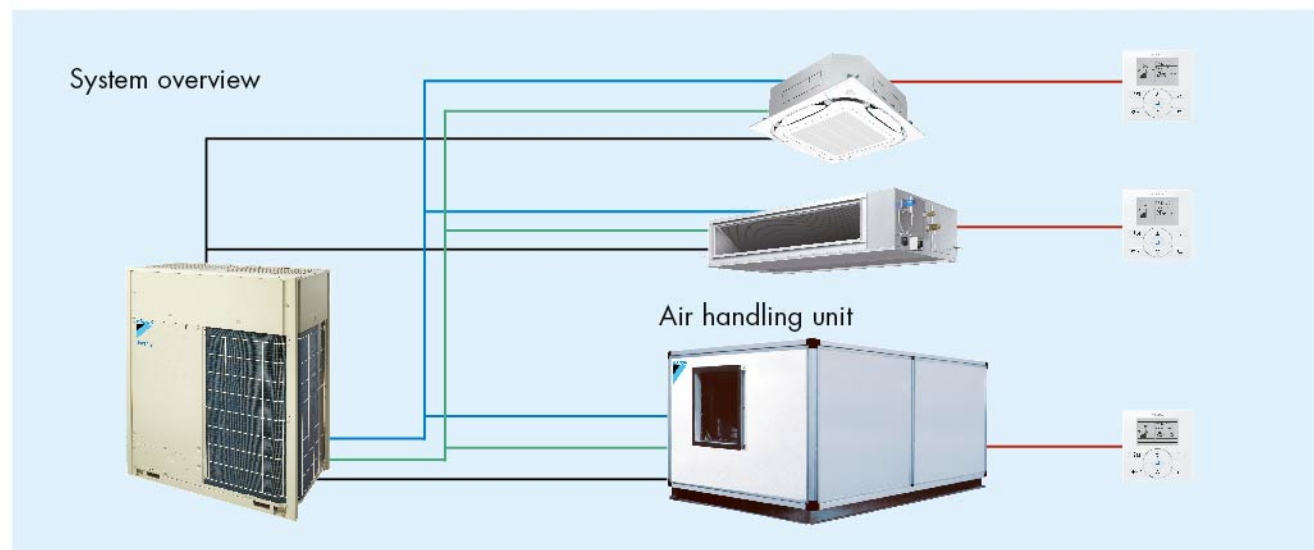

Air handling units can be connected to VRV systems. This combination can be built to order as a system. Outdoor air series is also possible. Please contact your local sales office for details.

\*Control box and expansion valve kit are necessary for integration of AHU and VRV system.

## HEADER PACK



### The Innovative Refrigerant Piping of next generation


Daikin innovated Next Generation of Quality and Efficiency for VRV Installation. It offers differentiated solutions in installation. It ensures quality installation with reduction of site work.



Header Pack

#### Advantage

- Installation time saving: Up to 1/3 of conventional method
- Easy to Install: Hanging points available
- Safety: Consists of flaring method, no brazing required\*
- Space saving: Head pack to Indoor unit soft drawn pipe, top side of refrigerant pipe doesn't need space for brazing torch movement
- Quality Installation: Elimination of difficult process, enhancing quality Installation

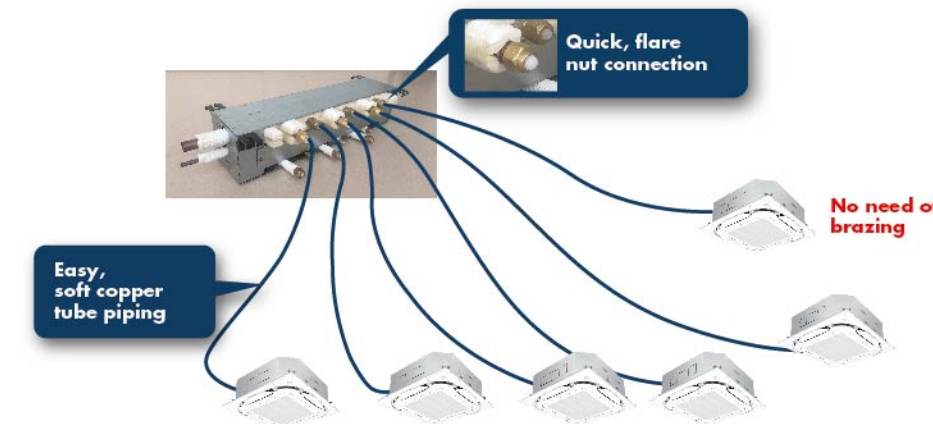

### Compact design to fit into narrow attic space

Light weight and the compact body give minimum damage on the building structure.

### Header Pack Line-up

Model Name	HP	Piping connections (Liquid/Gas mm)		Indoor unit total capacity index
		Outdoor unit side	Indoor unit side	
BHF6RHP6	6	Φ9.5/Φ15.9	(Φ9.5/Φ15.9)×1 (Φ6.4/Φ12.7)×3	<150
BHF8RHP6	8	Φ9.5/Φ19.1	(Φ9.5/Φ15.9)×3 (Φ6.4/Φ12.7)×3	150 ≤ X < 200
BHF10RHP6	10	Φ9.5/Φ22.2		200 ≤ X < 290
BHF16RHP6	16	Φ12.7/Φ28.6		290 ≤ X < 420



# DAIKIN GAS TIGHT JOINT (DGT)



## Non-brazed connection for Refrigerant piping


### Evolutionally - Advanced Feature

A combination of rubber packing and screwed metal body offers gas-tight and rigid connection without brazing. Patented "Leverage Method" mechanically holds the pipe and prevents it from pull-out.



### Mechanism

As the nut turns, the "B" point of leverage corns are compressed and encroached to the surface of the pipe. When the pull-out force increases, the corns are encroached more deeper to prevent pipe pull-out.

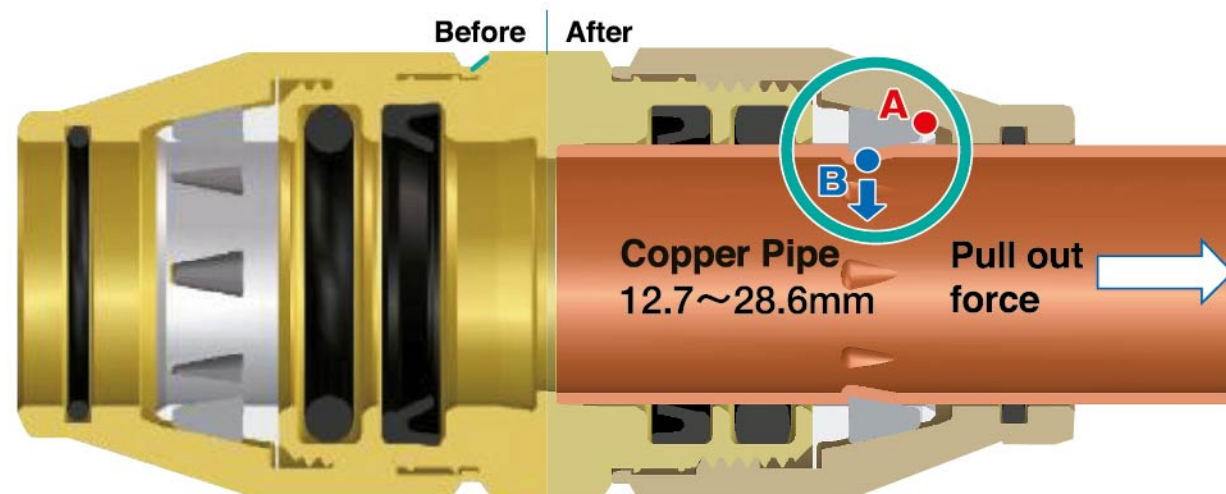

### Excellent performance

By the unique double sealing method, the sealing performance is secured over a long period even under such severe conditions as pressure of 4.3MPa during temperature of -45 °C through +130 °C.

### Durable for high pressure


By leverage method, the pull-out resistance is more than 4 times (17.2MPa) of the max. operating pressure.

### Easy Installation



The installation is completed by only one or two turns for a nut with low torque tightening without any special tools (regular wrenches or spanners are used) in the limited small space.

### Fire Free Connection

Neither nitrogen gas replacement nor fire prevention cure is required. The time for installation is shorten and the total cost is reduced. The installation quality is much more stable compared with a brazing method.

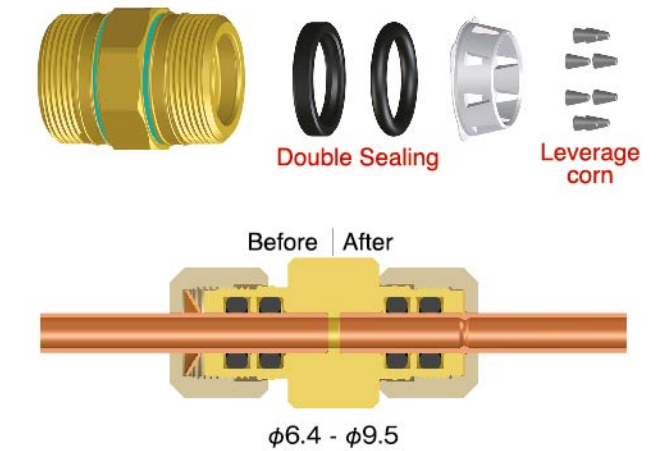

### Daikin Gas Tight Joint Line up

Figure	Model Name	Size (mm)			Weight/PC (gm)
		Inner Diameter	Outer Diameter	Length (L)	
	BDGTA06	Ø6.4	19.0	46.2	106
	BDGTA09	Ø9.5	22.2	51.4	139
	BDGTA12	Ø12.7	23.8	82.3	170
	BDGTA15	Ø15.9	29.7	82.8	236
	BDGTA19	Ø19.1	35.0	85.5	327
	BDGTA22	Ø22.2	38.0	93.5	401
	BDGTA28	Ø28.6	45.0	99.5	546





## VRV X


### AIR TREATMENT EQUIPMENT LINEUP

## AIR TREATMENT EQUIPMENT LINE-UP



Our air treatment systems create a higher air quality environment

### Components of Indoor Air Quality

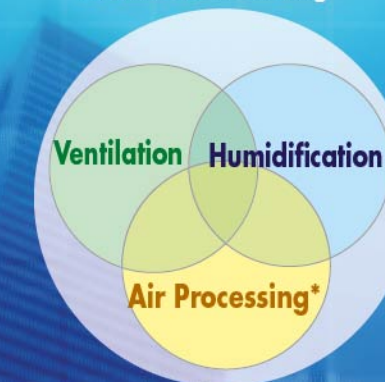

\*Refers to bringing outdoor air to near indoor temperature and delivering to a room.

A recent trend rapidly gaining popularity is the need for air treatment along with air conditioning. Our Outdoor-Air Processing Unit can combine fresh air treatment and air conditioning, supplied from a single system. It adjusts the temperature of air from outdoors using a fixed discharge temperature control. Along with Outdoor-Air Processing Units, we also offer Heat Reclaim Ventilator systems. The Heat Reclaim Ventilator VAM-GJ series units in particular have been praised for their compactness, energy conservation and extensive operation range of outdoor temperatures. This series provides higher enthalpy efficiency ★<sup>1</sup>, due to the greatly enhanced performance of the thin film element. Furthermore, improved external static pressure ★<sup>2</sup> offers more flexibility for installation. The Heat Reclaim Ventilator VKM-GAM series units, equipped with a DX-coil and a humidifier, provide further advanced features, such as temperature adjustment to suit conditions indoors and to prevent cold air from blowing on people directly during heating operation. The series also realises significant energy savings by exercising heat recovery.

★1 For models: VAM 250/650/800/1000/2000GJVE

★2 For models: VAM 500GJVE



## AIR TREATMENT EQUIPMENT LINE-UP



		Outdoor-Air Processing Unit	Heat Reclaim Ventilator		
			VKM-GAM Type	VKM-GA Type	VAM-GJ Type
Connections with VRV X	Refrigerant Piping	Connectable	Connectable	Connectable	Not connectable
	Wiring	Connectable	Connectable	Connectable	Connectable
	After-cool & After-heat Control	Available	Available	Available	Not available
Heat Exchange Element		—	Energy savings obtained		Energy savings obtained
Humidifier		—	Fitted	—	—
High Efficiency Filter		Option	Option		Option
Ventilation System		Air supply only	Air supply & air exhaust		Air supply & air exhaust
Power Supply		220-240 V, 50 Hz	220-240 V, 50 Hz		220-240 V/220 V, 50 Hz
Airflow Rate			250 m <sup>3</sup> /h		250 m <sup>3</sup> /h
			500 m <sup>3</sup> /h		500 m <sup>3</sup> /h
			650 m <sup>3</sup> /h		650 m <sup>3</sup> /h
			800 m <sup>3</sup> /h		800 m <sup>3</sup> /h
		1080 m <sup>3</sup> /h	1000 m <sup>3</sup> /h		1000 m <sup>3</sup> /h
		1680 m <sup>3</sup> /h			1500 m <sup>3</sup> /h
		2100 m <sup>3</sup> /h			2000 m <sup>3</sup> /h

\*Refers to bringing outdoor air to near indoor temperature and delivering to a room.

## Outdoor-Air Processing Unit


Combination of fresh air treatment and air conditioning, supplied from a single system.

### Lineup

Model Name	FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Capacity Index	125	200	250




Fresh air treatment and air conditioning can be achieved with a single system by using the heat pump technology - without the usual troublesome air supply and air discharge balance design. Fan coil units for air conditioning and an outdoor-air processing unit can be connected to the same refrigerant line. The results are enhanced design flexibility and a significant reduction in total system costs.

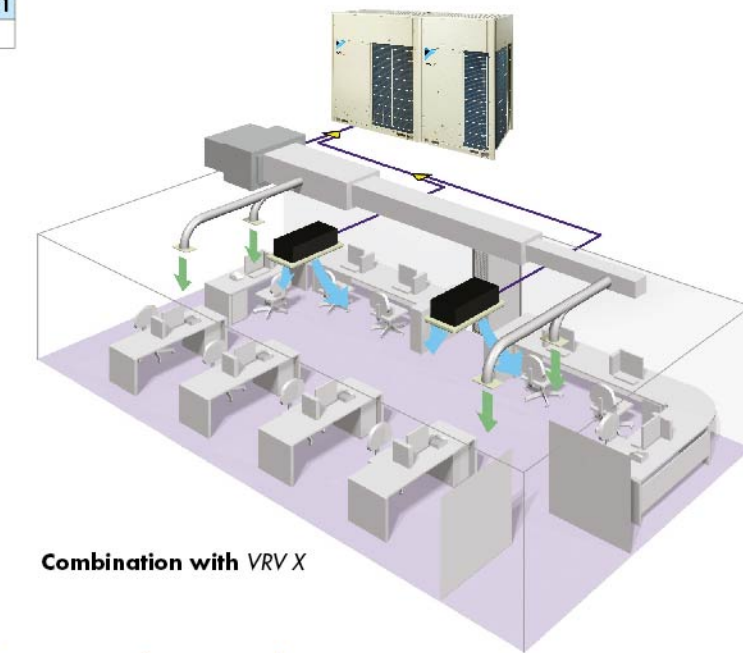

Combination with VRV X

Air conditioning and outdoor air processing can be accomplished using a single system.

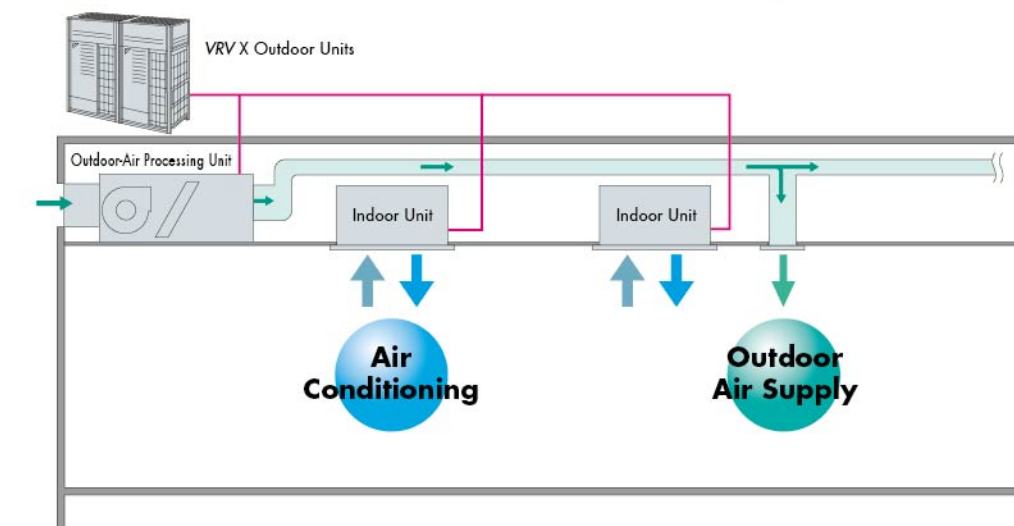

### Connection Conditions

The following restrictions must be observed in order to maintain the indoor units connected to the same system.

- When outdoor-air processing units are connected, the total connection capacity index must be 50% to 100% of the capacity index of the outdoor units.
- When outdoor-air processing units and standard indoor units are connected, the total connection capacity index of the outdoor-air processing units must not exceed 30% of the capacity index of the outdoor units.
- Outdoor-air processing units can be used without indoor units.



## AIR TREATMENT EQUIPMENT LINE-UP



## Standard Specifications

## Indoor unit

Type			Ceiling Mounted Duct Type		
Model			FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Power supply			1-phase 220-240 V (also required for indoor units), 50 Hz		
Cooling capacity *1	kcal/h		12,000	19,300	24,100
	Btu/h		47,800	76,400	95,500
	kW		14.0	22.4	28.0
Heating capacity *1	kcal/h		7,700	12,000	15,000
	Btu/h		30,400	47,400	59,400
	kW		8.9	13.9	17.4
Power consumption	kW		0.359	0.548	0.638
Casing			Galvanised steel plate		
Dimensions (H×W×D)		mm	470×744×1,100	470×1,380×1,100	
Fan	Motor output		kW	0.380	
	Airflow rate	m³/min	18	28	35
		cfm	635	988	1,236
	External static pressure	220 V/240 V	Pa	185/225	225/275
Air filter			*2		
Refrigerant piping	Liquid	mm	ø9.5 (flare)		
	Gas	mm	ø15.9 (flare)	ø19.1 (brazing)	ø22.2 (brazing)
	Drain	mm	PS1B female thread		
Machine weight		kg	86	123	
Sound level *3		220 V/240 V	dB(A)	42/43	47/48
Connectable outdoor units *4 *5			6 HP and above		10 HP and above
Operation range (Fan mode operation between 15 and 19°C)	Cooling	19 to 43°C			
	Heating	-5 to 15°C			
Range of the discharge temperature *6	Cooling	13 to 25°C			
	Heating	18 to 30°C			

Notes: \*1. Specifications are based on the following conditions:  
 • Cooling: Outdoor temp. of 33°CDB, 28°CWB (68% RH), and discharge temp. of 18°CDB.  
 • Equivalent reference piping length: 7.5 m (0 m horizontal)  
 \*2. An intake filter is not supplied, so be sure to install the optional long-life filter or high-efficiency filter. Please mount it in the duct system of the suction side. Select a dust collection efficiency (gravity method) of 50% or more.  
 \*3. Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. These values are normally somewhat higher during actual operation as a result of ambient conditions.

\*4. It is possible to connect to the outdoor unit if the total capacity of the indoor units is 50% to 100% of the capacity index of the outdoor units.  
 \*5. It is not possible to connect to the 6 HP outdoor unit.  
 \*6. Local setting mode. Not displayed on the remote controller.  
 • This equipment cannot be incorporated into the remote group control of the VRV X system.

## Options

## Indoor unit


Model			FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1
Operation/control	Operation remote controller		BRC1E62/BRC1C62		
	Central remote controller		DCS302CA61		
	Unified ON/OFF controller		DCS301BA61		
	Schedule timer		DST301BA61		
	Wiring adaptor for electrical appendices (1)		KRP2A61		
	Wiring adaptor for electrical appendices (2)		KRP4AA51a		
Filters	Long-life replacement filter		KAFJ371L140	KAFJ371L280	
	High-efficiency filter	Colourimetric method 65%	KAFJ372L140	KAFJ372L280	
		Colourimetric method 90%	KAFJ373L140	KAFJ373L280	
	Filter chamber *1		KDJ3705L140	KDJ3705L280	
Drain pump kit			KDU30L250VE		
Adaptor for wiring			KRP1B61		

Notes: \*1. Filter chamber has a suction-type flange. (Main unit does not.)  
 • Dimensions and weight of the equipment may vary depending on the options used.  
 • Some options may not be usable due to the equipment installation conditions, so please confirm prior to ordering.

• Some options may not be used in combination.  
 • Operating sound may increase somewhat depending on the options used.

## Dimensions

## FXMQ125/200/250MFV1

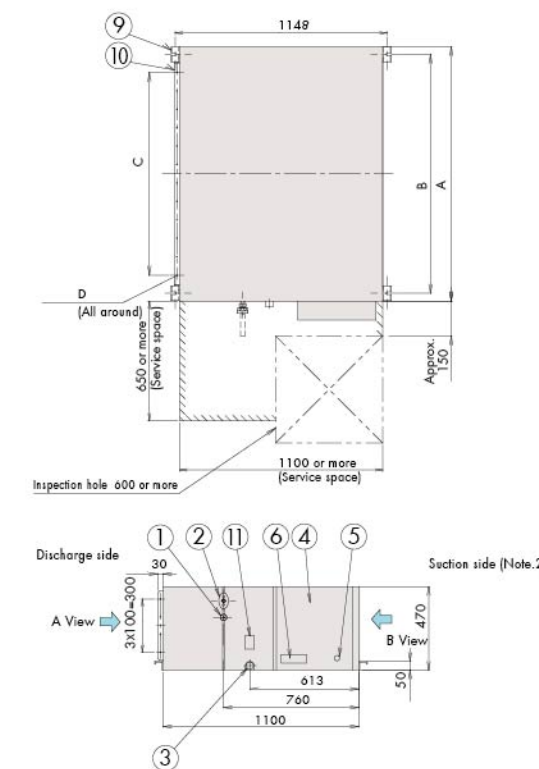

## Local connection piping size

Model	Gas piping diameter	Liquid piping diameter
FXMQ125MFV1	ø15.9	ø9.5
FXMQ200MFV1	ø19.1 attached piping	ø9.5
FXMQ250MFV1	ø22.2 attached piping	ø9.5

## Table of dimensions


Model	A	B	C	D
FXMQ125MFV1	744	685	5x100=500	20-ø 4.7 hole
FXMQ200MFV1	1380	1296	11x100=1100	32-ø 4.7 hole
FXMQ250MFV1	1380	1296	1380	32-ø 4.7 hole

## Notes:


- The attached piping in the diagram is for FXMQ200MFV1 and FXMQ250MFV1 only. The gas piping connection port (2) in the diagram has a different bore form with FXMQ125MFV1.
- An air filter is not supplied with this unit. Be sure to mount an air filter in the suction side. [Use a filter with dust collection efficiency of at least 50% (gravimetric method). This is available as an option.]
- For outdoor ducts, be sure to provide heat insulation to prevent condensation.

- ① Liquid pipe connection
- ② Gas pipe connection
- ③ Drain piping connection
- ④ Electric parts box
- ⑤ Ground terminal
- ⑥ Name plate
- ⑦ Power supply wiring connection
- ⑧ Transmission wiring connection
- ⑨ Hanger bracket
- ⑩ Discharge companion flange
- ⑪ Water supply port
- ⑫ Attached piping (Note. 1)

## FXMQ200/250MFV1

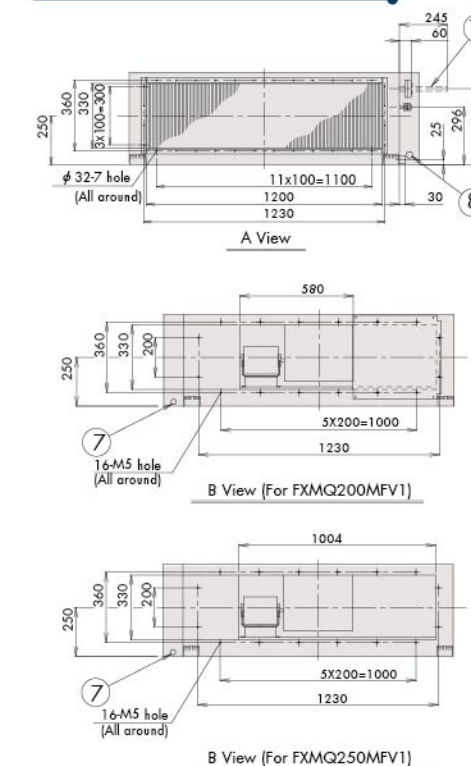

## FXMQ125MFV1

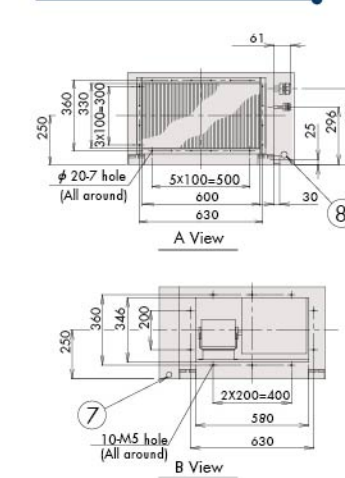




## AIR TREATMENT EQUIPMENT LINE-UP



### Heat Reclaim Ventilator with DX-Coil and Humidifier-VKM Series

The Heat Reclaim Ventilator lineup features the DX-coil in response to recently diversifying outdoor air introduction requirements.

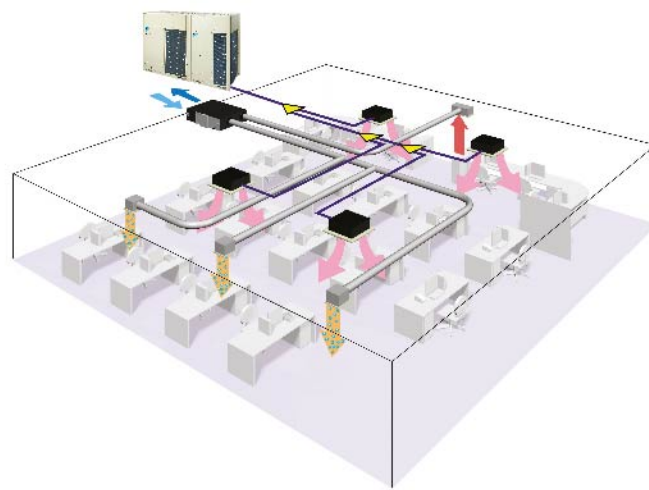

#### Line-up

	With DX Coil & Humidifier Type		
Model Name	VKM50GAMV1	VKM80GAMV1	VKM100GAMV1
Capacity Index	31.25	50	62.5

	With DX Coil Type		
Model Name	VKM50GAV1	VKM80GAV1	VKM100GAV1
Capacity Index	31.25	50	62.5

VKM80GAV1



#### Humidifier

The line-up includes models with a humidifier, in response to diversifying customer requirements. (VKM50/80/100GAMV1 only)

#### DX-coil

The Heat Reclaim Ventilator features DX-coil that contributes to the prevention of cold airflow hitting people directly during heating operation, due to the after-cool, after-heat operations done beforehand.


#### High static pressure

High external static pressure means enhanced design flexibility.

#### Efficient outdoor air introduction is possible

The Heat Reclaim Ventilator (VKM series) series introduces fresh outdoor air with minimum heat losses, while a wide variety of features responds to customer requirements.

#### Air conditioning and outdoor air processing can be accomplished using a single system.

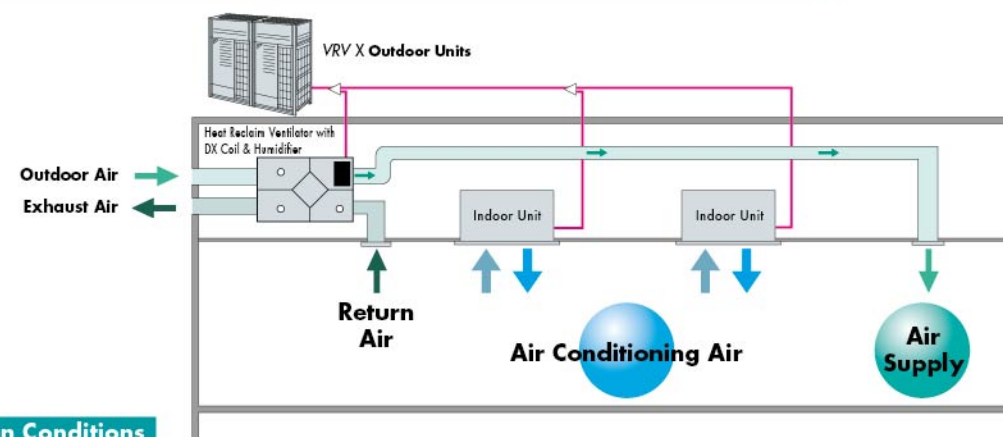


#### Connection Conditions

The following restrictions must be observed in order to maintain the indoor units connected to the same system.

- When the Heat Reclaim Ventilator VKM series units are connected, the total connection capacity index must be 50% to 130% of the capacity index of the outdoor units.


### Heat Reclaim Ventilator with DX-Coil and Humidifier-VKM Series

A compact unit packed with our cutting-edge technology

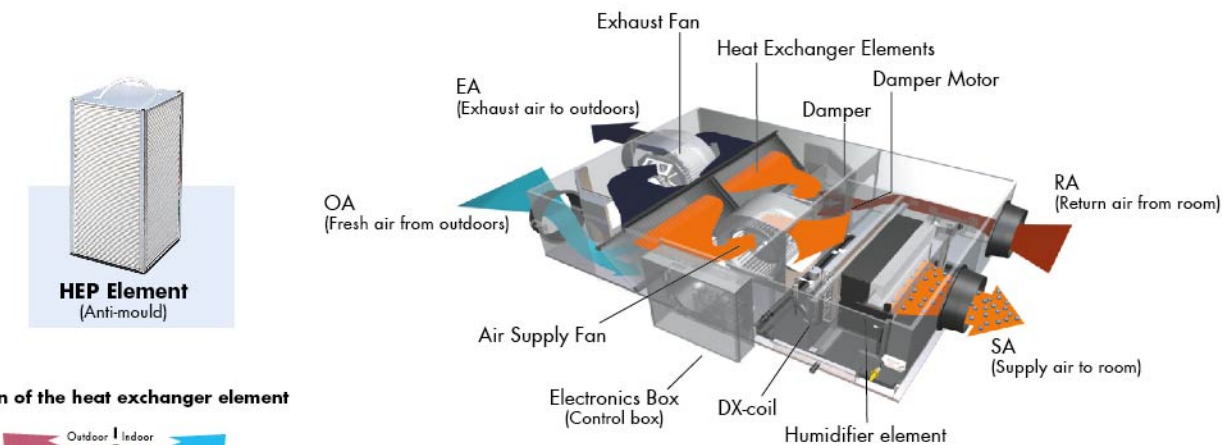


HEP Element  
(Anti-mould)

#### Operation of the heat exchanger element

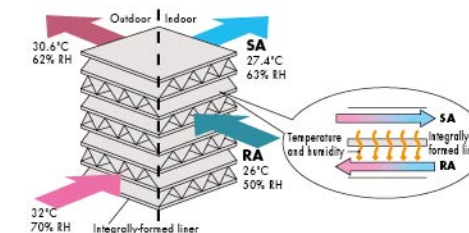


DX-coil (Direct expansion coil)



Humidifier element

#### Heating and humidification process

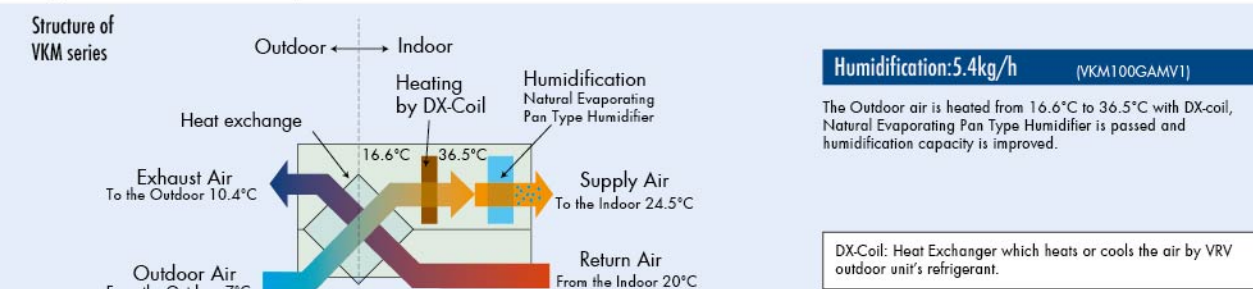


#### Efficient outdoor air introduction with heat exchanger and cooling/heating operations

##### Indoor unit with outdoor air treatment

Using outdoor air, the temperature can be brought near room temperature with minimal cooling capacity through the use of outdoor air.

##### Other features

- Integrated system includes ventilation and humidifying operations.
- Ventilation, cooling/heating and humidifying are possible with one remote controller.

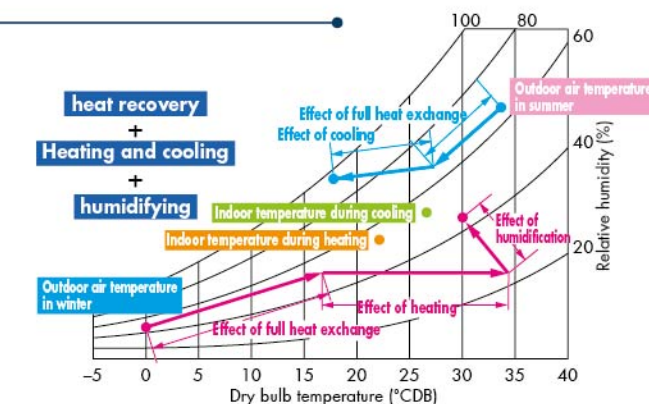



## AIR TREATMENT EQUIPMENT LINE-UP



## Specifications

MODEL				VKM50GAMV1 •	VKM80GAMV1 •	VKM100GAMV1 •	VKM50GAV1	VKM80GAV1	VKM100GAV1	
Refrigerant				R-410A						
Power Supply				1-phase, 220~240 V, 50 Hz						
Airflow Rate & Static Pressure (Note 7)		Ultra-high	Airflow rate	m³/h	500	750	950	500	750	950
			Static pressure	Pa	160	140	110	180	170	150
		High	Airflow rate	m³/h	500	750	950	500	750	950
			Static pressure	Pa	120	90	70	150	120	100
		Low	Airflow rate	m³/h	440	640	820	440	640	820
			Static pressure	Pa	100	70	60	110	80	70
Power Consumption		Heat exchange mode	Ultra-high	W	560	620	670	560	620	670
			High		490	560	570	490	560	570
			Low		420	470	480	420	470	480
		Bypass mode	Ultra-high	W	560	620	670	560	620	670
			High		490	560	570	490	560	570
			Low		420	470	480	420	470	480
Fan Type				Sirocco Fan						
Motor Output				kW	0.280 x 2	0.280 x 2	0.280 x 2	0.280 x 2	0.280 x 2	0.280 x 2
Sound Level (Note 5) (220/230/240 V)		Heat exchange mode	Ultra-high	dB(A)	37/37.5/38	38.5/39/40	39/39.5/40	38/38.5/39	40/41/41.5	40/40.5/41
			High		35/35.5/36	36/37/37.5	37/37.5/38	36/36.5/37	37.5/38/39	38/38.5/39
			Low		32/33/34	33/34/35.5	34/34.5/35.5	33.5/34.5/35.5	34.5/36/37	35/36/36.5
		Bypass mode	Ultra-high	37/37.5/38	38.5/39/40	39/39.5/40	38/38.5/39	40/41/41.5	40/40.5/41	
			High	35/35.5/36	36/37/37.5	37/37.5/38	36/36.5/37	37.5/38/39	38/38.5/39	
			Low	32/33/34	33/34/35.5	34/34.5/35.5	33.5/34.5/35.5	34.5/36/37	35/36/36.5	
Humidification Capacity (Note 4)				kg/h	2.7	4.0	5.4	—		
Temp. Exchange Efficiency		Ultra-high	%	76	78	74	76	78	74	
		High		76	78	74	76	78	74	
		Low		77.5	79	76.5	77.5	79	76.5	
Enthalpy Exchange Efficiency (Cooling)		Ultra-high	%	64	66	62	64	66	62	
		High		64	66	62	64	66	62	
		Low		67	68	66	67	68	66	
Enthalpy Exchange Efficiency (Heating)		Ultra-high	%	67	71	65	67	71	65	
		High		67	71	65	67	71	65	
		Low		69	73	69	69	73	69	
Casing				Galvanised Steel Plate						
Insulating Material				Self-Extinguishable Urethane Foam						
Heat Exchanging System				Air to Air Cross Flow Total Heat (Sensible + Latent Heat) Exchange						
Heat Exchanger Element				Specially Processed Non-flammable Paper						
Air Filter				Multidirectional Fibrous Fleeces						
DX-coil Capacity	Cooling (Note 2)		kW	2.8	4.5	5.6	2.8	4.5	5.6	
	Heating (Note 3)			3.2	5.0	6.4	3.2	5.0	6.4	
Dimensions		Height	mm	387	387	387	387	387	387	
		Width		1,764	1,764	1,764	1,764	1,764	1,764	
		Depth		832	1,214	1,214	832	1,214	1,214	
Connection Duct Diameter			mm	Ø 200	Ø 250		Ø 200	Ø 250		
Machine Weight		Net	kg	102	120	125	96	109	114	
		Gross (Note 8)		107	129	134	—			
Unit Ambient Condition		Around Unit		0°C~40°C DB, 80%RH or less						
		OA (Note 9)		-15°C~40°C DB, 80%RH or less						
		RA (Note 9)		0°C~40°C DB, 80%RH or less						

**Notes:**

1. Cooling and heating capacities are based on the following conditions. Fan is based on High and Ultra-high. When calculating the capacity at indoor with, GY1: 5.6 kW, VKM50GAMV1/GY1: 7.0 kW, VKM50GAMV1/GY1: 5.6 kW, VKM100GAMV1/GY1: 7.0 kW
2. Indoor temperature: 27°C DB, 19°C WB, Outdoor temperature: 35°C DB
3. Indoor temperature: 20°C DB, Outdoor temperature: 7°C DB, 6°C WB
4. Humidifying capacity is based on the following conditions: Indoor temperature: 20°C DB, 15°C WB, Outdoor temperature: 7°C DB, 6°C WB
5. The operating sound measured at the point 1.5 m below the centre of the unit is converted to that measured in an anechoic chamber built in accordance with the IEC 1502 conditions. The actual operating sound varies depending on the surrounding conditions (near running unit's sound, reflected sound and so on) and is normally higher than this value.

For operation in a quiet room, it is required to take measures to lower the sound.

For details, refer to the Engineering Data.

6. The noise level at the air discharge port is about 8-11 dB(A) or higher than the unit's operating sound. For operation in a quiet room, it is required to take measures to lower the sound.
7. Airflow rate can be changed over to Low mode and High mode.
8. In case of holding full water in humidifier.
9. OA: fresh air from outdoor. RA: return air from room.
10. Specifications, design and information here are subject to change without notice.
11. Power consumption and efficiency depend on the above value of airflow rate.

12. Temperature exchange efficiency is the mean value for Cooling and Heating. Efficiency is measured under the following condition: Ratio of rated external static pressure outdoor air inlet is kept constant at 7° to 1.
13. In heating operation, freezing of the outdoor unit is cool increases. Heating capability decreases and the system goes into defrost operation. During defrost operation, the fans of the unit continue driving (factory setting). The purpose of this is to maintain the amount of ventilation and humidifying.
14. When connecting with a VRV system heat recovery outdoor unit and bringing the RA (exhaust gas intake) of this unit directly in from the ceiling, connect to a BS unit identical to the VRV indoor unit (master unit), and use group-linked operation. (See the Engineering Data Table for details.)
15. When connecting the indoor unit directly to the duct, always use the same system on the indoor unit as with the outdoor unit, perform group-linked operation, and make the direct duct connection settings from the remote controller. (Mode No. "17 (27)" – First code No. "5" – Second code No. "6"). Also, do not connect to the outlet side of the indoor unit. Depending on the fan strength and static pressure, the unit might back up.

★ Feed clean water (city water, tap water or equivalent). Dirty water may clog the valve or cause dirt deposits in the water container, resulting in poor humidifier performance. (Never use any cooling tower water and heating-pump water.)


Also, if the supply water is hard water, use a water softener because of short life.

- Life of humidifying element is about 3 years (4,000 hours) under the supply water conditions of hardness: 150 mg/l. (Life of humidifying element is about 1 year (1,500 hours) under the supply water conditions of hardness: 400 mg/l.)

Annual operating hours: 10 hours/day x 26 days/month x 5 months = 1,300 hours

## Dimensions

## VKM50/80/100GA(M)V1

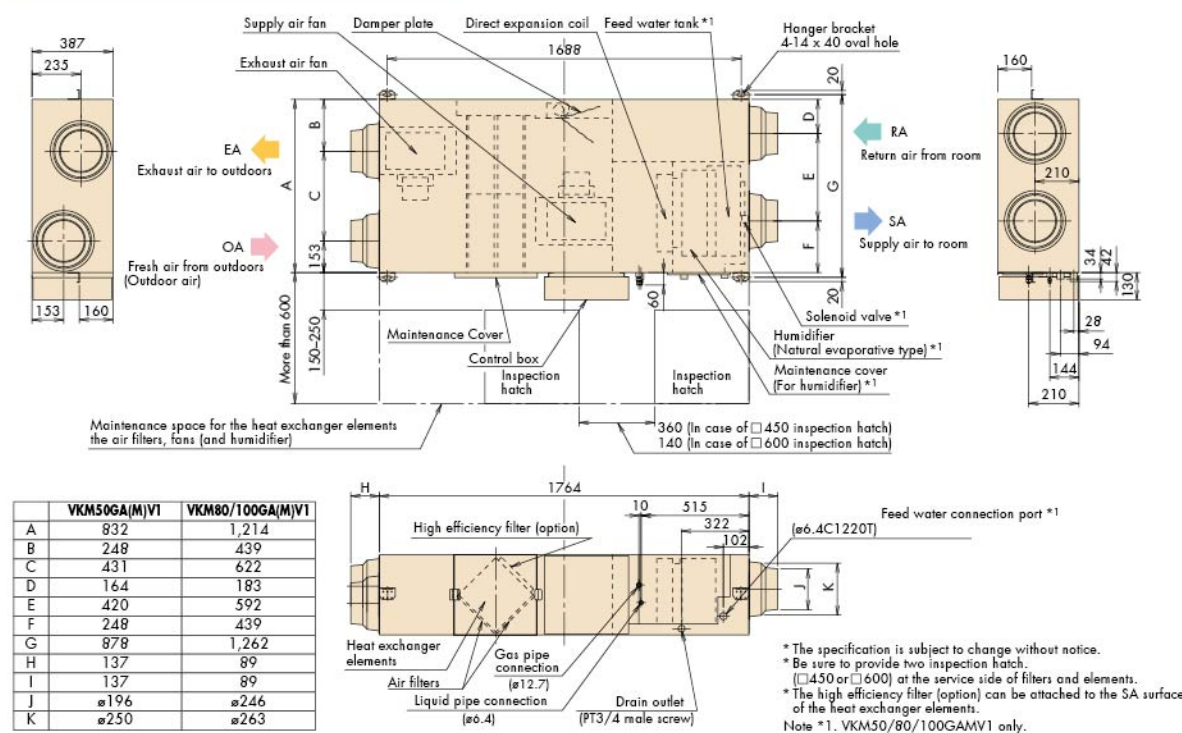

## Options

Item		Type	VKM50/80/100GA(M)V1												
Controlling device	Remote controller		BRC1E62/BRC1C62 *1												
	Centralised controlling device	Residential central remote controller	DCS303A51 *2												
		Central remote controller	DCS302CA61												
		Unified ON/OFF controller	DCS301BA61												
		Schedule timer	DST301BA61												
	Wiring adaptor for electrical appendices		KRP2A61												
	For humidifier running ON signal output		KRP50-2												
	For heater control kit		BRP4A50												
	PC board Adaptor	For wiring	Type (indoor unit of VRV)	FXFG-S FXFG-AVM	FXZQ-M	FXUG-A	FXCQ-M	FXKQ-MA	FXDQ-PD FXDQ-ND	FXMQ-P FXMQ-AR	FXMQ-QA	FXHQ-MA	FXAQ-P	FXLQ-MA FXNQ-MA	FXVQ-M
				KRP1C63 *	KRP1BA57 *	KRP1C67	KRP1B61 *	KRP1B61	KRP1B56 *	KRP1C64 *	KRP1B61	KRP1BA54	—	KRP1B61	KRP1C67
Installation box for adaptor PCB ☆		Notes 2, 3 KRP1H98	Note 4, 6 KRP1BA101	—	Notes 2, 3 KRP1B96	—	Notes 4, 6 KRP1BA101	Notes 2, 3 KRP1A96	—	Note 3 KRP1CA93	Notes 2, 3 KRP4AA93	—	—		

**Notes:** 1. Installation box ☆ is necessary for each adaptor marked ☆.  
2. Up to 2 adaptors can be fixed for each installation box.  
3. Only one installation box can be installed for each indoor unit.  
4. Up to 2 installation boxes can be installed for each indoor unit.  
5. Installation box ☆ is necessary for second adaptor.  
6. Installation box ☆ is necessary for each adaptor.  
7. \*1 Necessary when operating a Heat Reclaim Ventilator (VKM) independently. When operating interlocked with other air conditioners, use the remote controllers of the air conditioners.  
\*2 For residential use only. When connected to a Heat Reclaim Ventilator (VKM), you can only switch the power ON/OFF. Cannot be used with other centralised control equipment.

Item			Type	VKM50GA(M)/V1	VKM80GA(M)/V1	VKM100GA(M)/V1
Additional function	Silencer			—		KDDM24B100
		Nominal pipe diameter	mm	—		ø 250
	Air suction / Discharge grille	White		K-DGL200B		K-DGL250B
		Nominal pipe diameter	mm	ø 200		ø 250
	High efficiency filter			KAF242J80M		KAF242J100M
	Air filter for replacement			KAF241G80M		KAF241G100M
Flexible duct (1 m)			K-FDS201D		K-FDS251D	
Flexible duct (2 m)			K-FDS202D		K-FDS252D	



# AIR TREATMENT EQUIPMENT LINE-UP



## Heat Reclaim Ventilator – VAM Series

The Heat Reclaim Ventilator creates a high-quality environment by interlocking with the air conditioner

### Model Name

VAM250GJVE, VAM500GJVE, VAM650GJVE,  
VAM800GJVE, VAM1000GJVE, VAM1500GJVE,  
VAM2000GJVE

**Improved Enthalpy Efficiency<sup>\*1</sup>**  
**Higher External Static Pressure<sup>\*2</sup>**  
**Enhanced Energy Saving Functions**




**Heat Reclaim Ventilator remote controller<sup>\*</sup>**  
**BRC301B61 (Option)**  
This remote controller is used in case of independent operated of Heat Reclaim Ventilator.

This VAM series provides higher Enthalpy Efficiency<sup>\*1</sup> due to the greatly enhanced performance of the thin film element. Furthermore, improved external static pressure<sup>\*2</sup> offers more flexibility of installation. Along with these three outstanding improvement, the night-time free cooling operation contributes to energy conservation and more comfortable space.

<sup>\*1</sup> For Model: VAM150/250/350/650/800/1000/2000GJVE

<sup>\*2</sup> For models: VAM150/250/500GJVE

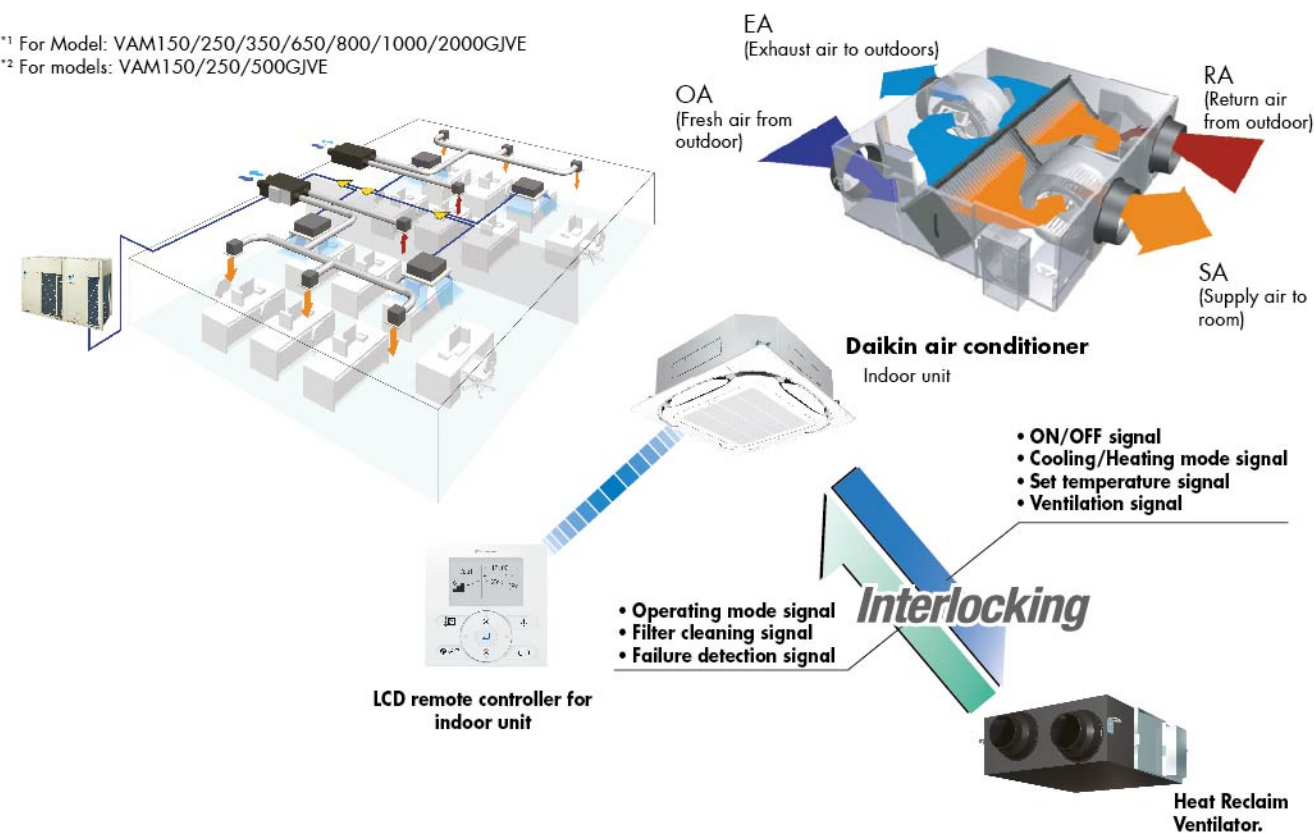

### Compact Equipment

With a height of just 306mm, the unit easily fits in limited spaces, such as above ceiling.




<sup>\*</sup>For VAM500GJVE

### Energy Conservation

Air conditioning load reduced by approximately 31%

### Cold Climate Compatible

Standard operation at temperatures down to -15°C.

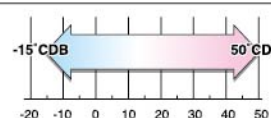

## Heat Reclaim Ventilator – VAM Series

Air conditioning load reduced by approximately 31%

### Total heat exchange ventilation

This unit recovers heat energy lost through ventilation and curbs room temperature changes caused by ventilation, thereby conserving energy and reducing the load on the air conditioning system.


### Enthalpy Efficiency drastically improved by employing thin film element (VAM-GJ model)

Due to thinner film.....

- Decreases the moisture resistance of the partition sheets drastically.
- Realises more space for extra layers in the element, resulting in increased effective area that supply and exhaust air can be exposed to.

Moisture absorption increased by approx. 10%

Thickness of the partition sheet  
**40 μm**

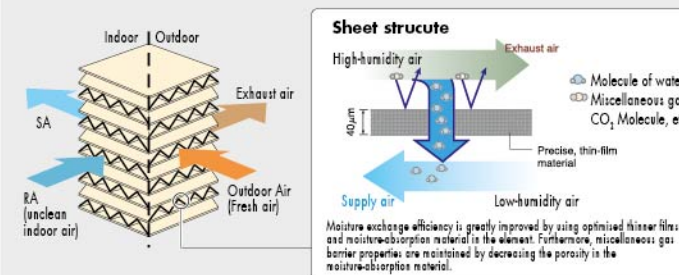

**23%**



### Auto-ventilation Mode Changeover Switching

**6%**

Automatically switches the ventilation mode (Total heat Exchange Mode/Bypass Mode) according to the operating status of the air conditioner.



### Pre-cool, Pre-heat Control

**2%**


Reduces air conditioning load by not running the Heat Reclaim ventilator while air is still clean soon after the air conditioner is turned ON.



**31%**

- The air conditioning load reduction value may vary according to weather and other environmental conditions at the location of the machine's installation.
- The air conditioning load reduction values are based on the following conditions:  
Application: Tokyo office building  
Building from: 6 floors above ground, 2 floors underground, floor area 2,100 m<sup>2</sup>  
Personnel density: 0.25 person/m<sup>2</sup>  
Ventilation volume: 25 m<sup>3</sup>/h  
Indoor air conditioning level: summer 25°C 50% RH, intermediate seasons 24°C 50% RH, Winter 22°C 40%RH  
Operating time: 2746 hours (9 hours per day, approx. 25 days per month)  
Calculation method: simulation based on "MICRO-HASP/1982" of the Japan Building Mechanical and Electrical Engineers Association.

### Air conditioning Loads Reduced by Approximately

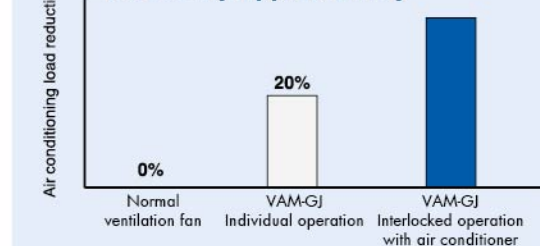


## Night-time free cooling operation<sup>\*1</sup>


Night-time free cooling operation is an energy-conserving function that works at night when air conditioners are off. By ventilating rooms containing equipment that raises that room temperature, night-time free cooling operation reduces the cooling load when air conditioners are turned on in the morning. It also alleviated feeling of discomfort in the morning caused by heat accumulated during the night.

Air conditioning sensible heat load reduced by  
**approx. 5%<sup>\*2</sup>**

The indoor accumulated heat is discharged at night. This reduces the air conditioning load the next day thereby increasing efficiency.

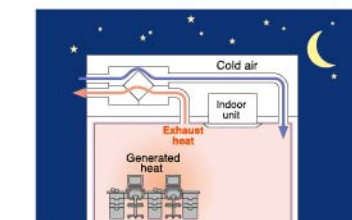

Heat is discharged

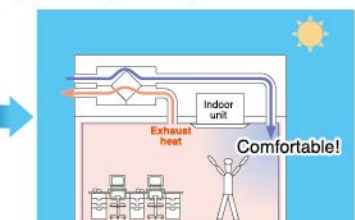

The load is small so the temperature is rapidly reduced to a comfortable level.

<sup>\*</sup> Interlocked operation with an air conditioner.

- Night-time free cooling operation only works to cool and if connected to Building Multi or VRV systems.
- Night-time free cooling operation is set to "off" in the factory setting, so if you wish to use it, request your dealer to turn it on.

<sup>\*1</sup> This Function can be operated only when interlocked with air conditioners.

<sup>\*2</sup> Value is based on the following conditions:

- Cooling operation performed from April to October.
- Calculated for air conditioning sensible heat load only (latent heat load not included).



## AIR TREATMENT EQUIPMENT LINE-UP




## Specifications

MODEL			VAM250GJVE	VAM500GJVE	VAM650GJVE	VAM800GJVE	VAM1000GJVE	VAM1500GJVE	VAM2000GJVE	
Power Supply			1-phase, 220-240 V/ 220 V, 50 Hz							
Temp. Exchange Efficiency (50/60 Hz)	Ultra-High	%	75/75	74/74	75/75	72/72	78/78	72/72	77/77	
	High		75/75	74/74	75/75	72/72	78/78	72/72	77/77	
	Low		79/79	80/80.5	77/77.5	74/74.5	80.5/81	75.5/76	79/81	
Enthalpy Exchange Efficiency (50/60 Hz)	For Heating	Ultra-High	%	71/72	67/67	67.5/67.5	65/65	70/70	65/65	72/72
		High		71/71	67/67	67.5/67.5	65/65	70/70	65/65	72/72
		Low		74/74	74/74.5	71.5/72	67.5/68	72.5/73	67/67.5	76/76
	For Cooling	Ultra-High	%	63/63	55/55	61/61	61/61	64/64	61/61	62/62
		High		63/63	55/55	61/61	61/61	64/64	61/61	62/62
		Low		66/66	59/59.5	64/64.5	64/64.5	68.5/69	64/64.5	66/67
Power Consumption (50/60 Hz)	Heat Exchange Mode	Ultra-High	W	137/141	248/270	342/398	599/680	635/760	1,145/1,300	1,289/1,542
		High		120/125	225/217	300/332	517/597	567/648	991/1,144	1,151/1,315
		Low		60/59	128/136	196/207	435/483	476/512	835/927	966/1,039
	Bypass Mode	Ultra-High	W	137/141	248/270	342/398	599/680	635/760	1,145/1,300	1,289/1,542
		High		120/125	225/217	300/332	517/597	567/648	991/1,144	1,151/1,315
		Low		60/59	128/136	196/207	435/483	476/512	835/927	966/1,039
	Heat Exchange Mode	Ultra-High	dB(A)	27-29/29	33-35.5/34	34-36/36	39-40.5/39.5	39.5-41.5/39.5	39.5-41.5/41.5	41.5-43.5/42
		High		26-27.5/28	31.5-34/32	33-34.5/34	37-39.5/37.5	37.5-39.5/37.5	37.5-39.5/39.5	39-43/40
		Low		21-22/21	25-28.5/24	27.5-29.5/28	35-37.5/34	35-37.5/34.5	35-37.5/36	36-39/39
Sound Level (50/60 Hz)	Bypass Mode	Ultra-High	dB(A)	28.5-30.5/30.5	34.5-36/35.5	35-37.5/37.5	40.5-42/41	40.5-42.5/40.5	41-43/42.5	43-45.5/44
		High		27.5-29/29.5	33-34.5/33.5	33-35.5/35.5	38.5-40/39	38.5-40.5/38.5	39.5-41/41.5	40.5-45/42
		Low		22.5-23/22.5	25.5-28.5/25.5	27.5-30.5/29.5	36-38.5/35.5	36-38.5/35.5	36.5-38/37.5	37.5-39.5/41
Casing			Galvanised steel plate							
Insulation Material			Self-extinguishable polyurethane foam							
Dimensions (HXWXD)		mm	278X810X551	306X879X800	338X973X832	387X1,111X832	387X1,111X1,214	785X1,619X832	785X1,619X1,214	
Machine Weigh		kg	24	32	45	55	67	129	157	
Heat Exchange System			Air to air cross flow total heat (Sensible heat+latent heat) exchange							
Heat Exchange Element Material			Specially processed non-flammable paper							
Air Filter			Multidirectional fibrous fleeces							
Fan	Type		Sirocco fan							
	Airflow Rate (50/60 Hz)	Ultra-High	m³/h	250/250	500/500	650/650	800/800	1,000/1,000	1,500/1,500	2,000/2,000
		High		250/250	500/500	650/650	800/800	1,000/1,000	1,500/1,500	2,000/2,000
		Low		155/155	320/295	500/470	700/670	860/840	1,320/1,260	1,720/1,580
	External Static Pressure (50/60 Hz)	Ultra-High	Pa	70/96	105/150	85/125	133/170	168/192	112/150	116/140
		High		54.65	66/52	53/67	92/85	110/86	73/72	58/32
		Low		24/20	32/18	35/38	72/61	85/60	56/50	45/45
Motor Output		kW	0.030X2	0.090X2	0.140X2	0.280X2		0.280X4		
Connection Duct Diameter		mm	ø150	ø200		ø250		ø350		
Unit ambient condition			-15°C~50°CDB, 80%RH or less							

- Notes: 1. Sound level is measured at 1.5m below the centre of the body.  
2. Airflow rate can be changed over to Low mode or High mode.  
3. Sound level is measured in an anechoic chamber.  
Sound level generally becomes greater than this value depending on the operating conditions, reflected sound and peripheral noise.  
4. The sound level at the air discharge port is about 8 dB(A) higher than the unit's sound level.  
5. The specifications, designs and information given here are subject to change without notice.  
6. Temperature Exchange Efficiency is the mean value between cooling and heating.  
7. Efficiency is measured under the following conditions:  
Ratio of rated external static pressure has been maintained as follows; outdoor side to indoor side = 7 to 1.  
8. In conformance with JIS standards (JIS B 8628), operating sound level is based on the value when one unit is operated, with the value converted for an anechoic chamber.  
This is transmission sound from the main unit, and does not include sound from the discharge grille. Thus it is normal for the sound to be louder than the indicated value when the unit is actually installed.  
9. Sound level from the discharge port causes the value to be approximately 8 dB(A) (models with the airflow rate of less than 150 to 500m³/h) to approximately 11 dB(A) (models with the airflow rate of 650m³/h or more) greater than the indicated value. Furthermore, fan rotation and noise from the discharge grille may increase depending on the on-site duct resistance conditions. Please consider noise countermeasures when installing the unit.

10. With large models in particular (1500 and 2000m³/h models), if the supply air (SA) grille is installed near the main unit, the noise of the main unit may be heard from the discharge grille via the duct, and this will result in a marked increase in noise. In such cases, if peripheral effects are included (such as reverberation of the floor and walls, combination with other equipment, and background noise), sound level may be as much as 15 dB(A) higher than the indicated value. When installing a large model, please provide as much separation as possible between the main unit and the discharge grille. If the equipment and discharge grille are near each other, please consider countermeasures such as the following:  
• Use a sound-muffling box, flexible duct and sound-muffling air supply/discharge grilles  
• Decentralised installation of discharge grilles  
11. When installing in a location with particularly low background noise such as a classroom, please consider the following measures to avoid transmission sound from the main unit:  
• Use of ceiling materials with high sound insulating properties (high transmission loss).  
• Methods of blocking sound transmission, for example, by adding sound insulating materials around the bottom of the sound source.  
Alternatively, consider supplementary methods such as installing the equipment in a different location (corridor, etc.)

## Options

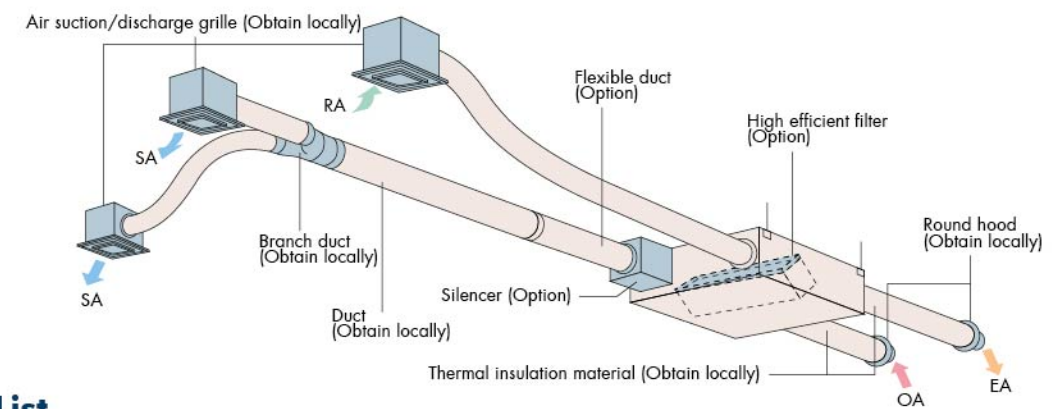

## Option List


Item	Type		VAM 250 • 500 • 650 • 800 • 1000 • 1500 • 2000 GJVE											
Controlling device	Centralised controlling device	Heat Reclaim Ventilator remote controller	BRC301B61											
		Residential central remote controller	DCS303A51 *1											
		Central remote controller	DCS302CA61											
		Unified ON/OFF controller	DCS301BA61											
		Schedule timer	DST301BA61											
	PC Board Adaptor	Wiring adaptor for electrical appendices	KRP2A61											
		For humidifier	KRP50-2											
		Installation box for adaptor PCB	KRP50-2A90 (Mounted electric component assy of Heat Reclaim Ventilator)											
		For heater control kit	BRP4A50											
	For wiring	Type (indoor unit of VRV)	FXFQ-S FXFQ-LU	FXZQ-M	FXUQ-A	FXCQ-M	FXKQ-MA	FXDQ-PB FXDQ-NB	FXMQ-P	FXMQ-MA	FXHQ-MA	FXAQ-P	FXLQ-MA FXNQ-MA	FXVQ-M
		KRP1C63★	KRP1BA57★	KRP1C67	KRP1B61★	KRP1B61	KRP1B56★	KRP1C64★	KRP1B61	KRP1BA54	—	KRP1B61	KRP1C67	
Installation box for adaptor PCB		☆	Notes 2, 3 KRP1H98	Note 4, 6 KRP1BA101	—	Notes 2, 3 KRP1B96	—	Notes 4, 6 KRP1BA101	Notes 2, 3 KRP4A96	—	Note 3 KRP1CA93	Notes 2, 3 KRP4AA93	—	—

- Notes: 1. Installation box ☆ is necessary for each adaptor marked ☆.  
2. Up to 2 adaptors can be fixed for each installation box.  
3. Only one installation box can be installed for each indoor unit.  
4. Up to 2 installation boxes can be installed for each indoor unit.  
5. Installation box ☆ is necessary for second adaptor.  
6. Installation box ☆ is necessary for each adaptor.  
7. \*1 For residential use only. When connected with a Heat Reclaim Ventilator (VAM), you can only switch the power ON/OFF. Cannot be used with other centralised control equipment.

Item	Type	VAM250GJVE	VAM500GJVE	VAM650GJVE	VAM800GJVE	VAM1000GJVE	VAM1500GJVE	VAM2000GJVE
Additional function	Silencer	—	KDDM24B50	—	KDDM24B100	—	KDDM24B100X2	—
	Nominal pipe diameter mm	—	—	ø 200	—	—	—	—
	High efficiency filter	KAF242J25M	KAF242J50M	KAF242J65M	KAF242J80M	KAF242J100M	KAF242J180MX2	KAF242J100MX2
	Air filter for replacement	KAF241J25M	KAF241J50M	KAF241J65M	KAF241J80M	KAF241J100M	KAF241J180MX2	KAF241J100MX2
Flexible duct (1 m)		K-FDS151D	K-FDS201D		K-FDS251D			
Flexible duct (2 m)		K-FDS152D	K-FDS202D		K-FDS252D			
Duct adaptor		—	—	—	—	—	YDFA25A1	—
Nominal pipe diameter mm		—	—	—	—	—	ø 250	—

## PC board adaptor for heater control kit (BRP4A50)

When the installation of an electric heater is required in a cold region, this adaptor with an internal timer function eliminates the complicated timer connecting work that was necessary with conventional heaters.

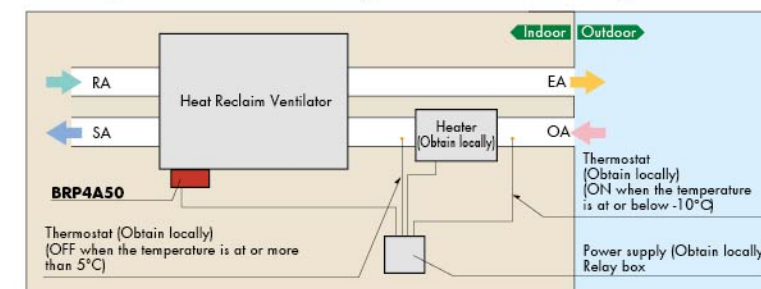

## Notes when installing

- Examine fully an installation place and specification for using the electric heater based on the standard and regulation of each country.
- Supply the electric heater and safety production devices such as a relay and a thermostat, etc. of which qualities satisfy the standard and regulation of each country at site.
- Use a non-inflammable connecting duct to the electric heater. Be sure to allow 2 m or more between the electric heater and the Heat Reclaim Ventilator for safety.
- For the Heat Reclaim Ventilator, use a different power supply from that of the electric heater and install a circuit breaker for each.